



A Dimensions: [mm]












Scale - 20:1

B Recommended land pattern: [mm]



WIDE BAND / HIGH SPEED: W = 2,2HIGH CURRENT: W = 2,6

Scale - 20:1

WÜRTH ELEKTRONIK

D Electrical Properties:

Properties	Test conditions		Value	Unit	Tol.
Impedance @ 100 MHz	100 MHz	Z	470	Ω	±25%
Maximum impedance	300 MHz	Z	780	Ω	typ.
Rated current	∆T = 20K	I _R	200	mA	max.
DC Resistance		R_{DC}	0.45	Ω	max.
		·		·	
Туре		·	Wide Band	·	

C Schematic:



E General information:

Do not use this part beyond the Rated Current, as this will create excessive heat and can harm the component Storage Temperature (on Tape & Reel): -20°C to 60°C Operating Temperature: -55°C to 125°C

Test conditions of Electrical Properties: 20°C, 33% RH

if not specified differently

				Projection .	
5.4	2012-11-28	SSt	SSt		
5.3	2012-10-23	SSt	SMu	Würth Elektronik eiSos Gmbl-	1 & Co. KG
5.2	2012-09-26	SSt	SMu	EMC & Inductive Solutions Max-Eyth-Str. 1	
5.1	2012-06-26	SSt	SSt	74638 Waldenburg	
5.0	2012-03-29	SSt	SMu	Germany Tel. +49 (0) 79 42 945 - 0	
4.0	2005-12-16	SSt	-	www.we-online.com eiSos@we-online.com	
REV	DATE	BY	CHECKED	GIOOSSWG GIIIIIIG.COIII	

DESCRIPTION

WE-CBF SMD EMI Suppression Ferrite Bead

Order.- No.


742792642



SIZE A4




F Typical Impedance Characteristics:

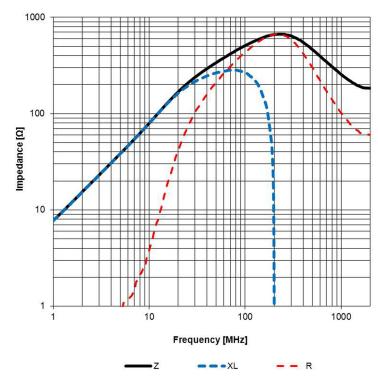


Test Equipment: E4991A or equivalent

F Derating Curve:

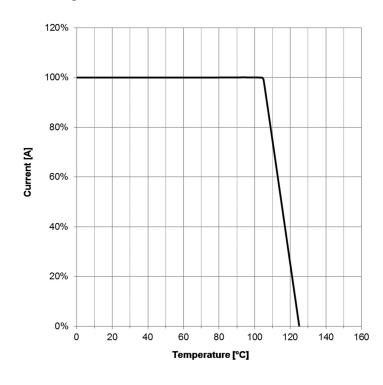


				Projection !		DESCRIPTION				
				-						
5.4	2012-11-28	SSt	SSt)-		■ WE-CBF SMD EMI Suppression Ferrite				
5.3	2012-10-23	SSt	SMu	Würth Elektronik eiSos GmbH & Co. KG		Bead				
5.2	2012-09-26	SSt	SMu	EMC & Inductive Solutions Max-Evth-Str. 1		Boud				
5.1	2012-06-26	SSt	SSt	74638 Waldenburg		Order No.	COMPLIANT			
5.0	2012-03-29	SSt	SMu	Germany Tel. +49 (0) 79 42 945 - 0		740700040	ROHS&REACH			
4.0	2005-12-16	SSt	-	www.we-online.com eiSos@we-online.com		742792642	I I I I I I I I I I I I I I I I I I I	A4		
REV	DATE	BY	CHECKED	eloos@we-offilite.com		Size: 0603				

G Packaging Specification: [mm]

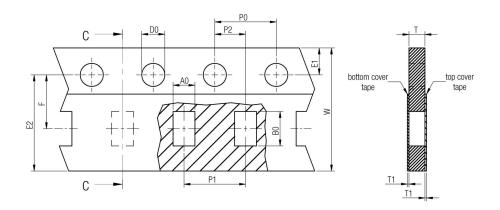


			A0	В0	w	P1	Т	T1	D0	E1	E2	F	P0	P2	Таре	Packaging Unit
		tolerance	typ.	typ.	+0,3 -0,1	± 0,1	max.	max.	+0,1 -0,0	± 0,1	min.	± 0,05	± 0,1	± 0,05		
Г	a	0402	0,69	1,19	8,00	2,00	0,66	0,10	1,50	1,75	6,25	3,50	4,00	2,00	Paper	10000
Ι.	Size	0603	1,10	1,88	8,00	4,00	1,10	0,10	1,50	1,75	6,25	3,50	4,00	2,00	Paper	4000
	" [0805	1,42	2,24	8,00	4,00	1,04	0,10	1,50	1,75	6,25	3,50	4,00	2,00	Paper	4000

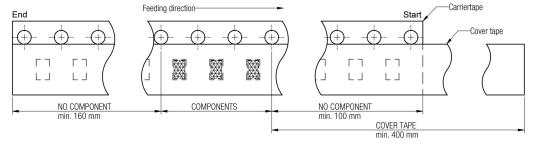



Packaging is referred to the international standard IEC 60286 -3:2007












DESCRIPTION

165° - 180°					
	5.4	2012-11-28	SSt	SSt	WE-CBF SMD EMI Suppression Ferrite
	5.3	2012-10-23	SSt	SMu	Würth Elektronik eiSos GmbH & Co. KG Bead
	5.2	2012-09-26	SSt	SMu	EMC & Inductive Solutions Max-Evth-Str. 1
	5.1	2012-06-26	SSt	SSt	74638 Waldenburg Order No.
	5.0	2012-03-29	SSt	SMu	Germany Tel. 40 (0) 70 40 045 0
Pull-of force Tape width 8 mm 0,1 N - 1,0 N	1 10	2005-12-16	SSt	-	101. +43 (0) 73 42 943 - 0 www.we-online.com elsos@we-online.com A4
14pc Matri 0 mm 0,1 14 1,0 14	REV	DATE	BY	CHECKED	Size: 0603

H Soldering Specifications:



H1: Classification Reflow Profile for SMT components:

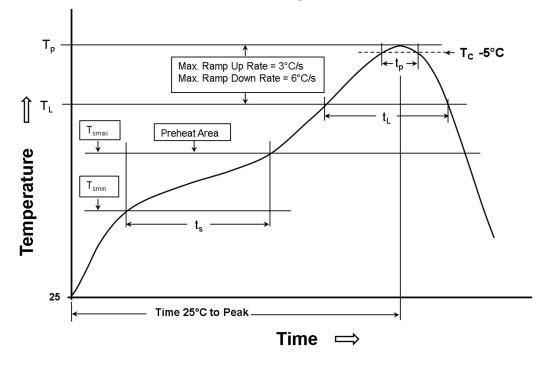

H2: Classification Reflow Profiles

Profile Feature	Pb-Free Assembly				
Preheat - Temperature Min (T _{smin}) - Temperature Max (T _{smax}) - Time (t _s) from (T _{smin} to T _{smax})	150°C 200°C 60-180 seconds				
Ramp-up rate (T _L to T _P)	3°C/ second max.				
Liquidous temperature (T _L) Time (t _L) maintained above T _L	217°C 60-150 seconds				
Peak package body temperature (Tp)	See Table H3				
Time within 5°C of actual peak temperature (tp)	20-30 seconds				
Ramp-down rate (T _P to T _L)	6°C/ second max.				
Time 25°C to peak temperature	8 minutes max.				

refer to IPC/JEDEC J-STD-020D

H3: Package Classification Reflow Temperature

	Package Thickness	Volume mm³ <350	Volume mm³ 350 - 2000	Volume mm³ >2000
PB-Free Assembly	< 1.6 mm	260°C	260°C	260°C
PB-Free Assembly	1.6 - 2.5 mm	260°C	250°C	245°C
PB-Free Assembly	≥ 2.5 mm	250°C	245°C	245°C

refer to IPC/JEDEC J-STD-020D

				Projection !		DESCRIPTION				
5.4	2012-11-28	SSt	SSt			WE-CBF SMD E	MI Suppression Ferrito	e		
5.3	2012-10-23	SSt	SMu	Würth Elektronik eiSos GmbH & Co. KG		Bead				
5.2	2012-09-26	SSt	SMu	EMC & Inductive Solutions Max-Eyth-Str. 1		Dead				
5.1	2012-06-26	SSt	SSt	74638 Waldenburg		Order No.	COMPLIANT			
5.0	2012-03-29	SSt	SMu	Germany Tel. +49 (0) 79 42 945 - 0		ROHS&REAC		SIZE		
4.0	2005-12-16	SSt	-	www.we-online.com eiSos@we-online.com		742792642 WÜRTH ELEKTRONIK				
REV	DATE	BY	CHECKED	- CIOUS WE-UTILITE.CUTT		Size: 0603				

I Cautions and Warnings:

The following conditions apply to all goods within the product series of WE-CBF of Würth Elektronik eiSos GmbH & Co. KG:

General:

All recommendations according to the general technical specifications of the data-sheet have to be complied with.

The disposal and operation of the product within ambient conditions which probably alloy or harm the component surface has to be avoided.

If the product is potted in customer applications, the potting material might shrink during and after hardening. Accordingly to this the product is exposed to the pressure of the potting material with the effect that the ferrite body and termination is possibly damaged by this pressure and so the electrical as well as the mechanical characteristics are endanger to be affected. After the potting material is cured, the ferrite body and termination of the product have to be checked if any reduced electrical or mechanical functions or destructions have occurred.

The responsibility for the applicability of customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products do also apply for customer specific products.

Cleaning agents that are used to clean the application might damage or change the characteristics of the component, body, pins or termination

Direct mechanical impact to the product shall be prevented as the ferrite material of the ferrite body could flake or in the worst case it could break

Product specific:

Follow all instructions mentioned in the datasheet, especially:

- The solder profile has to be complied with according to the technical reflow soldering specification, otherwise no warranty will be sustained.
- · Wave soldering is only allowed after evaluation and approval.
- •All products are supposed to be used before the end of the period of 12 months based on the product date-code, if not a 100% solderability can't be warranted.
- Violation of the technical product specifications such as exceeding the nominal rated current will result in the loss of warranty.



				Projection		DESCRIPTION					
											
5.4	2012-11-28	SSt	SSt			WE-CBF SMD E	MI Suppression Ferrite	e			
5.3	2012-10-23	SSt	SMu	Würth Elektronik eiSos GmbH & Co. KG		Bead					
5.2	2012-09-26	SSt	SMu	EMC & Inductive Solutions Max-Evth-Str. 1		Dead					
5.1	2012-06-26	SSt	SSt	74638 Waldenburg		Order No.	COMPLIANT				
5.0	2012-03-29	SSt	SMu	Germany Tel. +49 (0) 79 42 945 - 0		- 40 - 00040	ROHS&REACH	OIZL			
4.0	2005-12-16	SSt	-	www.we-online.com eiSos@we-online.com		742792642 WÜRTH ELEKTRONIK					
REV	DATE	BY	CHECKED	eloos@we-offilite.com		Size: 0603					

J Important Notes:

The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications.

In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component.

Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.



6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered.

The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG.

Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

				Projection ,		DESCRIPTION					
5.4	2012-11-28	SSt	SSt	9		WE-CBF SMD EI	MI Suppression Ferrite	,			
5.3	2012-10-23	SSt	SMu	Würth Elektronik eiSos GmbH & Co. KG		Bead					
5.2	2012-09-26	SSt	SMu	EMC & Inductive Solutions Max-Eyth-Str. 1		Deau					
5.1	2012-06-26	SSt	SSt	74638 Waldenburg		Order No.	COMPLIANT				
5.0	2012-03-29	SSt	SMu	Germany Tel. +49 (0) 79 42 945 - 0		740700C40 ROHS&R		OIZL			
4.0	2005-12-16	SSt	-	www.we-online.com eiSos@we-online.com		742792642					
REV	DATE	BY	CHECKED	eloos@we-online.com		Size: 0603					



ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9