


PRECISION VOLTAGE COMPARATOR

■ GENERAL DESCRIPTION

The NJM311 is a voltage comparator that has low input currents. It is also designed to operate covering a wider range of supply voltages from Standard $\pm 15\text{V}$ op amp supplies down to the single 5V supply used for IC logic. Its output is compatible with RTL, DTL and TTL as well as MOS circuits. Further more, it can drive lamps or relays, switching voltages up to 40V at currents as high as 50mA. Offset balancing is provided, and the outputs can be OR wired.

■ PACKAGE OUTLINE



NJM311D




NJM311M

■ FEATURES

- Operating Voltage (+5V ~ +36V)
- Single Supply Operation
- Single Circuit
- With V_{IO} Trim Terminal
- Response Time (200ns typ.)
- Package Outline DIP8, DMP8
- Bipolar Technology


■ PIN CONFIGURATION

NJM311D
NJM311M

PIN FUNCTION

1. GND
2. +INPUT
3. -INPUT
4. V^-
5. BAL
6. BAL/STROBE
7. OUTPUT
8. V^+

■ EQUIVALENT CIRCUIT

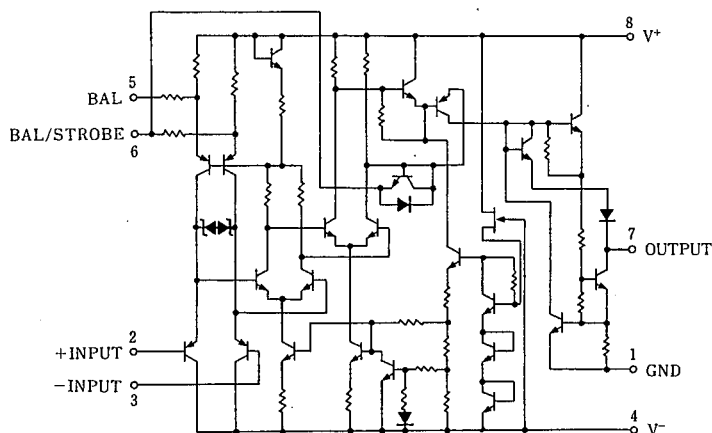

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺ /V ⁻	36(±18)	V
Output to Negative Supply Voltage	V ₇₋₄	40	V
Ground to Negative Supply Voltage	V ₁₋₄	30	V
Differential Input Voltage	V _{ID}	±30	V
Input Voltage	V _{IN}	±15 (note 1)	V
Power Dissipation	P _D	(DIP8) 500 (DMP8) 300	mW
Operating Temperature Range	T _{opr}	-40 ~ +85	°C
Storage Temperature Range	T _{stg}	-40 ~ +125	°C







(note) For supply voltage less than ±15V, the absolute input voltage is equal to the supply voltage.

■ ELECTRICAL CHARACTERISTICS

(V⁺/V⁻=±15V, Ta=25°C)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V _{IO}	R _S ≤ 50kΩ	—	2.0	7.5	mV
Input Offset Current	I _{IO}		—	6.0	50	nA
Input Bias Current	I _B		—	100	250	nA
Voltage Gain	A _V		—	106	—	dB
Response Time	t _R		—	200	—	ns
Saturation Voltage	V _{SAT}	V _{IN} ≤ -10mV, I _O = 50mA	—	0.75	1.5	V
Stroke ON Current	I _{STR}		—	3.0	—	mA
Output Leakage Current	I _{LEAK}	V _{IN} ≥ 10mV, V _O = 35V	—	0.2	50	nA
Input Common Mode Voltage Range	V _{ICM}		—	±14	—	V
Positive Quiescent Current	I ⁺		—	5.1	7.5	mA
Negative Quiescent Current	I ⁻		—	4.1	5.0	mA

■ TYPICAL CHARACTERISTICS

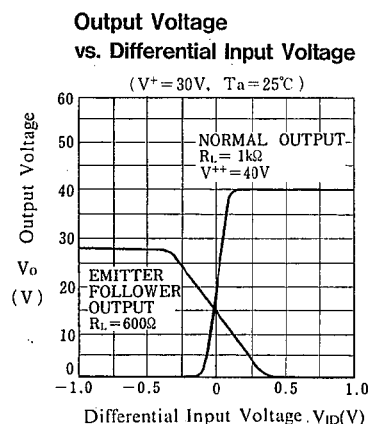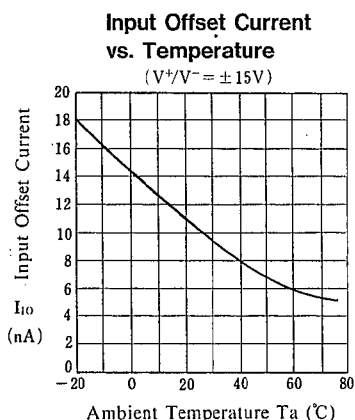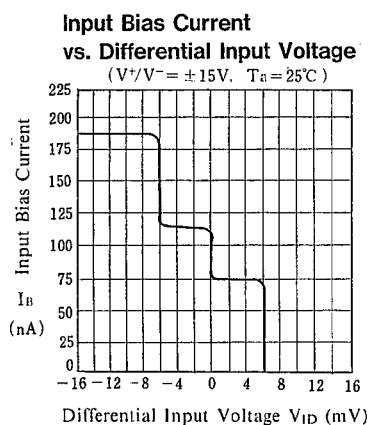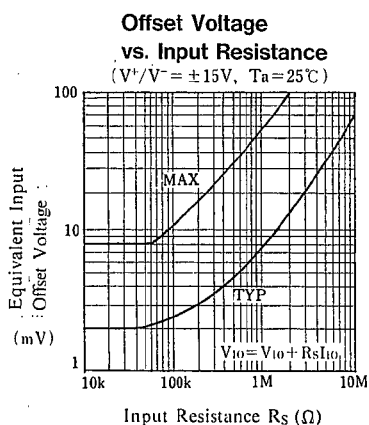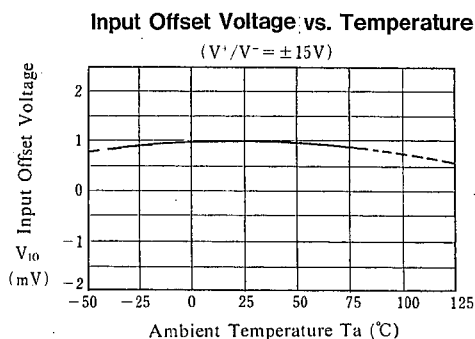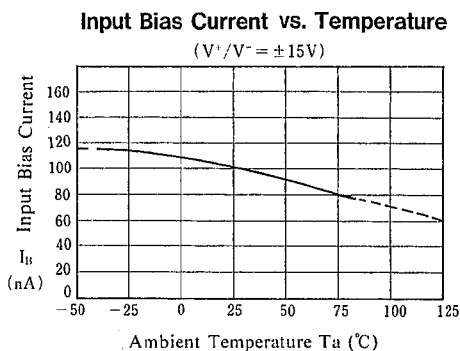


■ TYPICAL CHARACTERISTICS


Saturation Voltage vs. Output Current

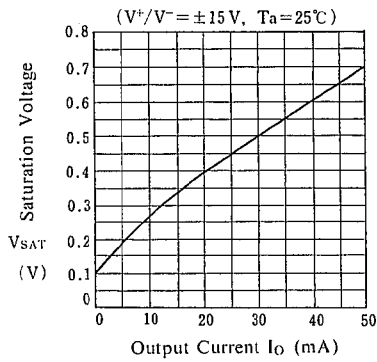

Quiescent Current vs. Operating Voltage

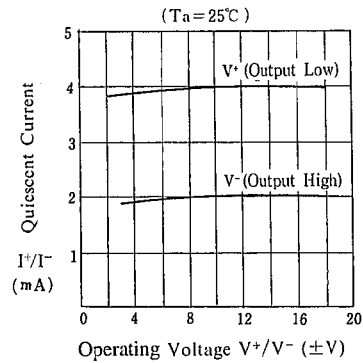


leakage Current vs. Temperature

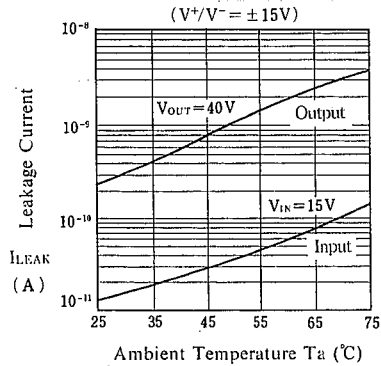


TYPICAL APPLICATIONS


Offset Null Circuit




Strobing




Increasing Input Stage Current

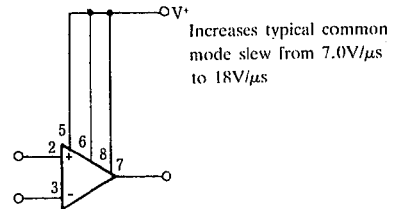


Positive Peak Detector

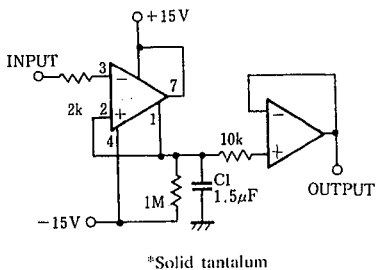


Negative Peak Detector




Zero Crossing Detector driving MOS Logic

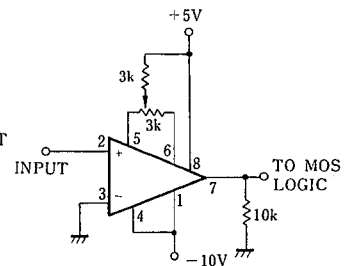


Digital Transmission Isolator

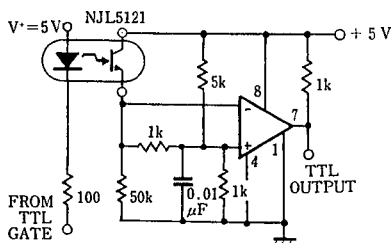

Precision Photodiode Comparator



Relay Driver with Strobe

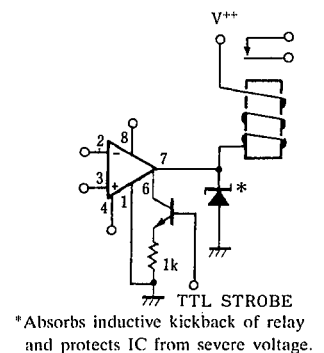

MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9