
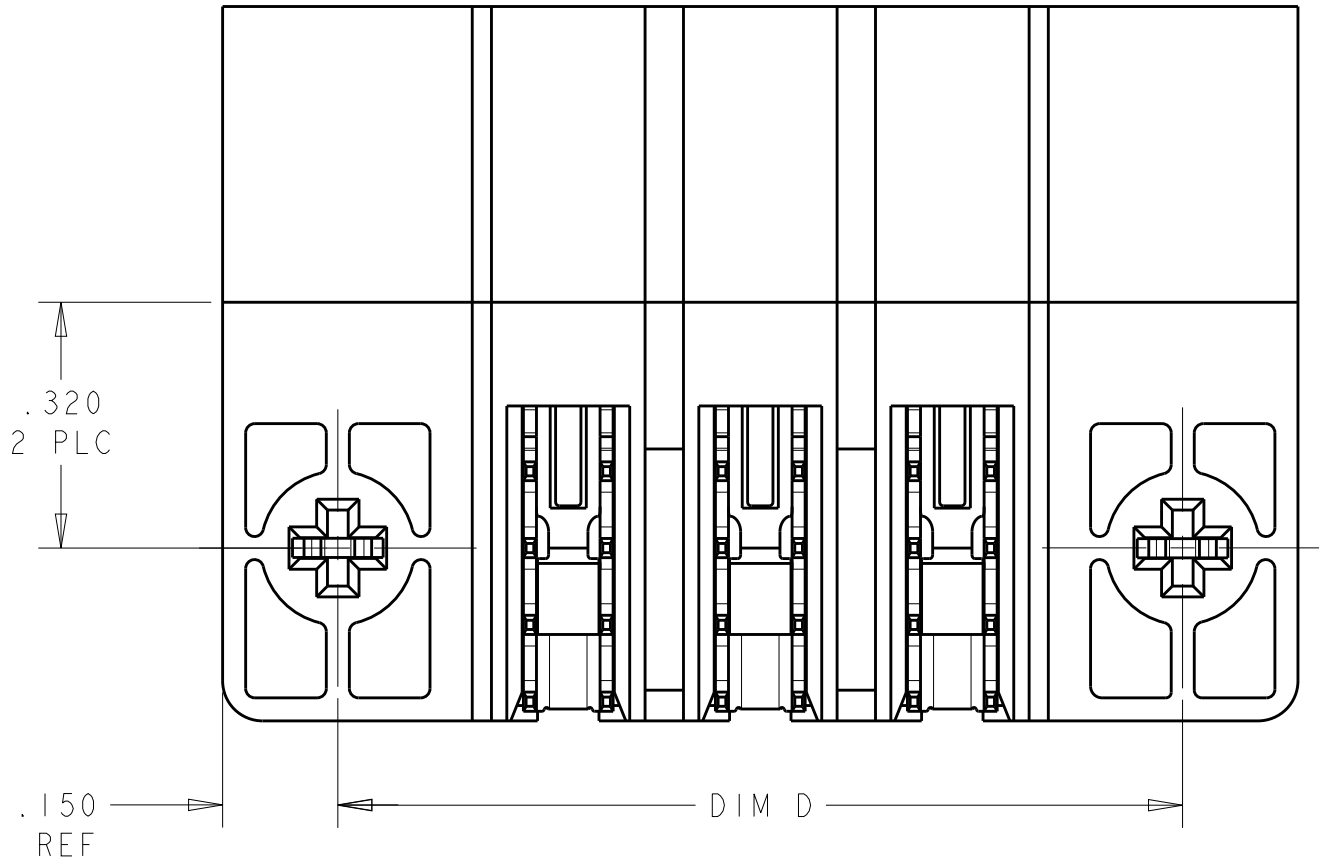
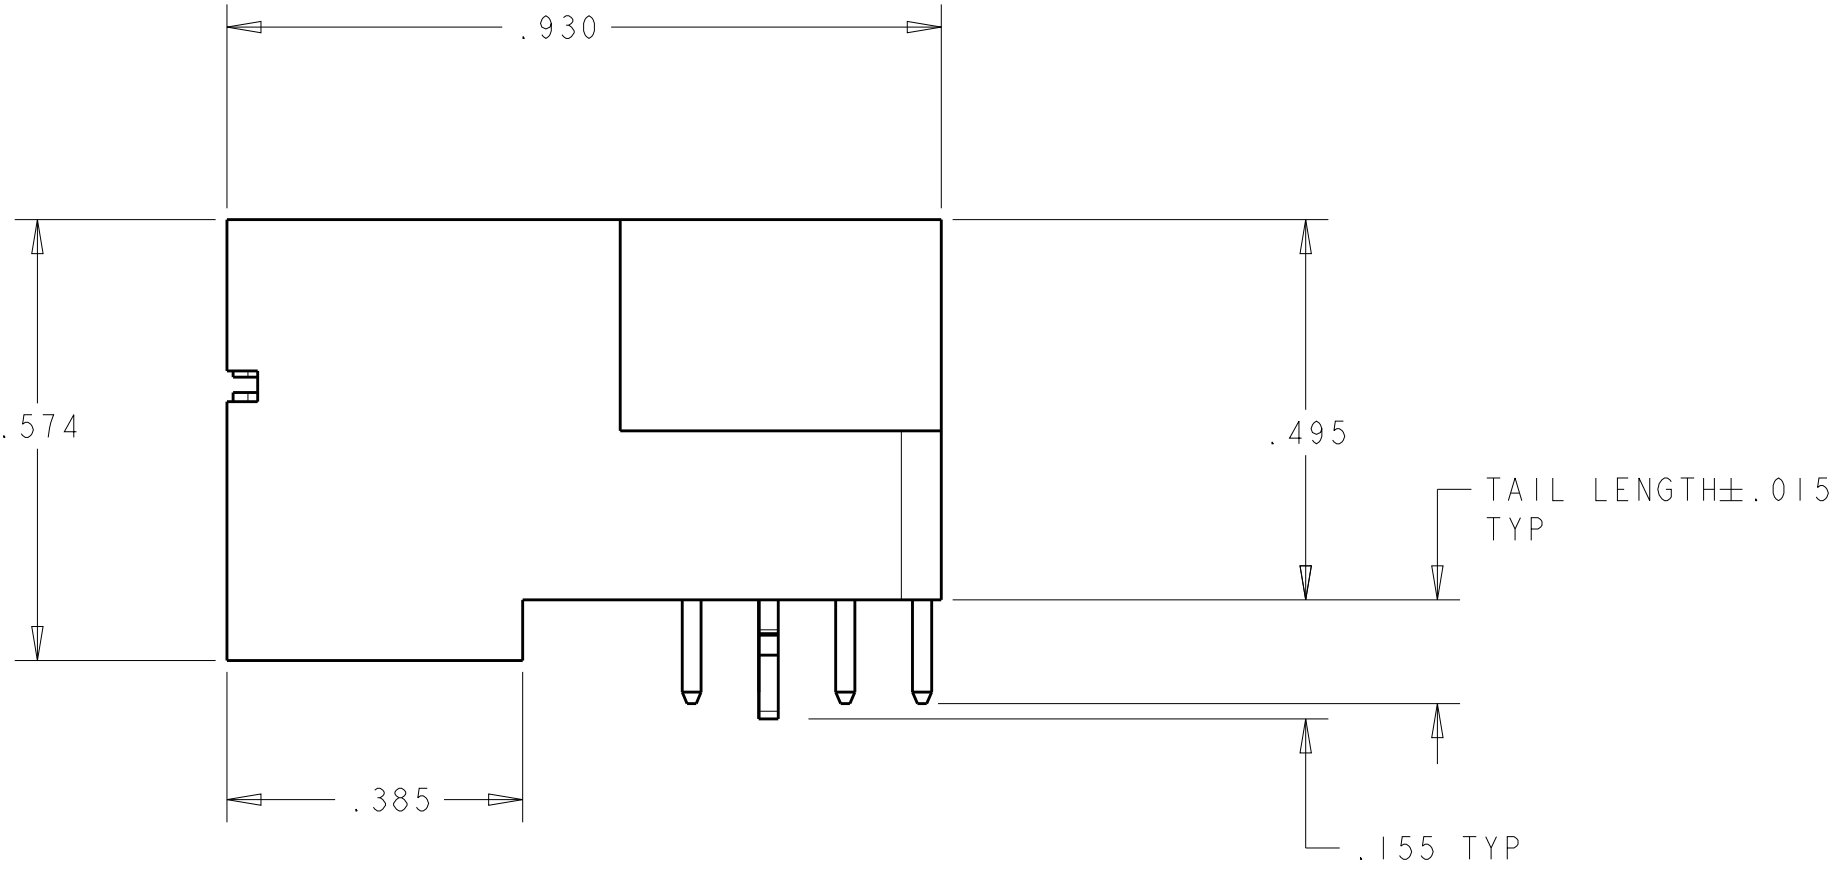
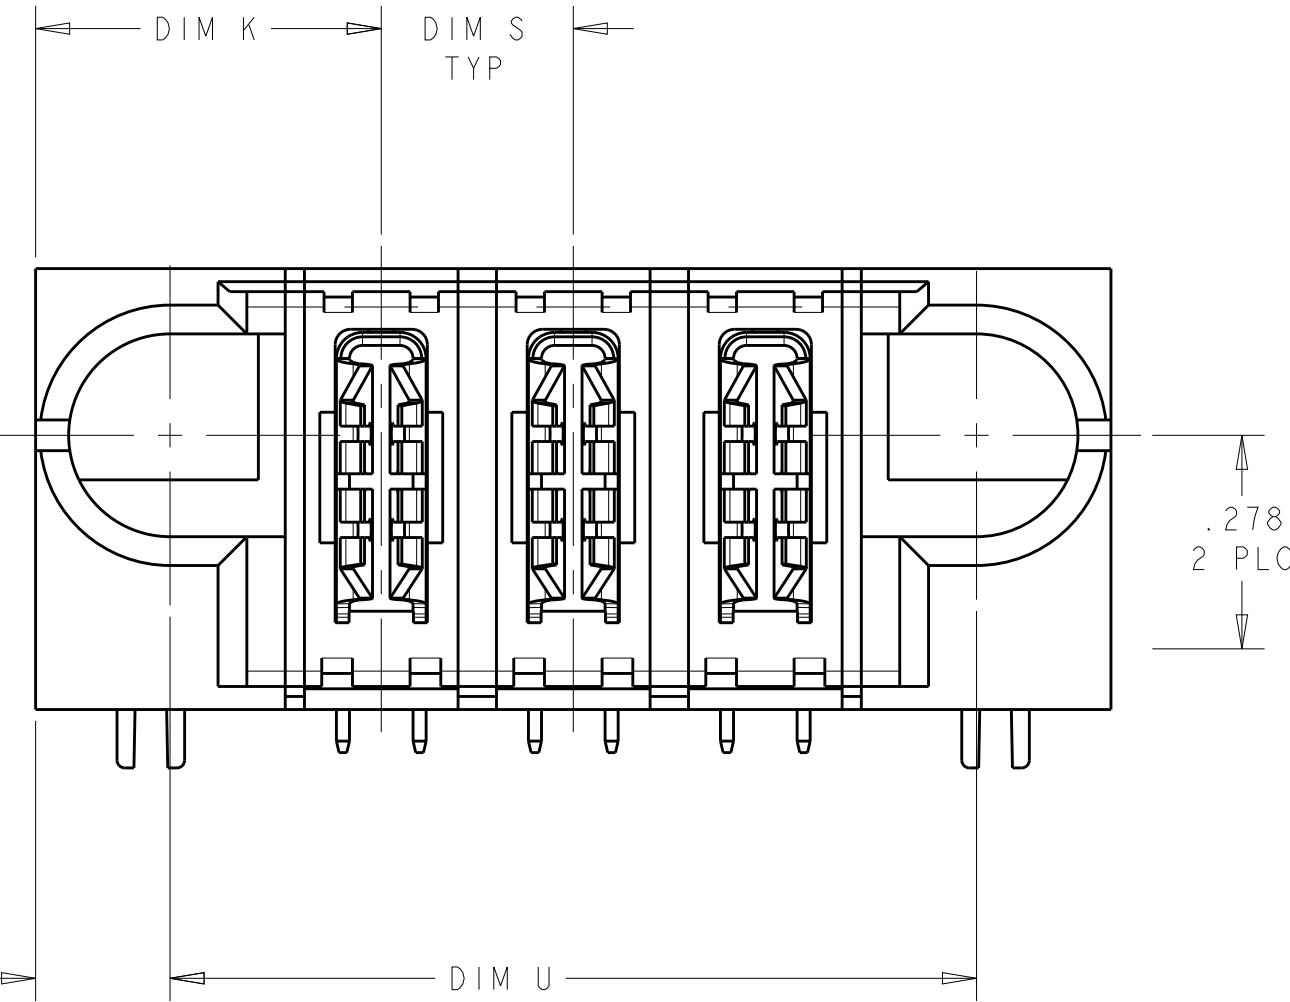


LOC		DIST		REVISIONS				
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		C1		REV PER ECR-11-022334	03NOV2011	CZ	SZ	
		C3		REVISED 1-8	16JAN2014	CZ	SZ	
		C5		ADDING NOTE FOR 1-8	10SEP2015	CZ	SZ	
		C6		REVISED 1-0 BY CUSTOMER	05MAY2016	CZ	SZ	

- 1 "AMP", PART NUMBER, AND DATE CODE TO BE MARKED IN AREA SHOWN.
- 2 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF POWER AND SIGNAL CONTACTS
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE.
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6 PCB- ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7 PCB - .0453±.0010 DRILLED HOLES WITH .0003 MIN Sn OVER
.001 TO .003 Cu PLATING TO ACHIEVE A .040±.003 DIA HOLE.
- 8 VARIABLE DIMENSIONS SHOWN ON VIEW (SHEET 3)
- 9 FOR DETAIL DIMENSION PLEASE REFER TO TABLE

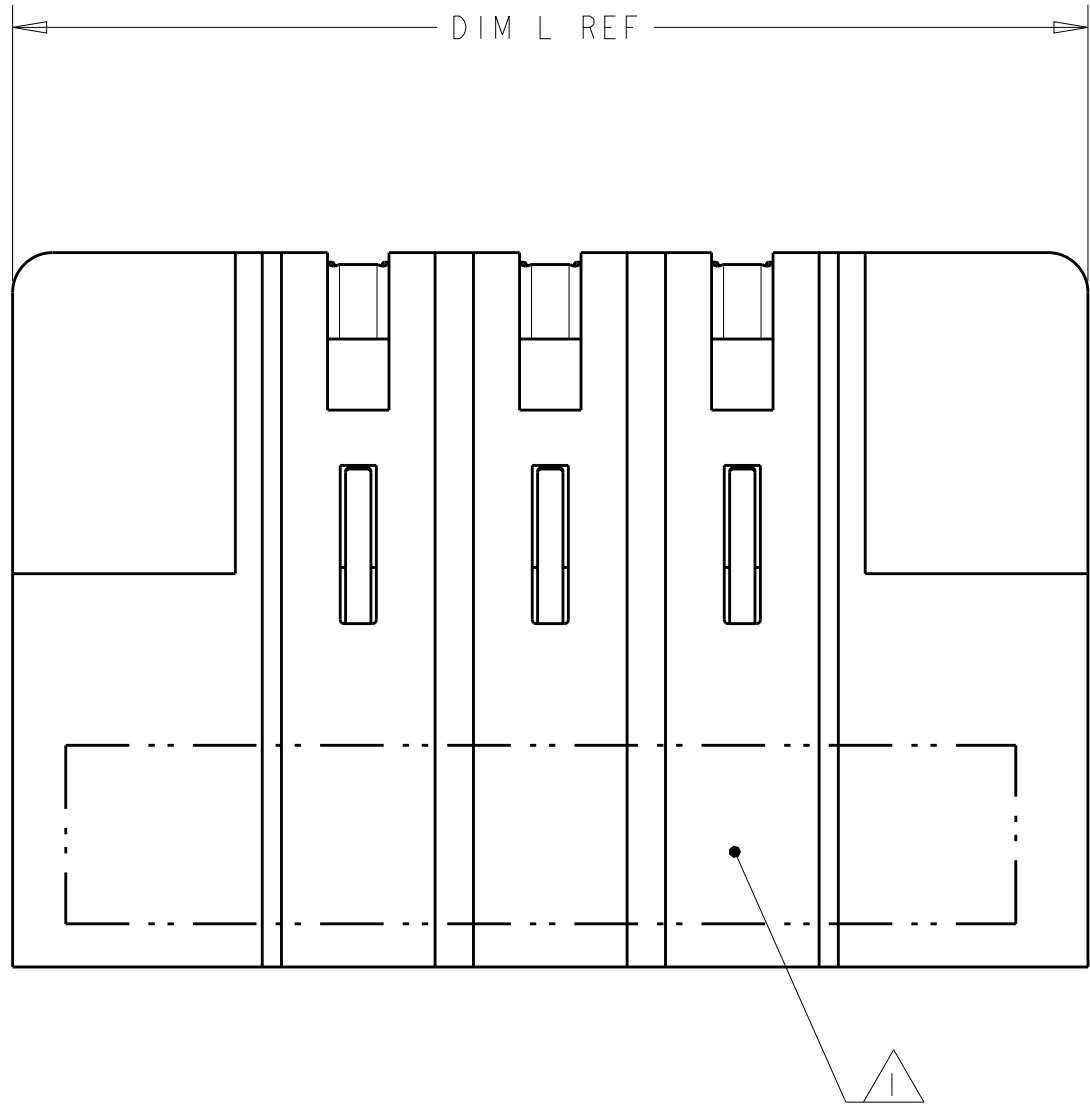

3.750	.200	3.800	.450	4.100	17P	1-6450123-8
1.150	.300	1.200	.450	1.500	3ACP	1-6450123-6
1.725	.375	1.775	.475	2.075	4P	1-6450123-5
2.700	.300	2.750	.475	3.050	8ACP	1-6450123-4
1.300	.200	1.350	.425	1.650	5HDP	1-6450123-2
5.550	.200	5.600	.450	5.900	26P	1-6450123-1
1.750	.200	1.800	.450	2.100	7HDP	1-6450123-0
2.300	.250	2.350	.450	2.650	8P	6450123-8
1.700	8	1.750	.425	2.050	6P	6450123-7
1.550	.250	1.600	.450	1.900	5P	6450123-6
2.050	.250	2.100	.450	2.400	7P	6450123-5
.800	.250	.850	.450	1.150	2P	6450123-4
1.200	.300	1.250	.475	1.550	3ACP	6450123-3
1.300	.250	1.350	.450	1.650	4P	6450123-2
1.050	.250	1.100	.450	1.400	3P	6450123-1
DIM U	DIM S	DIM D	DIM K	DIM L	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL : 2

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

3

DWN R.GRZYBOWSKI
CHK M.PERCHEKKE
APVD M.PERCHEKKE

PRODUCT SPEC 108-1973
APPLICATION SPEC 114-13038
WEIGHT -

CUSTOMER DRAWING

10FEB05
10FEB05

NAME
RIGHT ANGLE HEADER ASSEMBLY W/GUIDES
MULTI-BEAM XL


SIZE CAGE CODE DRAWING NO
A100779C=6450123


RESTRICTED TO -


TE Connectivity

SCALE 4:1 SHEET 1 OF 8 REV C6


PART NUMBER	ROWS	POWER		
		P1	P2	P3
6450123-3	D C B A			
3ACP				

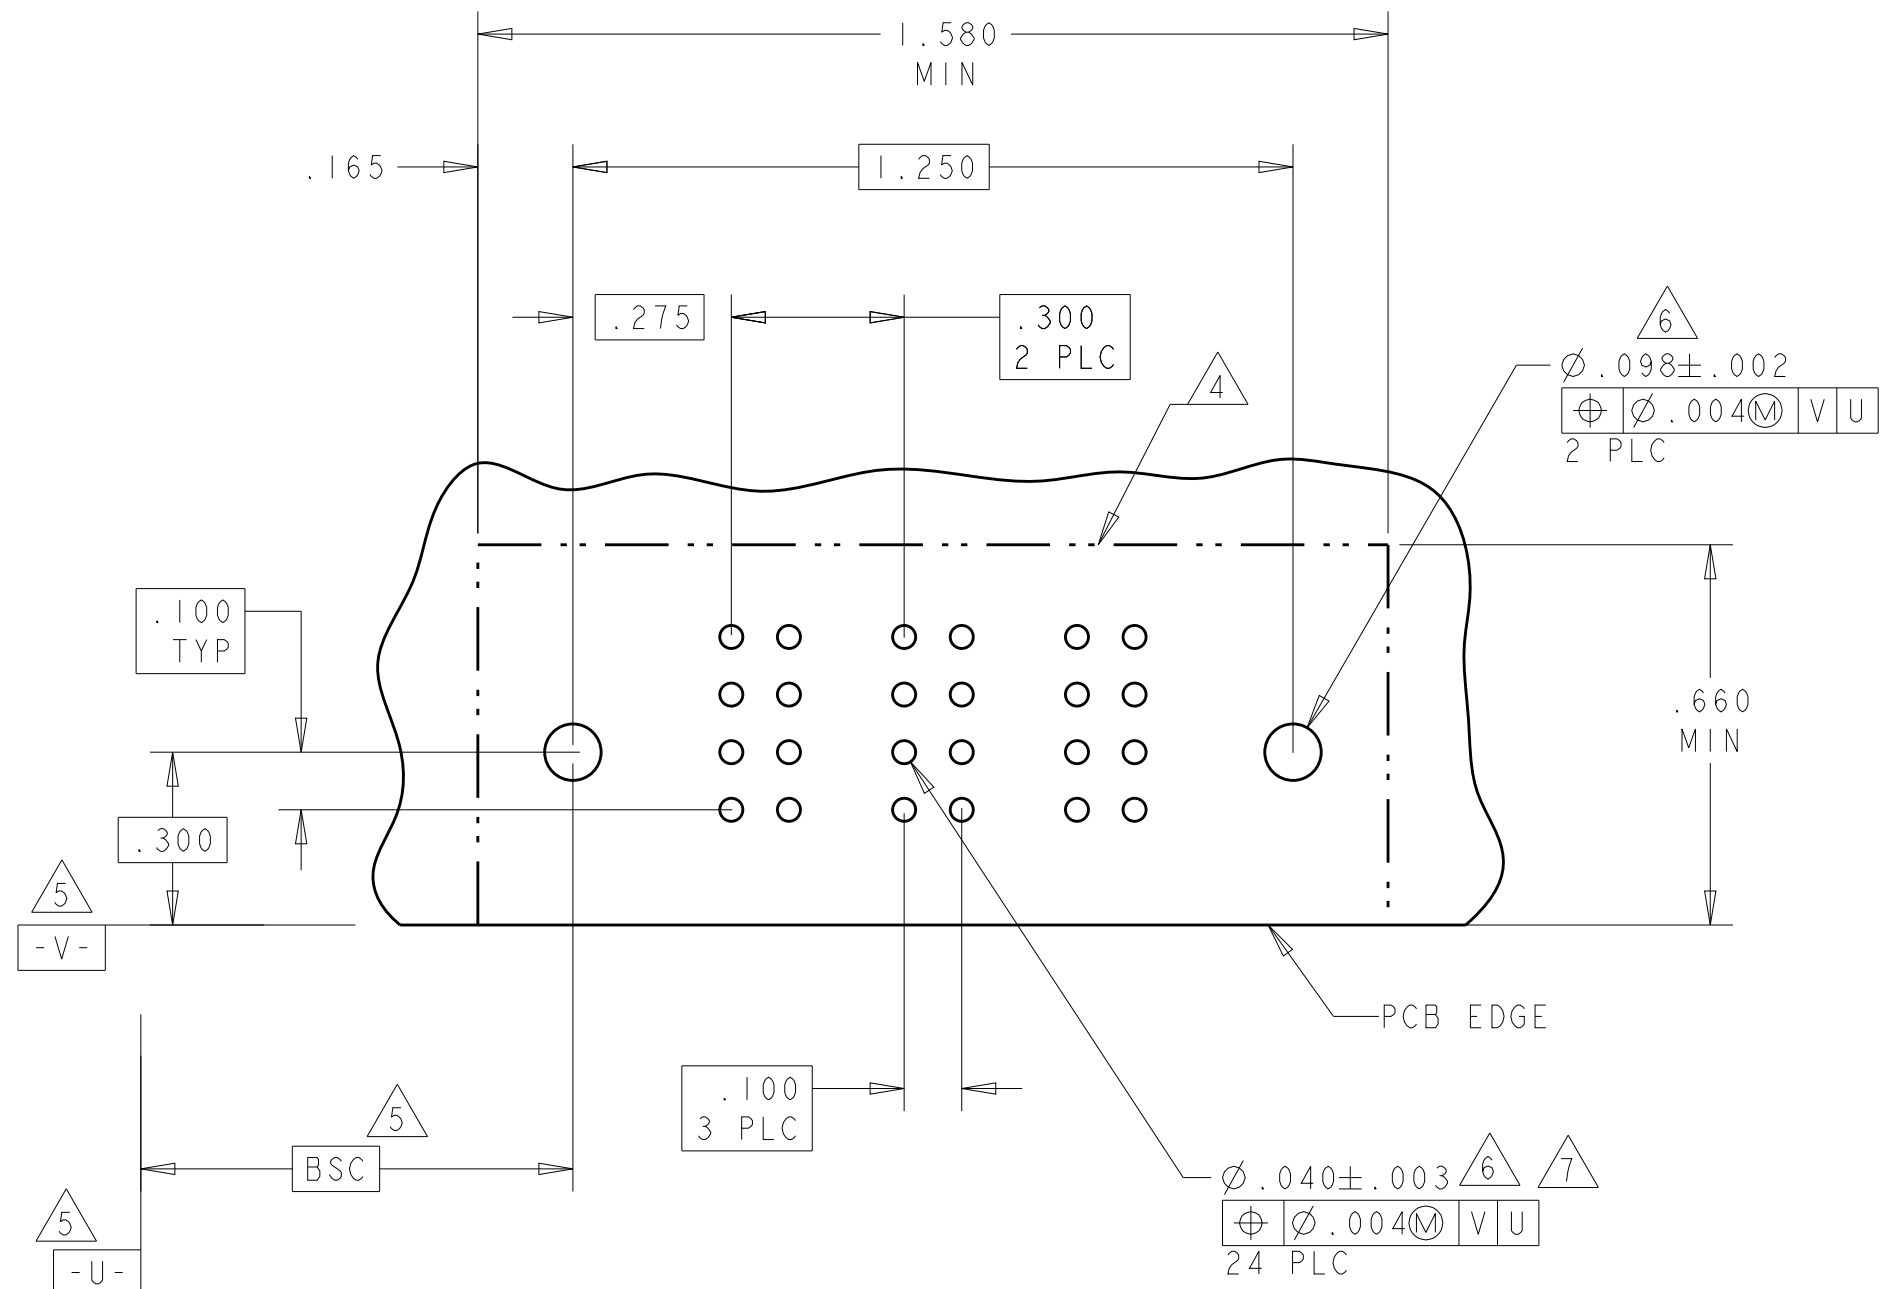

PART NUMBER	ROWS		POWER		
			P1	P2	
6450123-4	D C B A				
2P					

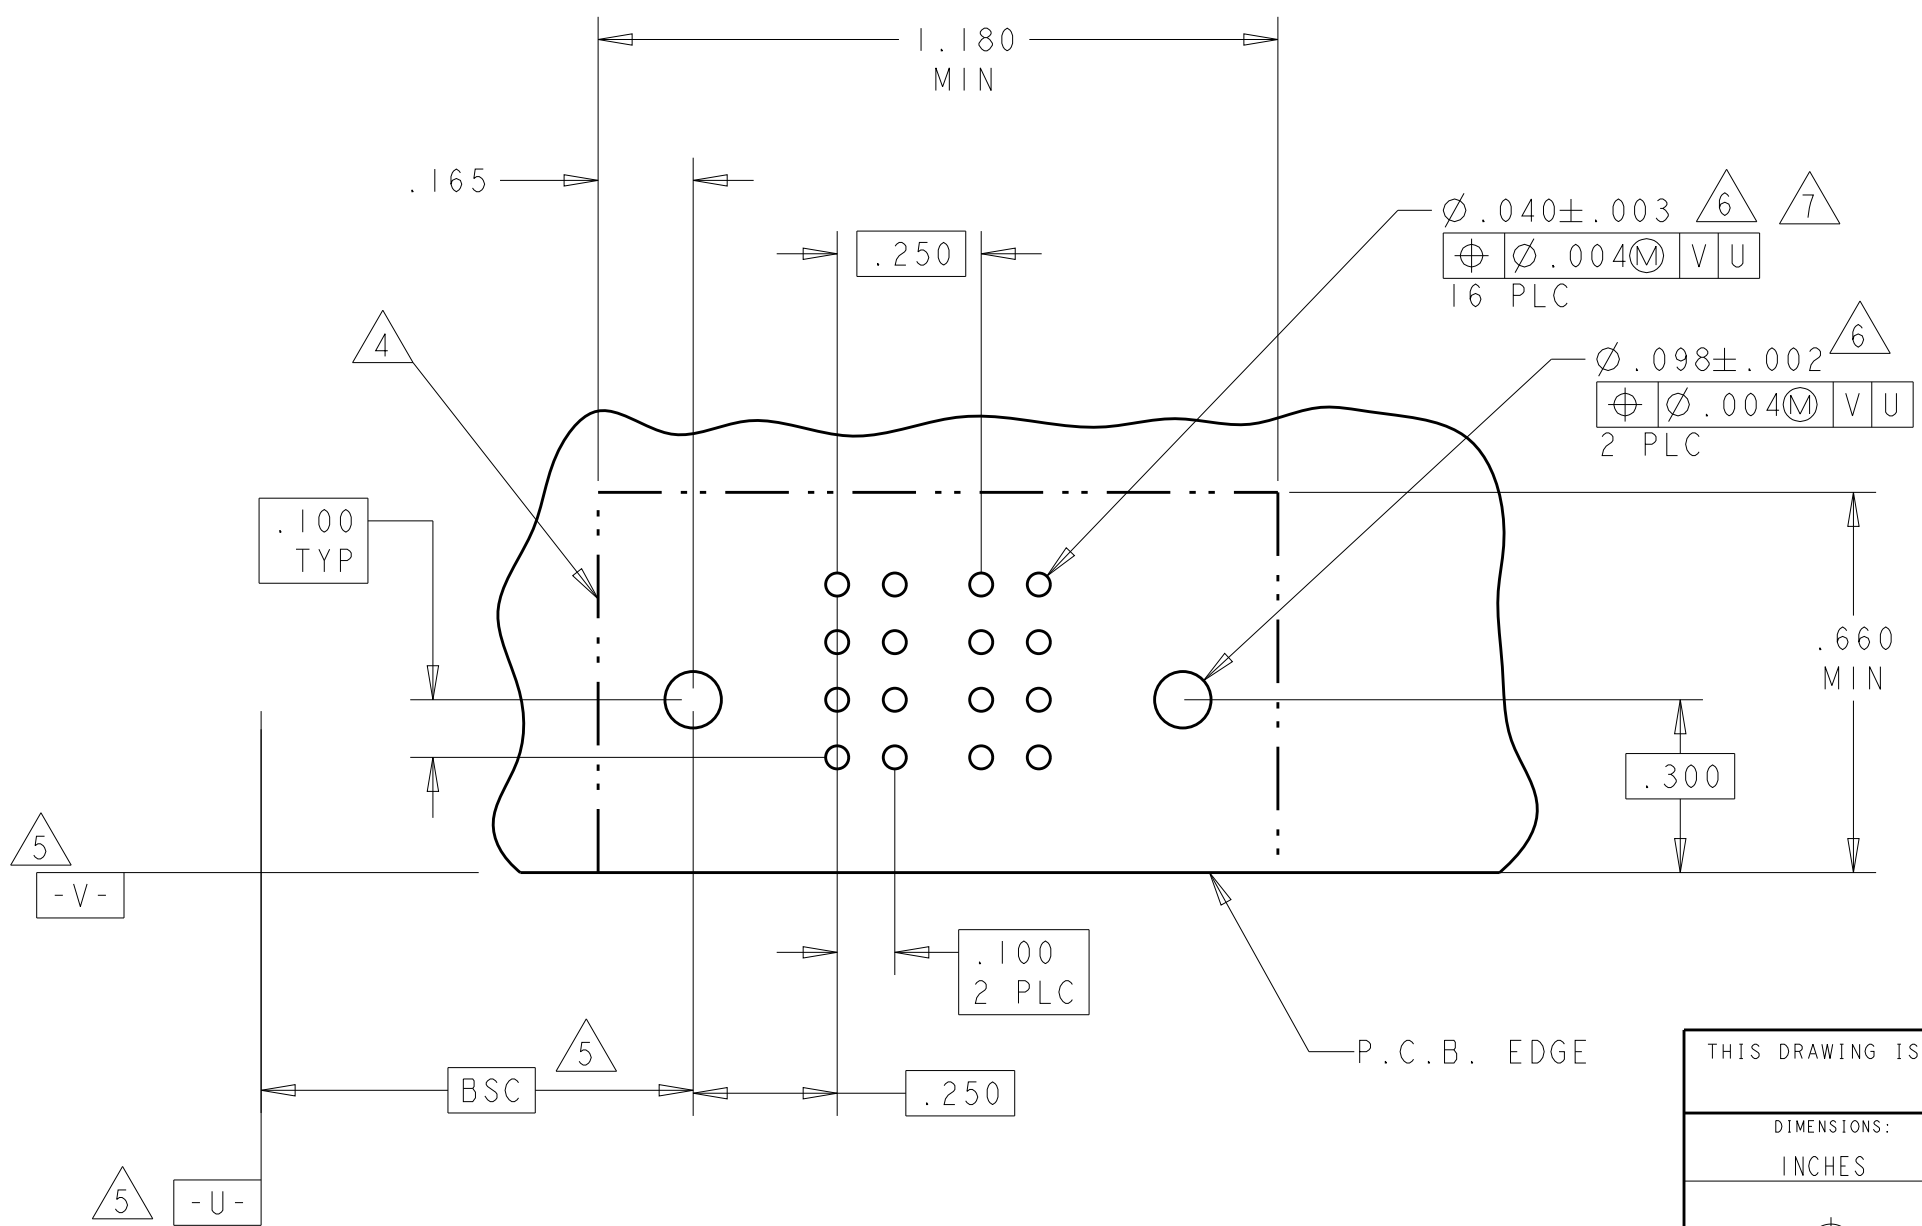


PA	.090
PM	.135
CODE	TAIL LENGTH
POWER CONTACT	


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 10FEB05		 TE Connectivity	
DIMENSIONS:		CHW M. PERCHERKE 10FEB05			
INCHES		APVD M. PERCHERKE - NAME		RIGHT ANGLE HEATER ASSEMBLY W/GUIDES	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		MULTI-BEAM XL	
		0 PLC ±.01		-	
		2 PLC ±.01		-	
		3 PLC ±.005		-	
4 PLC ±.002		108-1973		-	
ANGLES ±.7°		APPLICATION SPEC		-	
FINISH		114-13038		SIZE CAGE CODE DRAWING NO	
-		WEIGHT -		A 100779 © 6450123	
MATERIAL		CUSTOMER DRAWING		RESTRICTED TO	
-		SCALE 4:1		SHEET 2 of 8	
-		REV C6		-	

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER							
			P1	P2	P3	P4	P5	P6	P7	
6450123-5	D C B A	HD	PA	PA	PA	PA	PA	PA	PA	HD
7P										

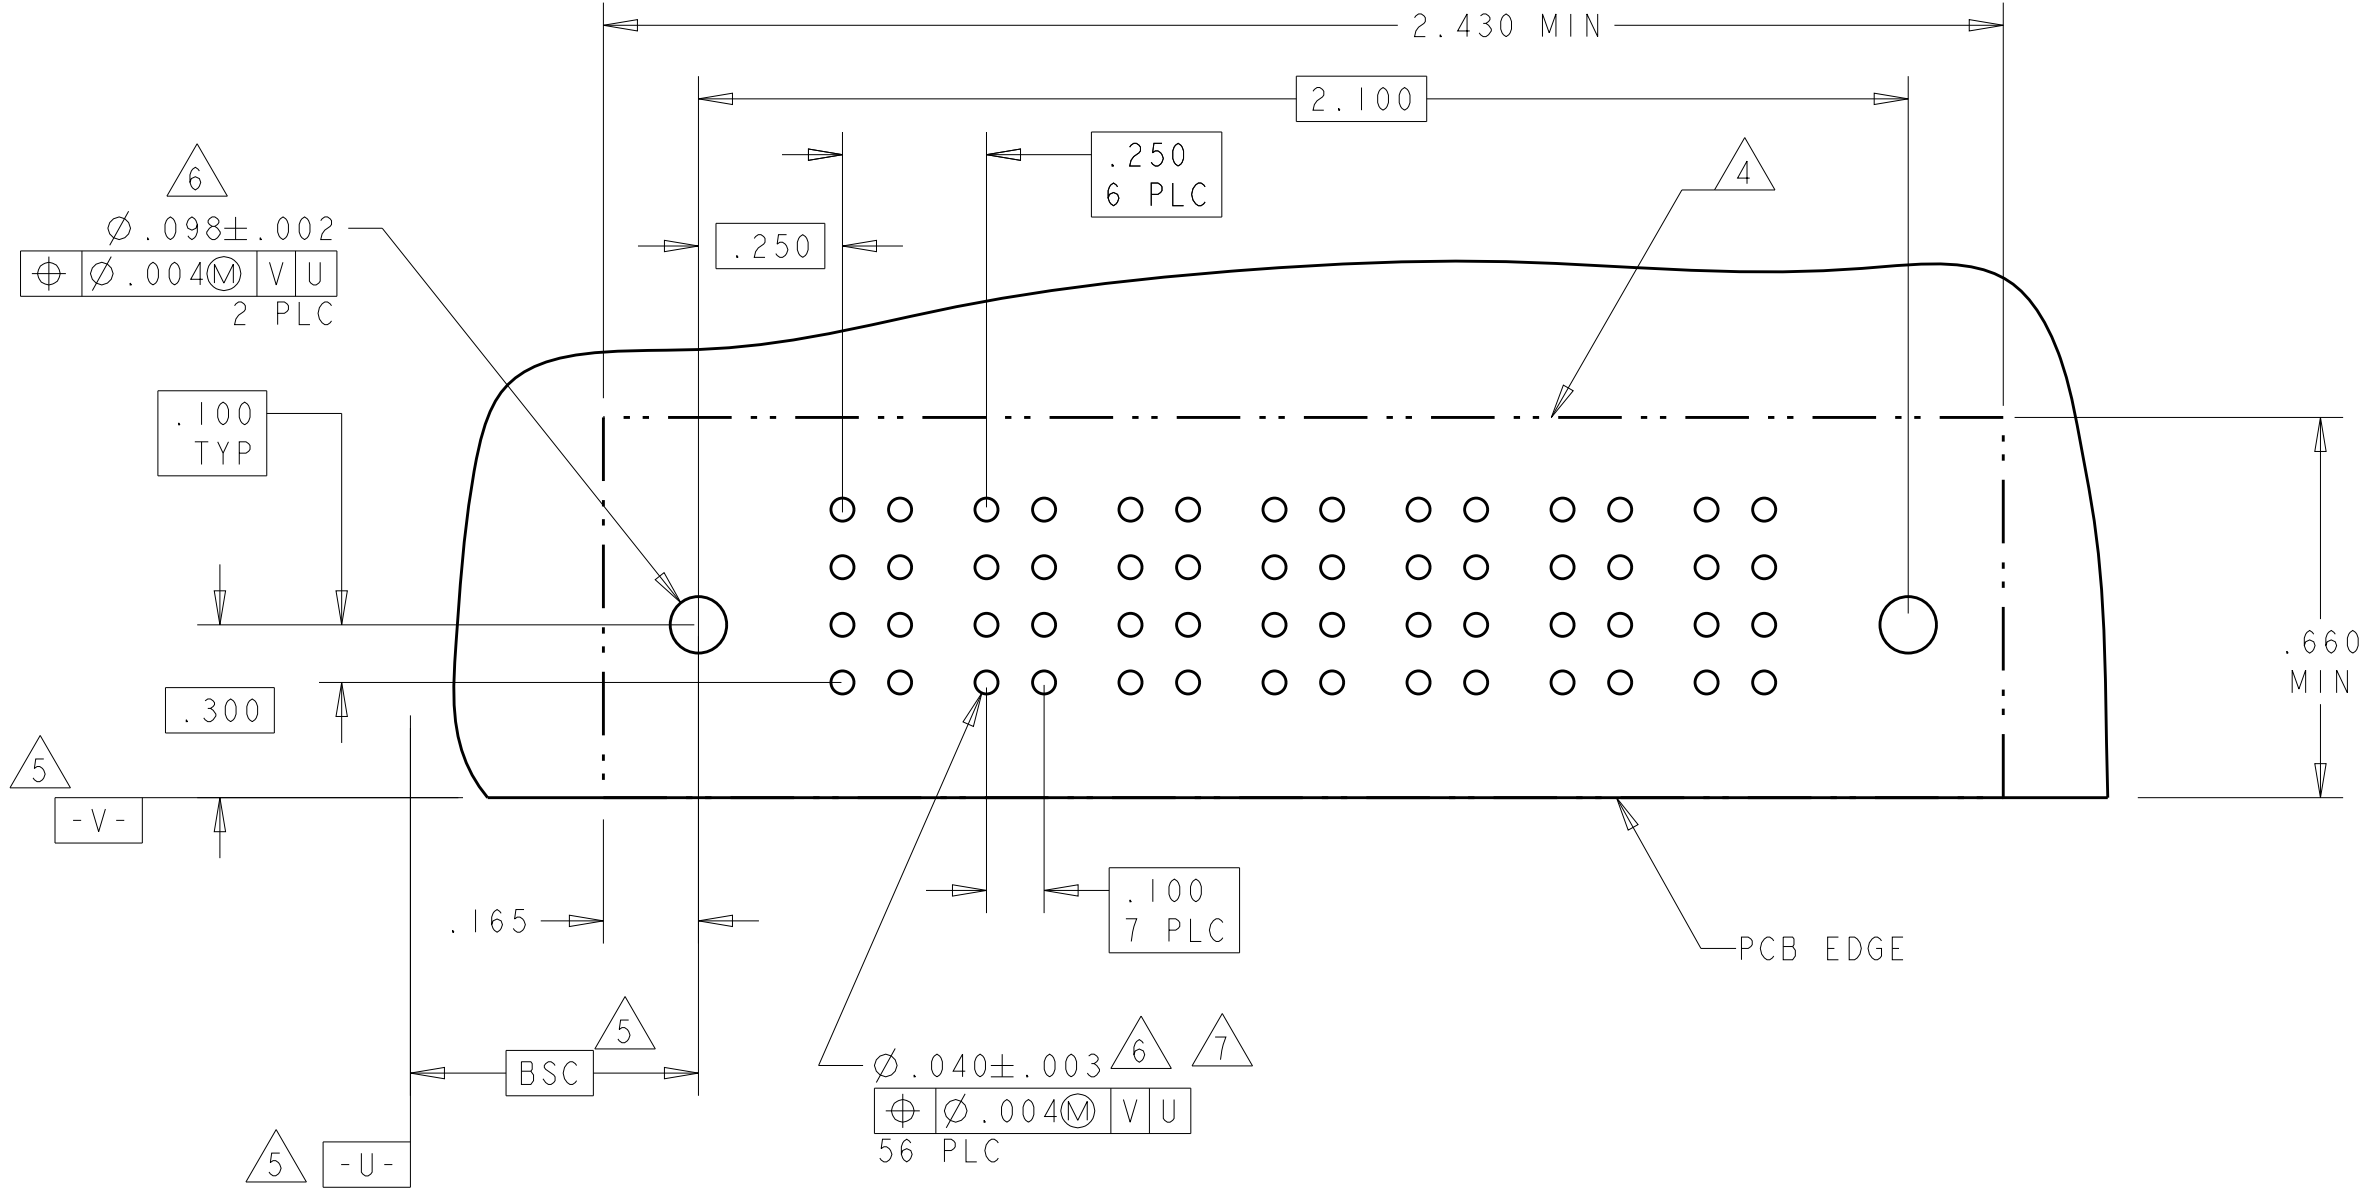


PART NUMBER	ROWS		POWER					
			P1	P2	P3	P4	P5	
6450123-6	D C B A	HD	PM	PM	PM	PM	PM	HD
5P								

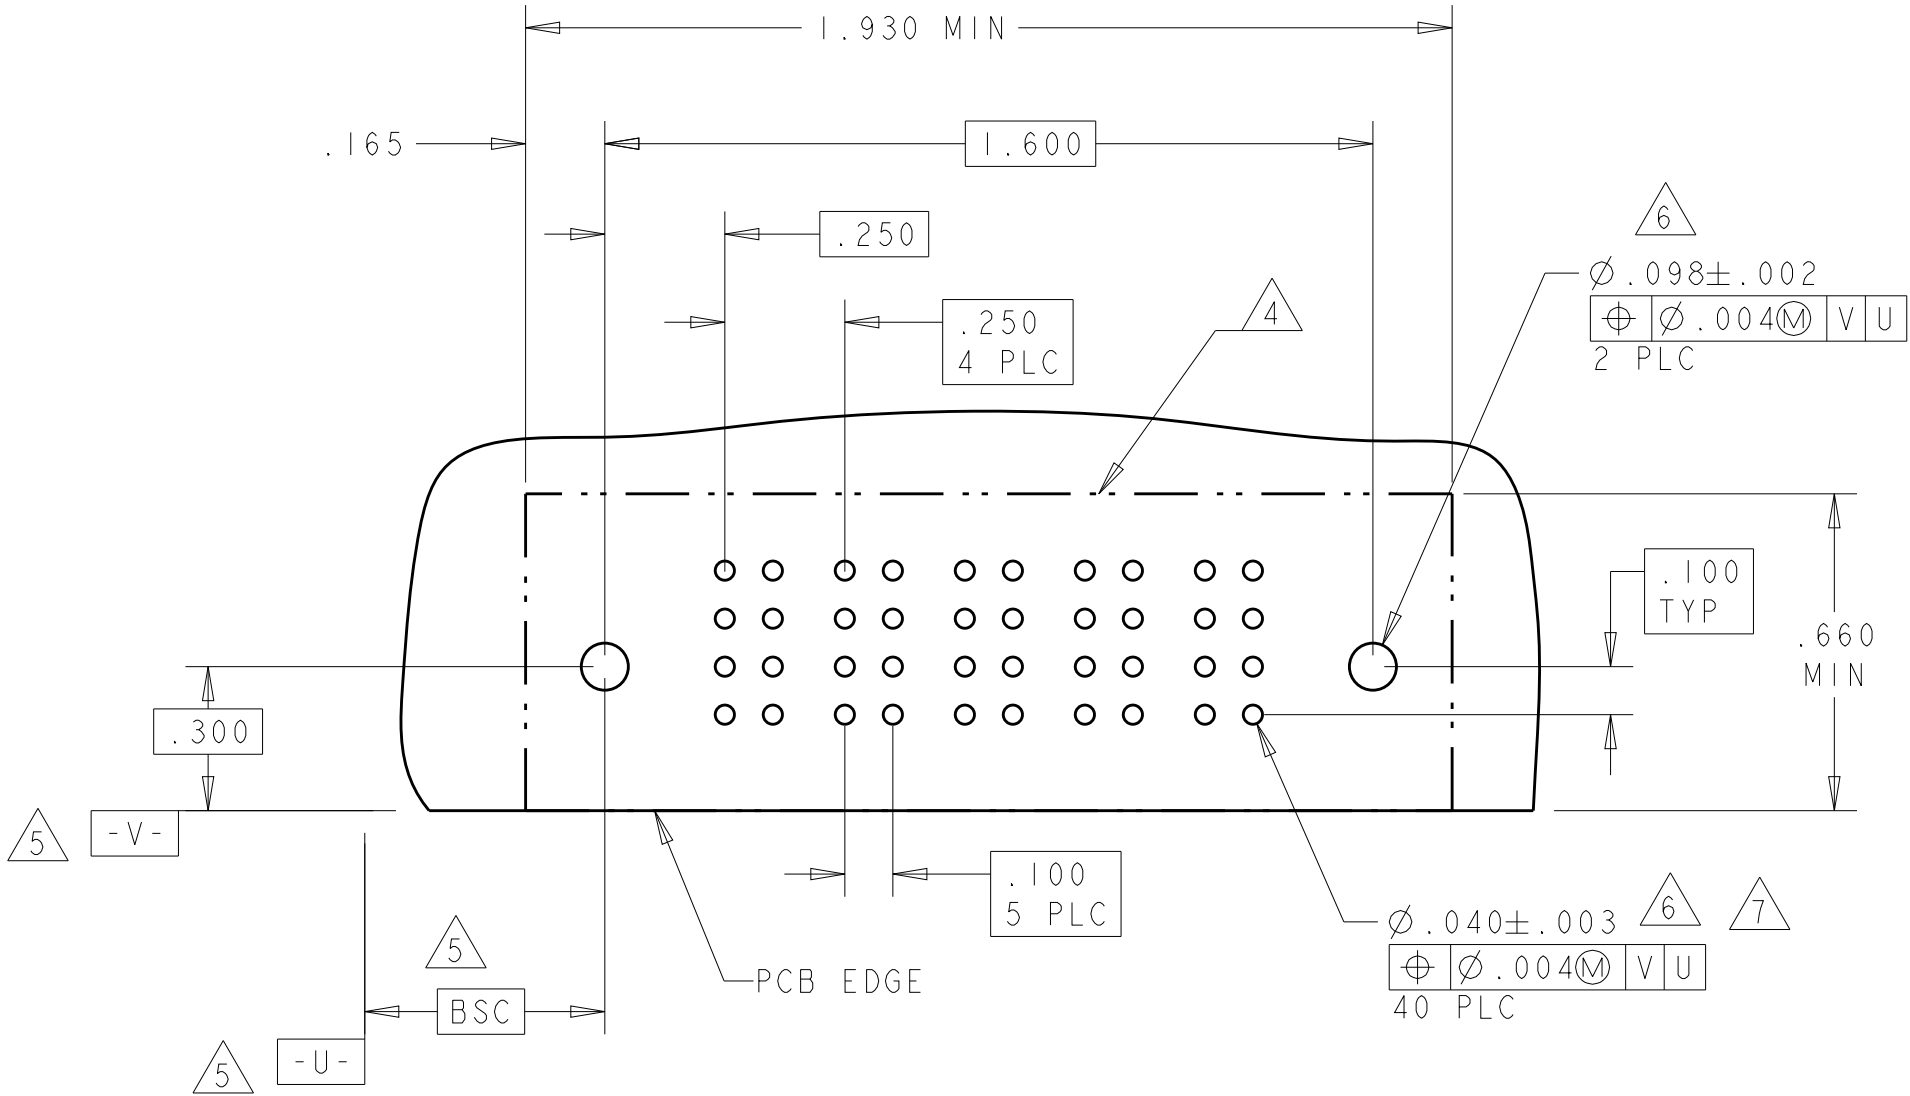


PART NUMBER	ROWS		POWER						
			P1	P2	P3	P4	P5	P6	
6450123-7	D C B A	HD	PM	PM	PM	PM	PM	PM	HD
6P									

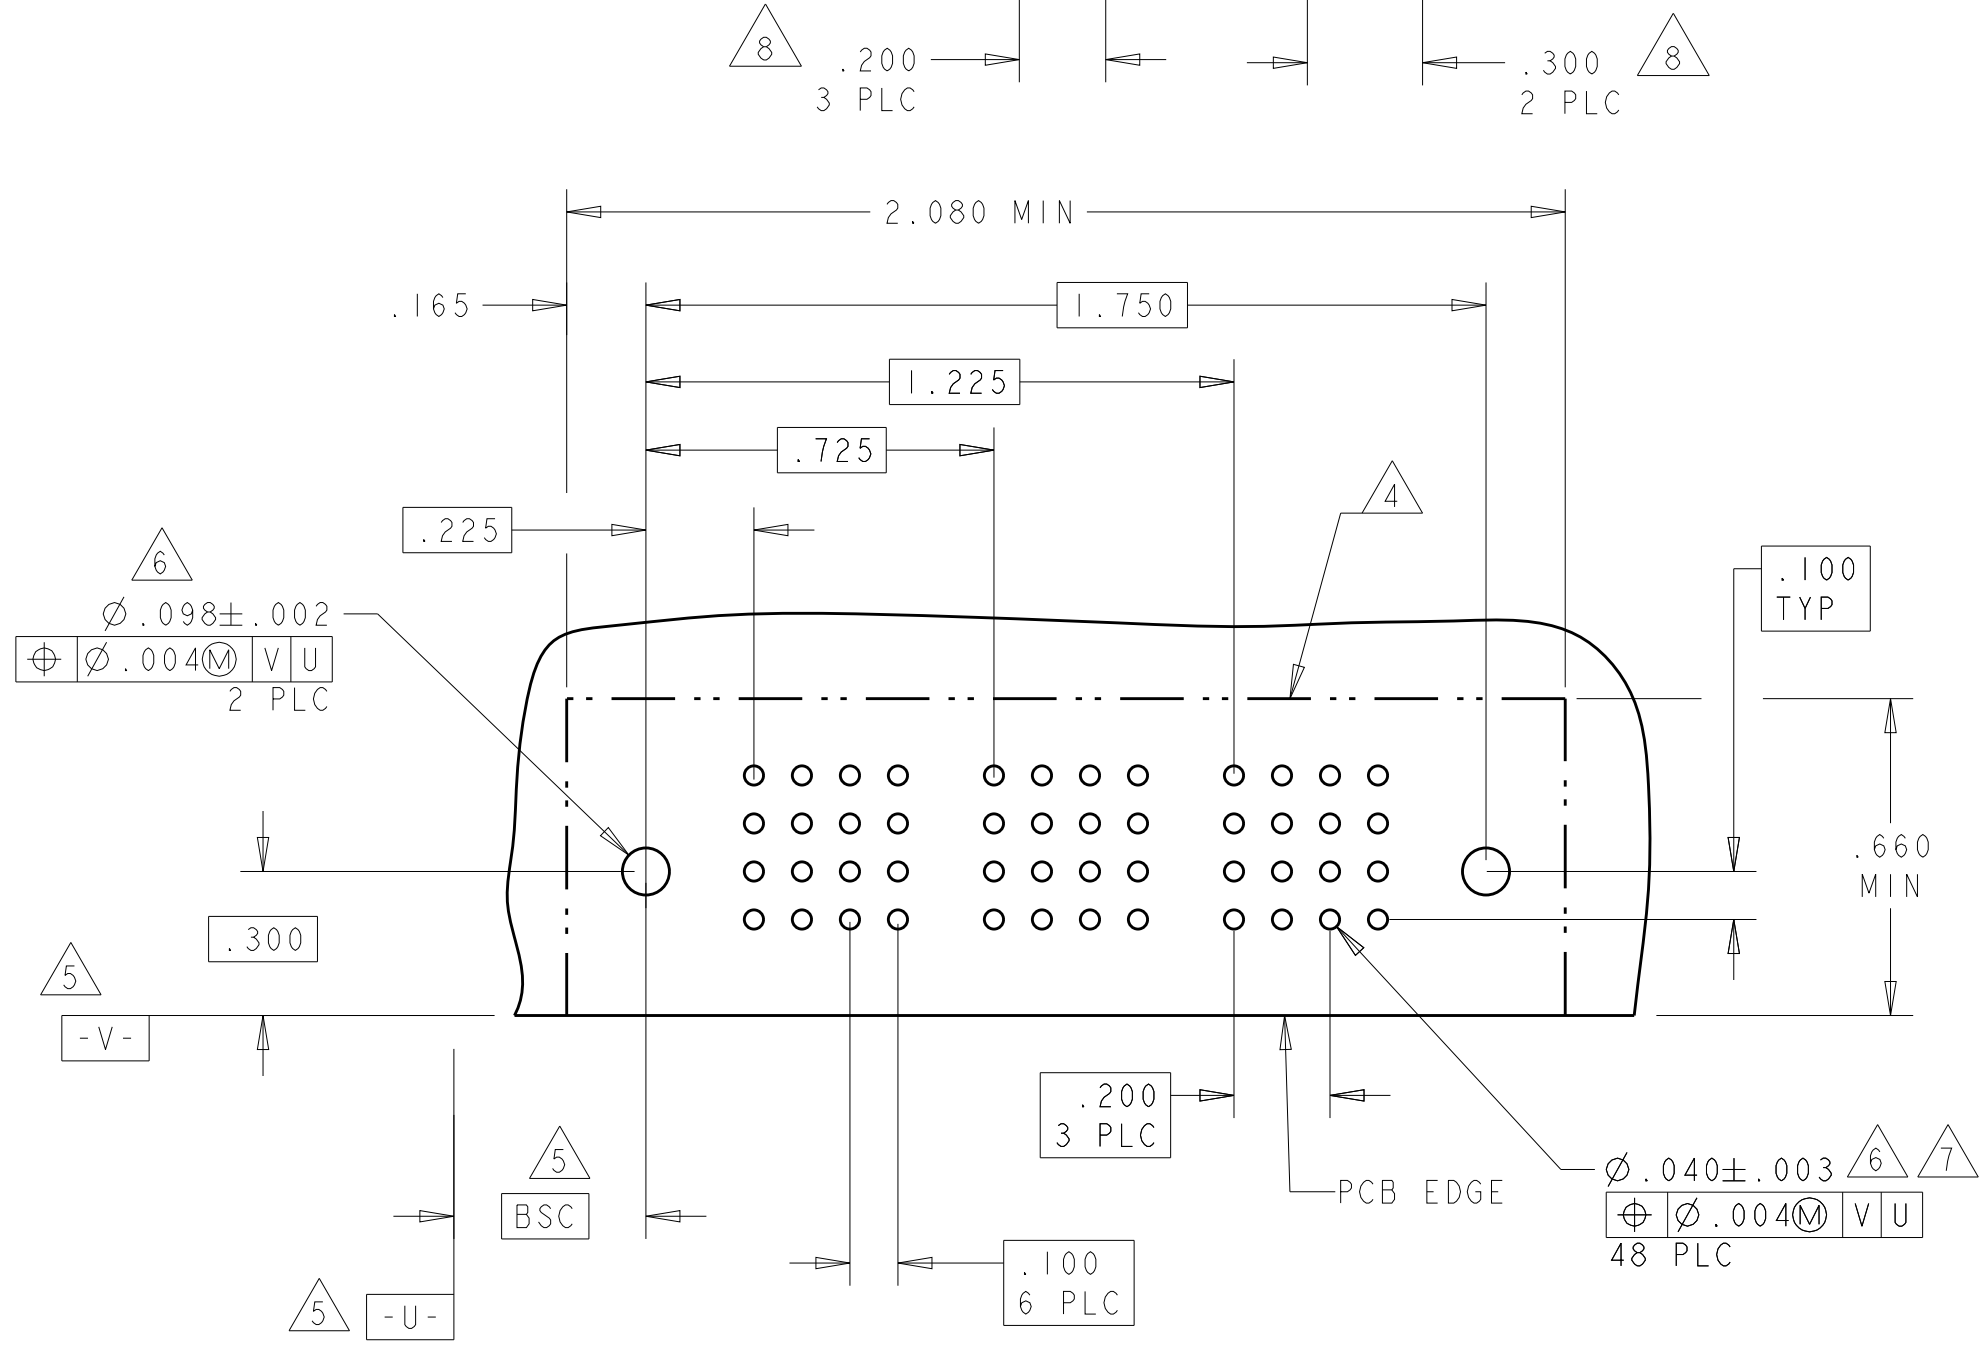


PART NUMBER	ROWS		POWER								
			P1	P2	P3	P4	P5	P6	P7	P8	
6450123-8	D C B A	HD	PM	PM	PM	PM	PM	PM	PM	PM	HD
8P											

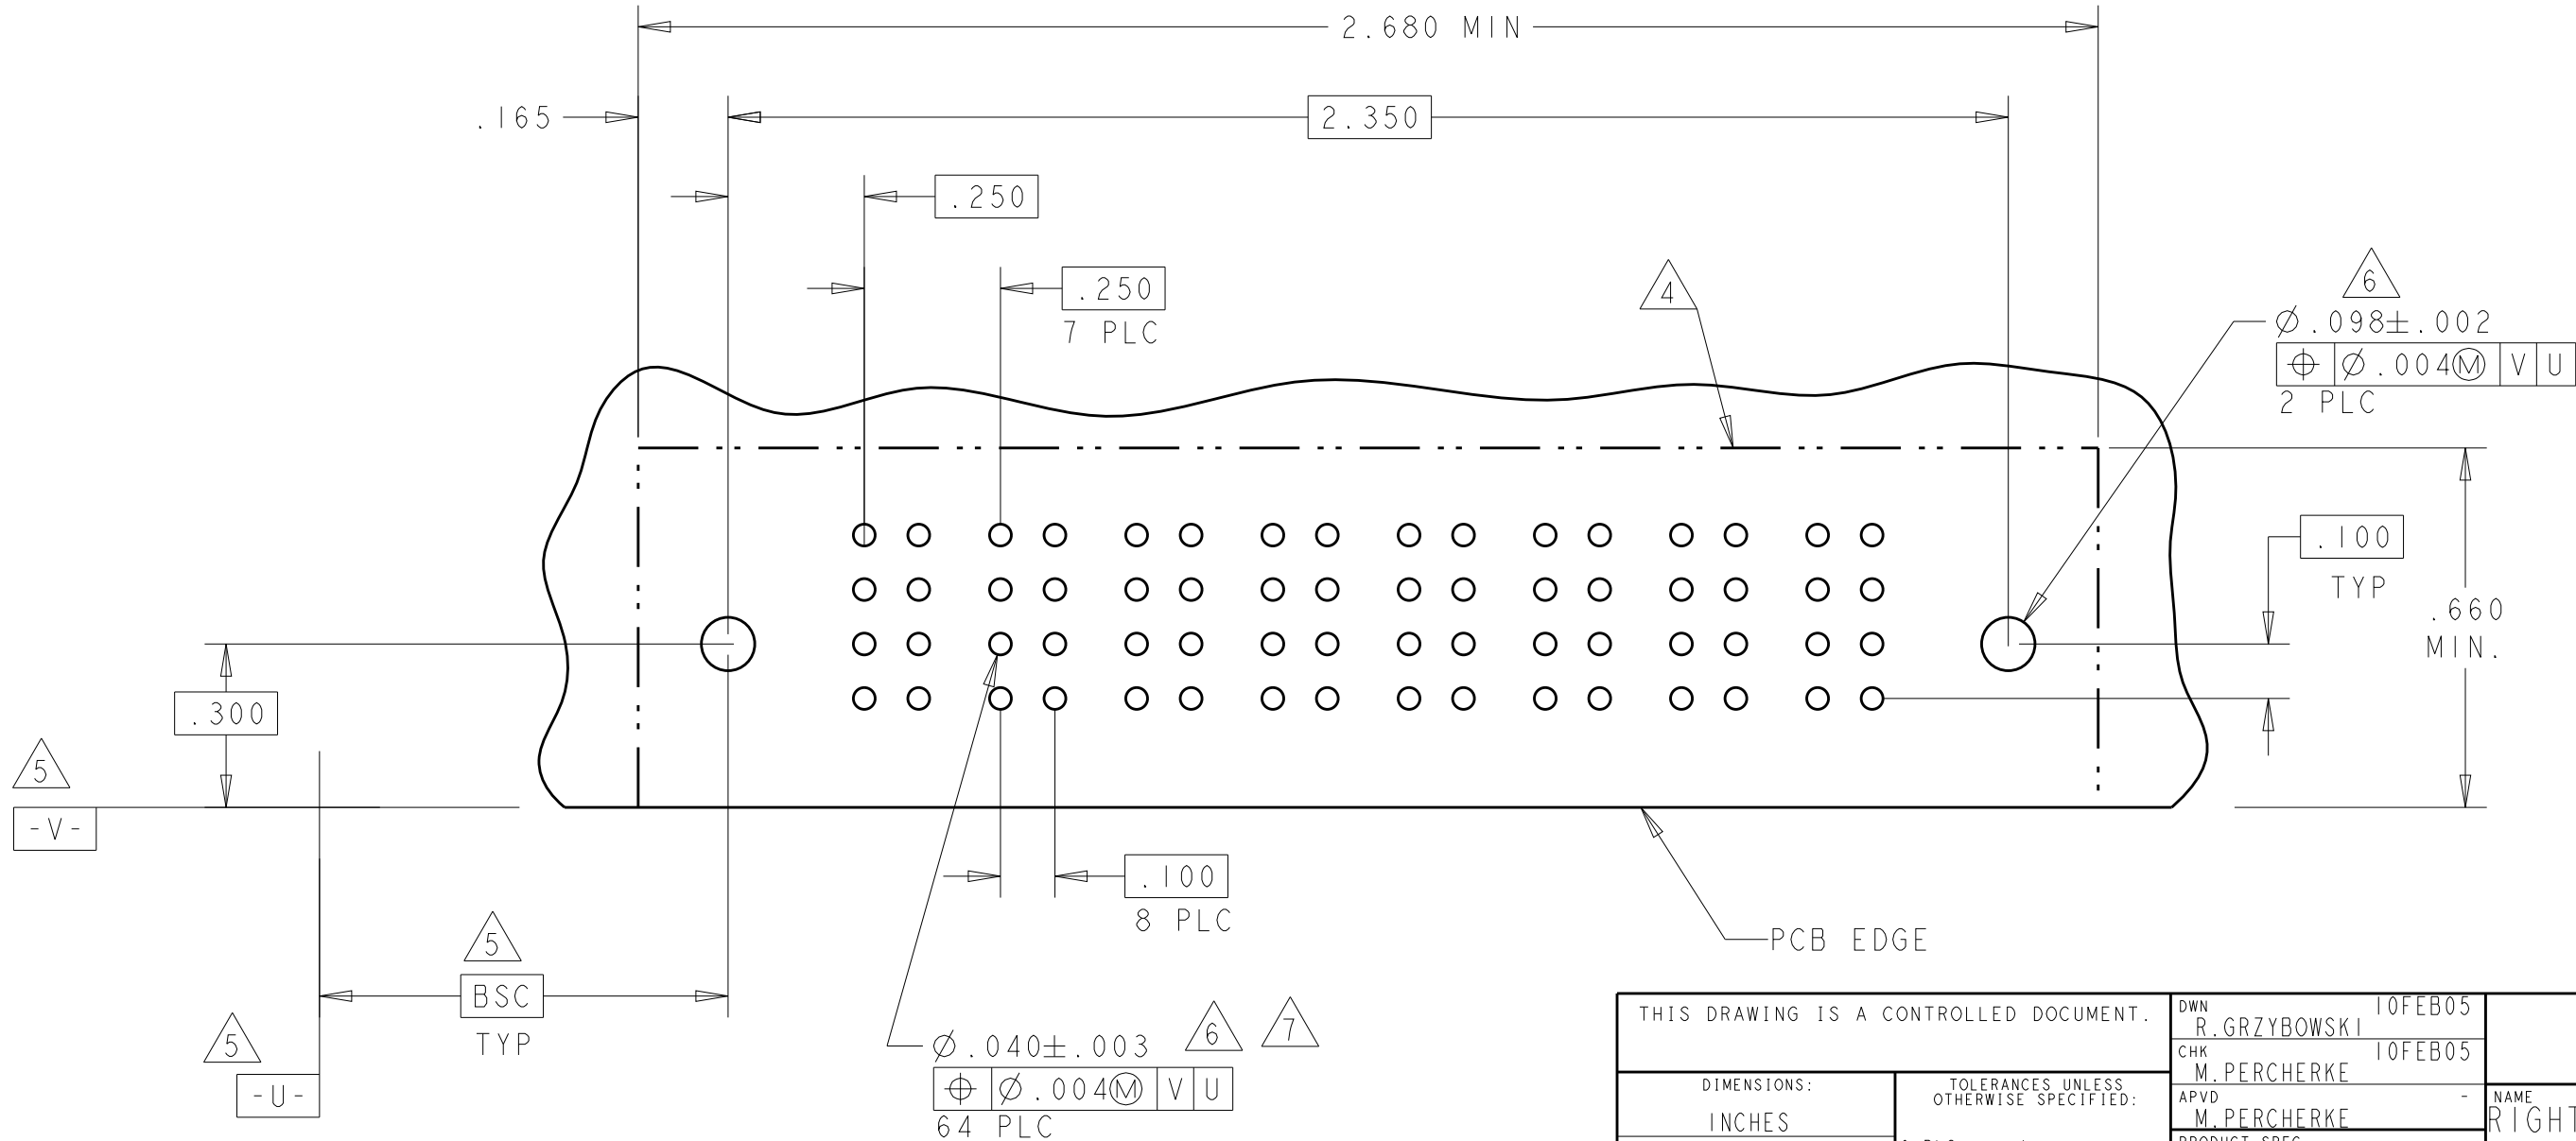


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI	10FEB05	 TE Connectivity	
DIMENSIONS:		CHK M. PERCHERKE	10FEB05		
INCHES		APVD M. PERCHERKE	-	NAME	
		PRODUCT SPEC		RIGHT ANGLE HEADER ASSEMBLY W/GUIDES MULTI-BEAM XL	
		108-1973			
		APPLICATION SPEC			
		114-13038			
MATERIAL		WEIGHT		SIZE	
-		-		CAGE CODE	
FINISH		CUSTOMER DRAWING		DRAWING NO	
-		-		A100779	
				C=6450123	
				RESTRICTED TO	
				-	
				SCALE	
				4:1	
				SHEET	
				3 of 8	
				REV	
				C6	

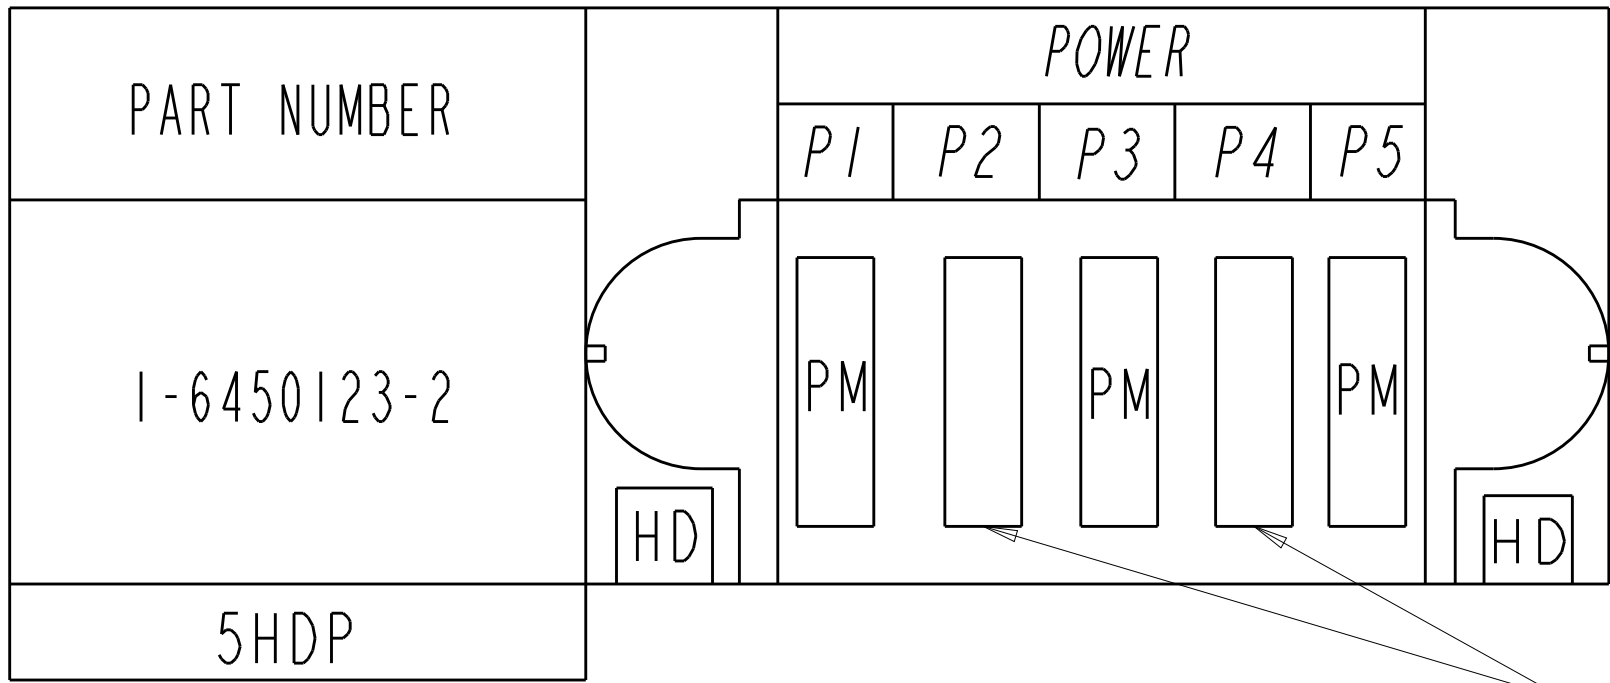



-NO LOADING CONTACT

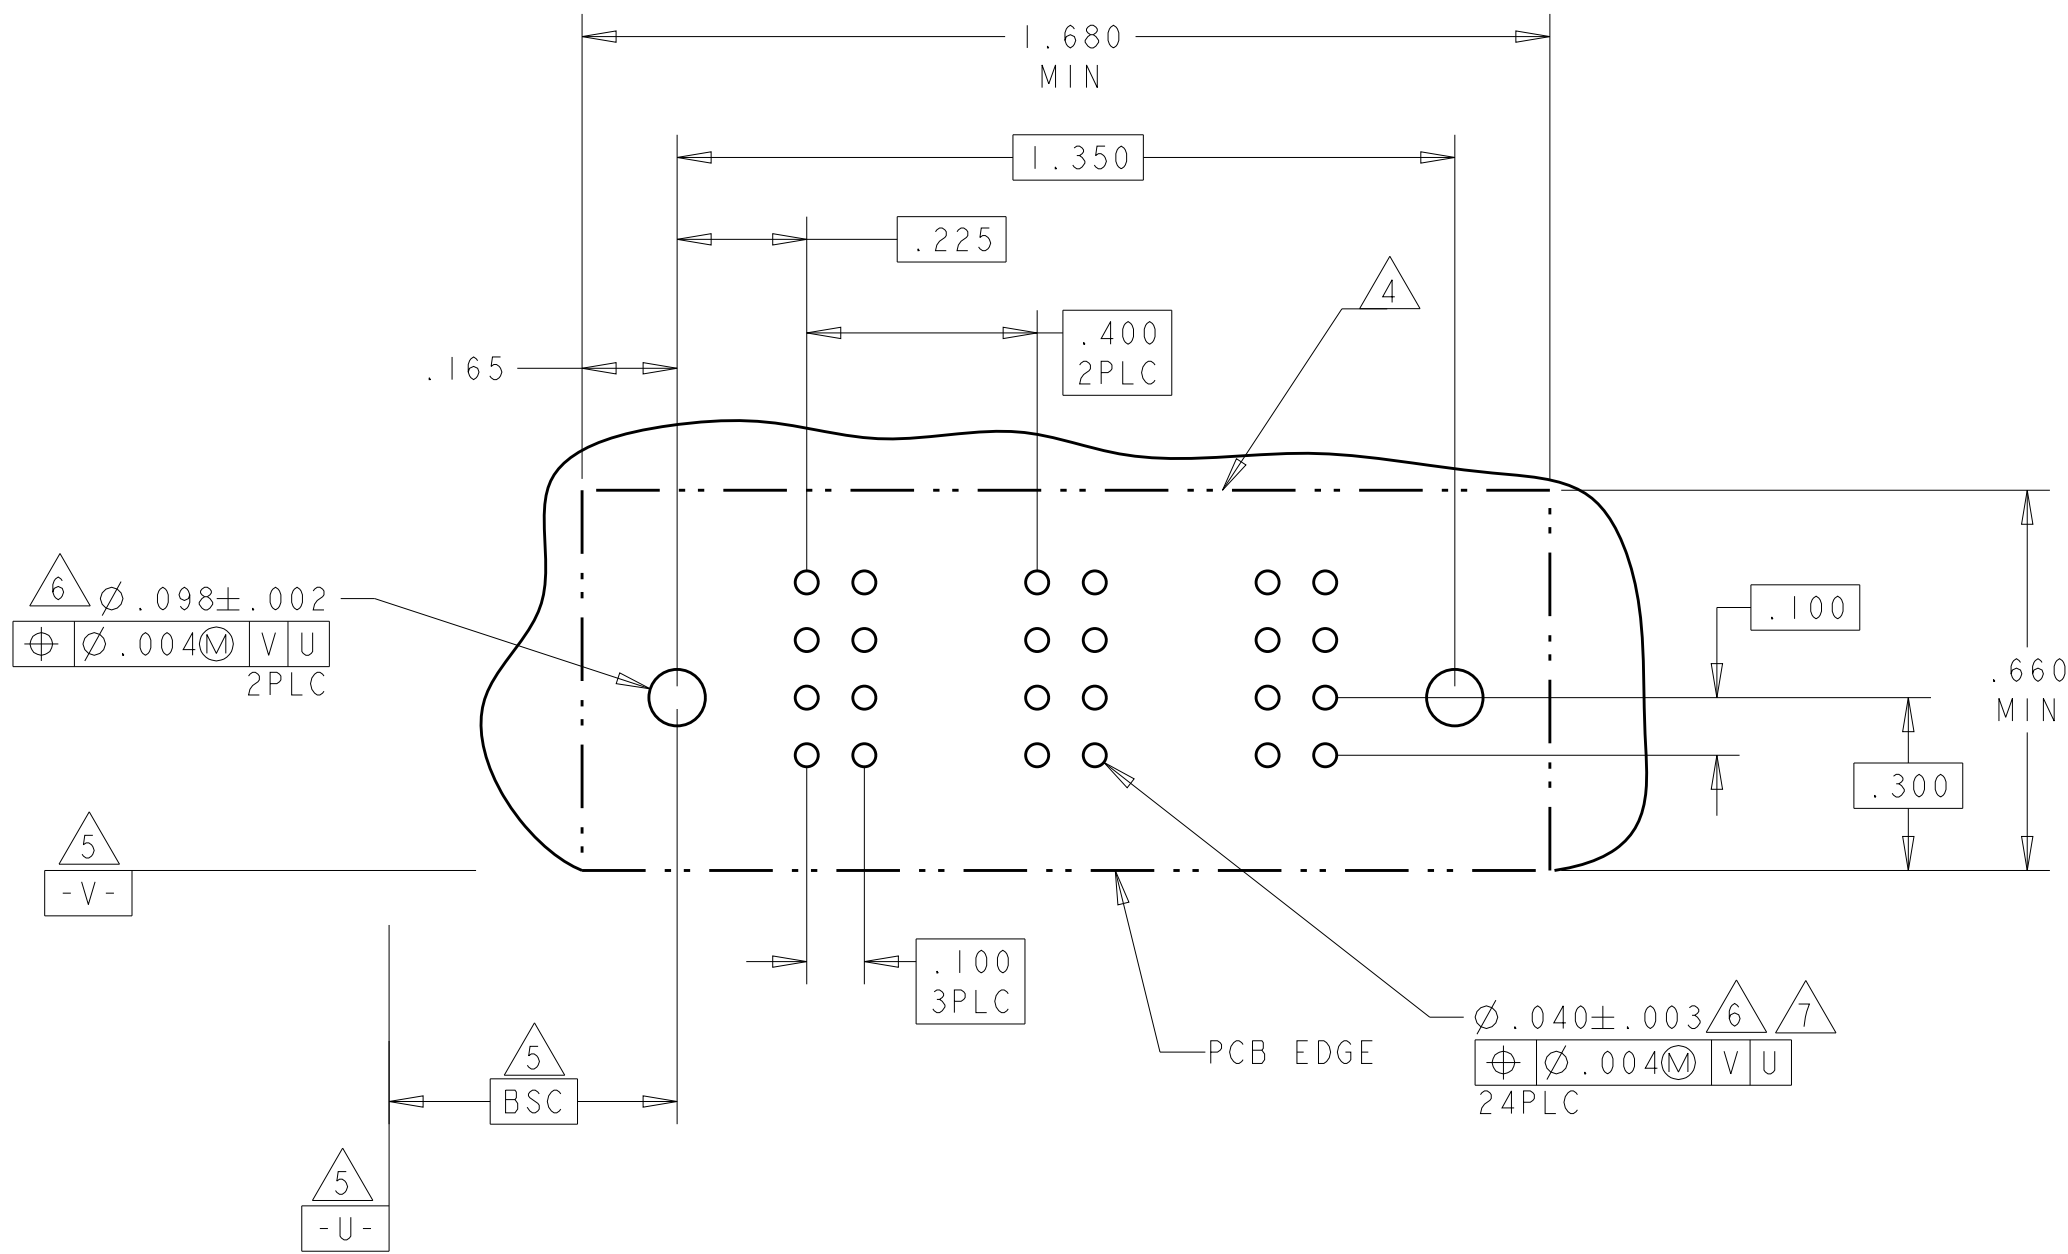
4805 (3/11)

NO CONTACTS LOADED

4805 (3/11)

[illegible]4805 (3/11)

PART NUMBER	ROWS	POWER			
		P1	P2	P3	
1-6450123-6	D C B A				
3ACP					

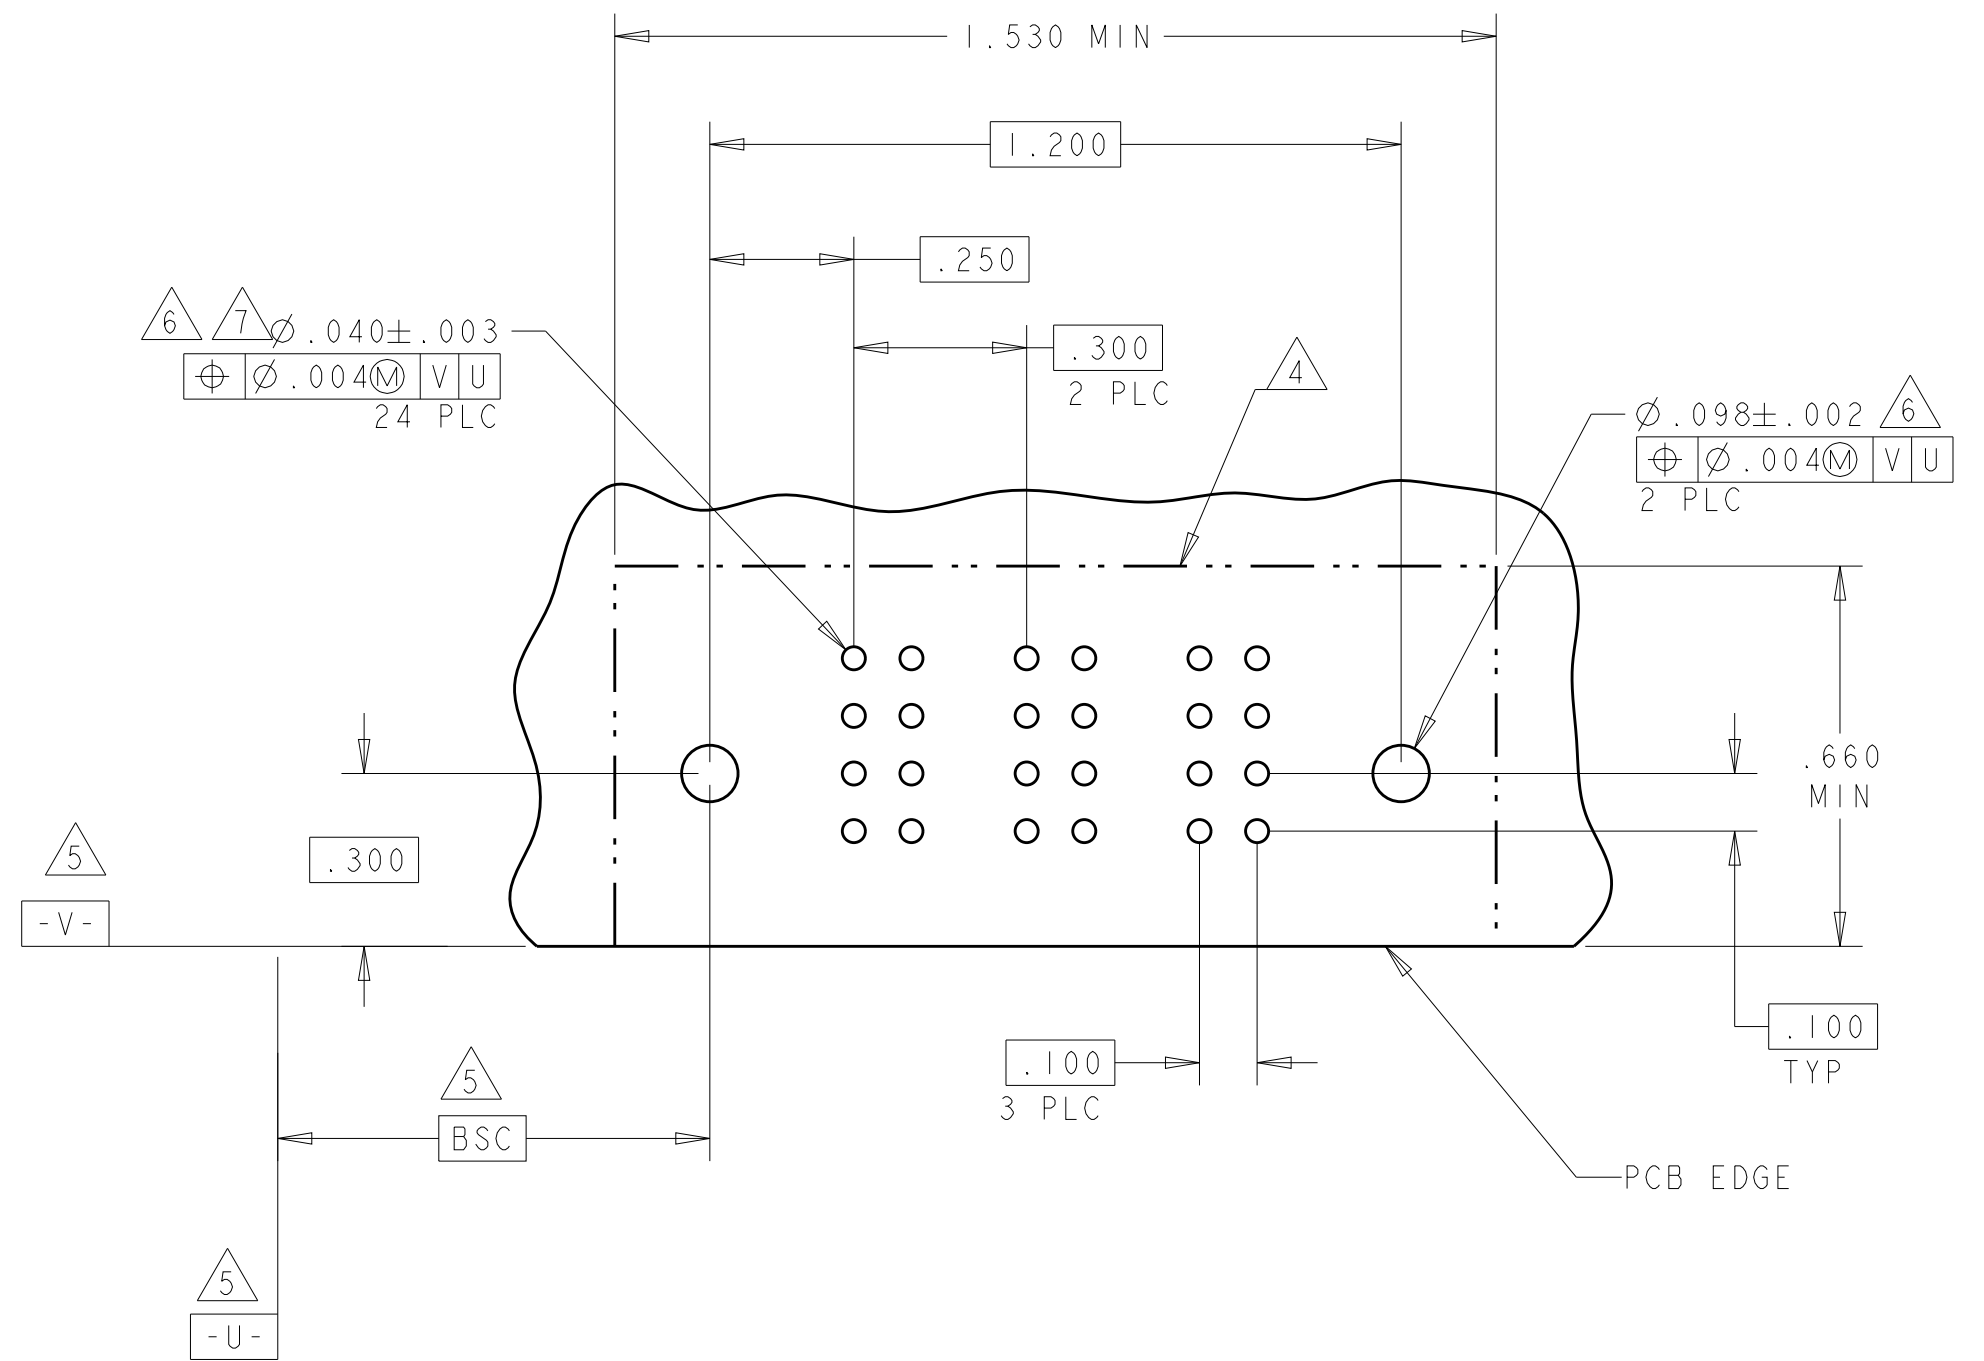4805 (3/11)

FOR PART 1-6450123-8 MAX OPERATING VOLTAGE: 480VAC AND
WITHSTAND HOT PLUG WITH 480VAC 0.1A

4805 (3/11)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9