

Upgrade!

Alchip™-MHB Series

- ESR : Less than MVH
- Endurance : 2,000 hours at 125°C
- Rated Voltage Range : 10 to 35V
- Nominal capacitance range : 47 to 470μF
- Solvent resistant type
- RoHS Compliant

MHB
↑
Lower ESR
MVH




SPECIFICATIONS

Items	Characteristics					
Category	-40 to +125℃					
Temperature Range						
Rated Voltage Range	10 to 35V _{dc}					
Capacitance Tolerance	±20%(M) (20℃, 120Hz)					
Leakage Current	I=0.01CV Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20℃ after 2 minutes)					
Dissipation Factor (tanδ)	Rated voltage(V _{dc})	10V	16V	25V	35V	(20℃, 120Hz)
	tanδ (Max.)	0.24	0.20	0.16	0.14	
Low Temperature Characteristics (Max. impedance Ratio)	Rated voltage(V _{dc})	10V	16V	25V	35V	(120Hz)
	Z(-25℃)/Z(+20℃)	3	2	2	2	
	Z(-40℃)/Z(+20℃)	4	3	3	3	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage is applied for 2,000 hours at 125℃.					
	Capacitance change	≤±30% of the initial value				
	D.F. (tanδ)	≤300% of the initial specified value				
	Leakage current	≤The initial specified value				
	ESR(-40℃, 400kHz)	HA0 : ≤6Ω JA0 : ≤4.5Ω				
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 125℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.					
	Capacitance change	≤±30% of the initial value				
	D.F. (tanδ)	≤300% of the initial specified value				
	Leakage current	≤The initial specified value				


DIMENSIONS [mm]

● Terminal Code : A

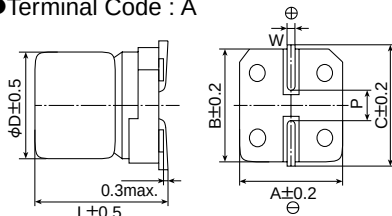

Size code	D	L	A	B	C	W	P
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

PART NUMBERING SYSTEM

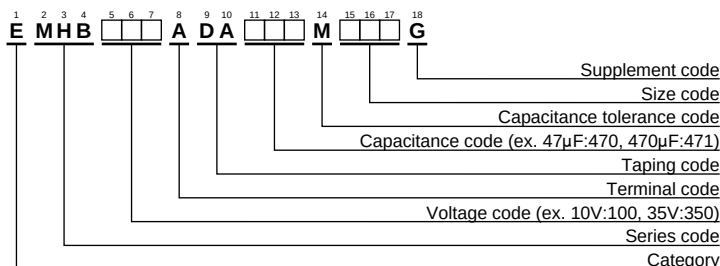

Please refer to "Product code guide (surface mount type)"

MARKING

EX) 16V220μF



● Rated voltage symbol

Rated voltage (V _{dc})	Symbol
10	A
16	C
25	E
35	V

STANDARD RATINGS

WV(V _{dc})	Cap(μF)	Size code	ESR (Ωmax/100k to 400kHz)		Rated ripple current (mA rms/125°C, 100k to 400kHz)	Part No.
			20°C	-40°C		
10	330	HA0	0.3	3.0	240	EMHB100ADA331MHA0G
	470	JA0	0.2	2.0	330	EMHB100ADA471MJA0G
16	100	HA0	0.3	3.0	240	EMHB160ADA101MHA0G
	220	HA0	0.3	3.0	240	EMHB160ADA221MHA0G
25	100	HA0	0.3	3.0	240	EMHB250ADA101MHA0G
	220	HA0	0.3	3.0	240	EMHB250ADA221MHA0G
	330	JA0	0.2	2.0	330	EMHB250ADA331MJA0G
35	47	HA0	0.3	3.0	240	EMHB350ADA470MHA0G
	100	HA0	0.3	3.0	240	EMHB350ADA101MHA0G
	100	JA0	0.2	2.0	330	EMHB350ADA101MJA0G
	220	JA0	0.2	2.0	330	EMHB350ADA221MJA0G

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9