


DESCRIPTION

The 1N4765 thru 1N4774A series of Zero-TC Reference Diodes provides a selection of 9.1 V nominal voltages and temperature coefficients to as low as 0.0005%/°C for minimal voltage change with temperature when operated at 7.5 mA. Options for screening similar to JAN, JANTX, JANTXV, and JANS also exist by using MQ, MX, MV or MSP respectively for part number prefixes and high reliability screening. Microsemi also offers numerous other Zener Reference Diode products for a variety of other voltages from 6.2 V to 200 V

APPEARANCE

**DO-7
(DO-204AA)**



IMPORTANT: For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

FEATURES

- JEDEC registered 1N935 thru 1N940 series
- Standard reference voltage of 9.1V +/- 5%
- Internal metallurgical bonds
- JANS Equivalent available via SCD
- Options for screening in accordance with MIL-PRF-19500 for JAN, JANTX, JANTXV, and JANS are available by adding MQ, MX, MV, or MSP prefixes respectively to part numbers. For example, designate "MX1N4769A" for a JANTX screen
- Radiation Hardened devices available by changing "1N" prefix to "RH", e.g. RH4769A, RH 4774A, etc. Also consult factory for "RH" data sheet brochure for other radiation hardened reference diode products.

APPLICATIONS / BENEFITS

- Provides minimal voltage changes over a broad temperature range for instrumentation and other circuit designs requiring a voltage reference
- Temperature coefficient selections available from 0.01%/°C to 0.0005%/°C
- Tight voltage tolerances available by adding tolerance 1%, 2%, 3%, etc. after part number for further identification, e.g. 1N4773A-2%, 1N4774A-1%, 1N4769-3%, 1N4769A-1%, etc.
- Flexible axial-leaded mounting terminals
- Nonsensitive to ESD per MIL-STD-750 Method 1020

MAXIMUM RATINGS

- Operating & Storage Temperature: -65°C to +175°C
- DC Power Dissipation: 250 mW @ T_L = 25°C
NOTE: For optimum voltage-temperature stability, the test current I_{ZT} = 0.5 or 1.0 mA as shown in Electrical Characteristics (less than 10 mW in dissipated power)
- Solder temperatures: 260 °C for 10 s (maximum)

MECHANICAL AND PACKAGING

- CASE: Hermetically sealed glass case with DO-7 (DO-204AA) package
- TERMINALS: Tin-lead plated and solderable per MIL-STD-750, Method 2026
- MARKING: Part number and cathode band
- POLARITY: Reference diode to be operated with the banded end positive with respect to the opposite end
- TAPE & REEL option: Standard per EIA-296 (add "TR" suffix to part number)
- WEIGHT: 0.2 grams.
- See package dimensions on last page


*** ELECTRICAL CHARACTERISTICS @ 25°C**

JEDEC TYPE NUMBER	ZENER VOLTAGE (Note 3)	ZENER TEST CURRENT	MAXIMUM DYNAMIC IMPEDANCE	MAXIMUM REVERSE CURRENT I_R @ 6 V	MAXIMUM VOLTAGE TEMPERATURE STABILITY (Note 2 & 3)	TEMPERATURE RANGE	EFFECTIVE TEMPERATURE COMPENSATIONS α_{VZ}
	V_Z @ I_{ZT}	I_{ZT}	Z_{ZT}	I_R	ΔV_{ZT}		
	VOLTS	mA	OHMS	μA	mV	°C	%/°C
1N4765	9.1	0.5	350	10	68	0 to +75	0.01
1N4765A	9.1	0.5	350	10	141	-55 to +100	0.01
1N4766	9.1	0.5	350	10	34	0 to +75	0.005
1N4766A	9.1	0.5	350	10	70	-55 to +100	0.005
1N4767	9.1	0.5	350	10	14	0 to +75	0.002
1N4767A	9.1	0.5	350	10	28	-55 to +100	0.002
1N4768	9.1	0.5	350	10	7	0 to +75	0.001
1N4768A	9.1	0.5	350	10	14	-55 to +100	0.001
1N4769	9.1	0.5	350	10	3	0 to +75	0.0005
1N4769A	9.1	0.5	350	10	7	-55 to +100	0.0005
1N4770	9.1	1.0	200	10	68	0 to +75	0.01
1N4770A	9.1	1.0	200	10	141	-55 to +100	0.01
1N4771	9.1	1.0	200	10	34	0 to +75	0.005
1N4771A	9.1	1.0	200	10	70	-55 to +100	0.005
1N4772	9.1	1.0	200	10	14	0 to +75	0.002
1N4772A	9.1	1.0	200	10	28	-55 to +100	0.002
1N4773	9.1	1.0	200	10	7	0 to +75	0.001
1N4773A	9.1	1.0	200	10	14	-55 to +100	0.001
1N4774	9.1	1.0	200	10	3	0 to +75	0.005
1N4774A	9.1	1.0	200	10	7	-55 to +100	0.005

* JEDEC Registered Data.

NOTES:

1. Measured by superimposing I_Z ac rms on I_Z dc @ +25°C where I_Z ac rms = 10% I_Z dc.
2. Maximum allowable change between any two discrete temperatures over the specified temperature range.
3. Voltage measurements to be performed 15 seconds after application of dc current.
4. Designate Radiation Hardened devices with "RH" prefix instead of "1N", i.e., RH4774A.
5. Consult factory for TX, TXV or JANS equivalent SCDs.

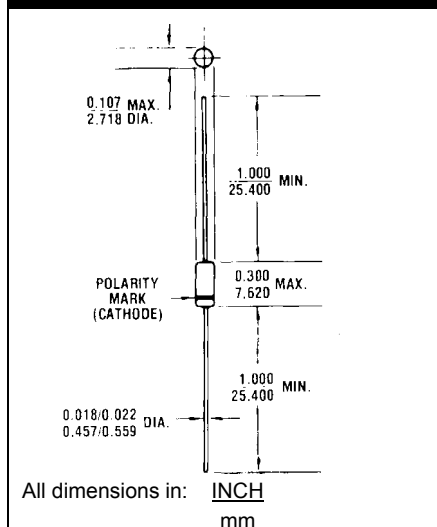PACKAGE DIMENSIONS


Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Microchip:

[1N4766A](#) [CDLL4765A/TR](#) [CDLL4771/TR](#) [CDLL4768A/TR](#) [CDLL4766A/TR](#) [CDLL4765/TR](#) [CDLL4774A/TR](#)
[CDLL4772A/TR](#) [CDLL4774/TR](#) [CDLL4769/TR](#) [CDLL4771A/TR](#) [CDLL4773/TR](#) [CDLL4770/TR](#) [CDLL4769A/TR](#)
[CDLL4768/TR](#) [CDLL4767A/TR](#) [CDLL4767/TR](#) [CDLL4773A/TR](#) [CDLL4772/TR](#) [CDLL4770A/TR](#) [CDLL4766/TR](#)
[1N4766/TR](#) [1N4772/TR](#) [1N4774/TR](#) [1N4773A/TR](#) [1N4765/TR](#) [1N4767A/TR](#) [1N4769A/TR](#) [1N4766A/TR](#)
[1N4767/TR](#) [1N4768/TR](#) [1N4768A/TR](#) [1N4770/TR](#) [1N4765A/TR](#) [1N4769/TR](#) [1N4772A/TR](#) [1N4771/TR](#) [1N4773/TR](#)
[1N4771A/TR](#) [1N4770A/TR](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9