


### DESCRIPTION

The 1N4765 thru 1N4774A series of Zero-TC Reference Diodes provides a selection of 9.1 V nominal voltages and temperature coefficients to as low as 0.0005%/°C for minimal voltage change with temperature when operated at 7.5 mA. Options for screening similar to JAN, JANTX, JANTXV, and JANS also exist by using MQ, MX, MV or MSP respectively for part number prefixes and high reliability screening. Microsemi also offers numerous other Zener Reference Diode products for a variety of other voltages from 6.2 V to 200 V

### APPEARANCE

**DO-7  
(DO-204AA)**



**IMPORTANT:** For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

### FEATURES

- JEDEC registered 1N935 thru 1N940 series
- Standard reference voltage of 9.1V +/- 5%
- Internal metallurgical bonds
- JANS Equivalent available via SCD
- Options for screening in accordance with MIL-PRF-19500 for JAN, JANTX, JANTXV, and JANS are available by adding MQ, MX, MV, or MSP prefixes respectively to part numbers. For example, designate "MX1N4769A" for a JANTX screen
- Radiation Hardened devices available by changing "1N" prefix to "RH", e.g. RH4769A, RH 4774A, etc. Also consult factory for "RH" data sheet brochure for other radiation hardened reference diode products.

### APPLICATIONS / BENEFITS

- Provides minimal voltage changes over a broad temperature range for instrumentation and other circuit designs requiring a voltage reference
- Temperature coefficient selections available from 0.01%/°C to 0.0005%/°C
- Tight voltage tolerances available by adding tolerance 1%, 2%, 3%, etc. after part number for further identification, e.g. 1N4773A-2%, 1N4774A-1%, 1N4769-3%, 1N4769A-1%, etc.
- Flexible axial-leaded mounting terminals
- Nonsensitive to ESD per MIL-STD-750 Method 1020

### MAXIMUM RATINGS

- Operating & Storage Temperature: -65°C to +175°C
- DC Power Dissipation: 250 mW @ T<sub>L</sub> = 25°C  
NOTE: For optimum voltage-temperature stability, the test current I<sub>ZT</sub> = 0.5 or 1.0 mA as shown in Electrical Characteristics (less than 10 mW in dissipated power)
- Solder temperatures: 260 °C for 10 s (maximum)

### MECHANICAL AND PACKAGING

- CASE: Hermetically sealed glass case with DO-7 (DO-204AA) package
- TERMINALS: Tin-lead plated and solderable per MIL-STD-750, Method 2026
- MARKING: Part number and cathode band
- POLARITY: Reference diode to be operated with the banded end positive with respect to the opposite end
- TAPE & REEL option: Standard per EIA-296 (add "TR" suffix to part number)
- WEIGHT: 0.2 grams.
- See package dimensions on last page


**\* ELECTRICAL CHARACTERISTICS @ 25°C**

| JEDEC<br>TYPE<br>NUMBER | ZENER<br>VOLTAGE<br>(Note 3) | ZENER<br>TEST<br>CURRENT | MAXIMUM<br>DYNAMIC<br>IMPEDANCE | MAXIMUM<br>REVERSE<br>CURRENT<br>$I_R$ @ 6 V | MAXIMUM<br>VOLTAGE<br>TEMPERATURE<br>STABILITY<br>(Note 2 & 3) | TEMPERATURE<br>RANGE | EFFECTIVE<br>TEMPERATURE<br>COMPENSATIONS<br>$\alpha_{VZ}$ |
|-------------------------|------------------------------|--------------------------|---------------------------------|----------------------------------------------|----------------------------------------------------------------|----------------------|------------------------------------------------------------|
|                         | $V_Z$ @ $I_{ZT}$             | $I_{ZT}$                 | $Z_{ZT}$                        | $I_R$                                        | $\Delta V_{ZT}$                                                |                      |                                                            |
|                         | VOLTS                        | mA                       | OHMS                            | $\mu A$                                      | mV                                                             | °C                   | %/°C                                                       |
| 1N4765                  | 9.1                          | 0.5                      | 350                             | 10                                           | 68                                                             | 0 to +75             | 0.01                                                       |
| 1N4765A                 | 9.1                          | 0.5                      | 350                             | 10                                           | 141                                                            | -55 to +100          | 0.01                                                       |
| 1N4766                  | 9.1                          | 0.5                      | 350                             | 10                                           | 34                                                             | 0 to +75             | 0.005                                                      |
| 1N4766A                 | 9.1                          | 0.5                      | 350                             | 10                                           | 70                                                             | -55 to +100          | 0.005                                                      |
| 1N4767                  | 9.1                          | 0.5                      | 350                             | 10                                           | 14                                                             | 0 to +75             | 0.002                                                      |
| 1N4767A                 | 9.1                          | 0.5                      | 350                             | 10                                           | 28                                                             | -55 to +100          | 0.002                                                      |
| 1N4768                  | 9.1                          | 0.5                      | 350                             | 10                                           | 7                                                              | 0 to +75             | 0.001                                                      |
| 1N4768A                 | 9.1                          | 0.5                      | 350                             | 10                                           | 14                                                             | -55 to +100          | 0.001                                                      |
| 1N4769                  | 9.1                          | 0.5                      | 350                             | 10                                           | 3                                                              | 0 to +75             | 0.0005                                                     |
| 1N4769A                 | 9.1                          | 0.5                      | 350                             | 10                                           | 7                                                              | -55 to +100          | 0.0005                                                     |
| 1N4770                  | 9.1                          | 1.0                      | 200                             | 10                                           | 68                                                             | 0 to +75             | 0.01                                                       |
| 1N4770A                 | 9.1                          | 1.0                      | 200                             | 10                                           | 141                                                            | -55 to +100          | 0.01                                                       |
| 1N4771                  | 9.1                          | 1.0                      | 200                             | 10                                           | 34                                                             | 0 to +75             | 0.005                                                      |
| 1N4771A                 | 9.1                          | 1.0                      | 200                             | 10                                           | 70                                                             | -55 to +100          | 0.005                                                      |
| 1N4772                  | 9.1                          | 1.0                      | 200                             | 10                                           | 14                                                             | 0 to +75             | 0.002                                                      |
| 1N4772A                 | 9.1                          | 1.0                      | 200                             | 10                                           | 28                                                             | -55 to +100          | 0.002                                                      |
| 1N4773                  | 9.1                          | 1.0                      | 200                             | 10                                           | 7                                                              | 0 to +75             | 0.001                                                      |
| 1N4773A                 | 9.1                          | 1.0                      | 200                             | 10                                           | 14                                                             | -55 to +100          | 0.001                                                      |
| 1N4774                  | 9.1                          | 1.0                      | 200                             | 10                                           | 3                                                              | 0 to +75             | 0.005                                                      |
| 1N4774A                 | 9.1                          | 1.0                      | 200                             | 10                                           | 7                                                              | -55 to +100          | 0.005                                                      |

\* JEDEC Registered Data.

**NOTES:**

1. Measured by superimposing  $I_Z$  ac rms on  $I_Z$  dc @ +25°C where  $I_Z$  ac rms = 10%  $I_Z$  dc.
2. Maximum allowable change between any two discrete temperatures over the specified temperature range.
3. Voltage measurements to be performed 15 seconds after application of dc current.
4. Designate Radiation Hardened devices with "RH" prefix instead of "1N", i.e., RH4774A.
5. Consult factory for TX, TXV or JANS equivalent SCDs.

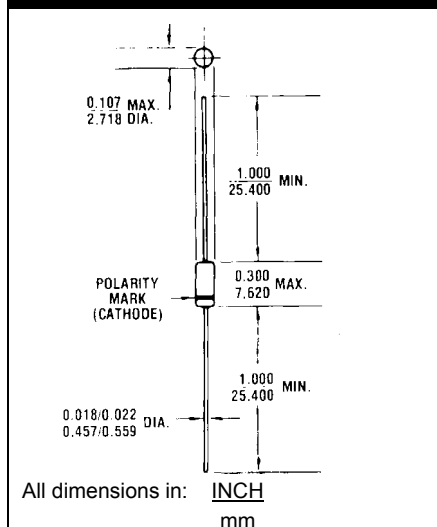**PACKAGE DIMENSIONS**


# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Microchip:

[1N4766A](#) [CDLL4765A/TR](#) [CDLL4771/TR](#) [CDLL4768A/TR](#) [CDLL4766A/TR](#) [CDLL4765/TR](#) [CDLL4774A/TR](#)  
[CDLL4772A/TR](#) [CDLL4774/TR](#) [CDLL4769/TR](#) [CDLL4771A/TR](#) [CDLL4773/TR](#) [CDLL4770/TR](#) [CDLL4769A/TR](#)  
[CDLL4768/TR](#) [CDLL4767A/TR](#) [CDLL4767/TR](#) [CDLL4773A/TR](#) [CDLL4772/TR](#) [CDLL4770A/TR](#) [CDLL4766/TR](#)  
[1N4766/TR](#) [1N4772/TR](#) [1N4774/TR](#) [1N4773A/TR](#) [1N4765/TR](#) [1N4767A/TR](#) [1N4769A/TR](#) [1N4766A/TR](#)  
[1N4767/TR](#) [1N4768/TR](#) [1N4768A/TR](#) [1N4770/TR](#) [1N4765A/TR](#) [1N4769/TR](#) [1N4772A/TR](#) [1N4771/TR](#) [1N4773/TR](#)  
[1N4771A/TR](#) [1N4770A/TR](#)

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9