


Type CDA15 Especially for Reel-Packed, Mica Capacitors

Best Value Choice for Auto Insertion Applications

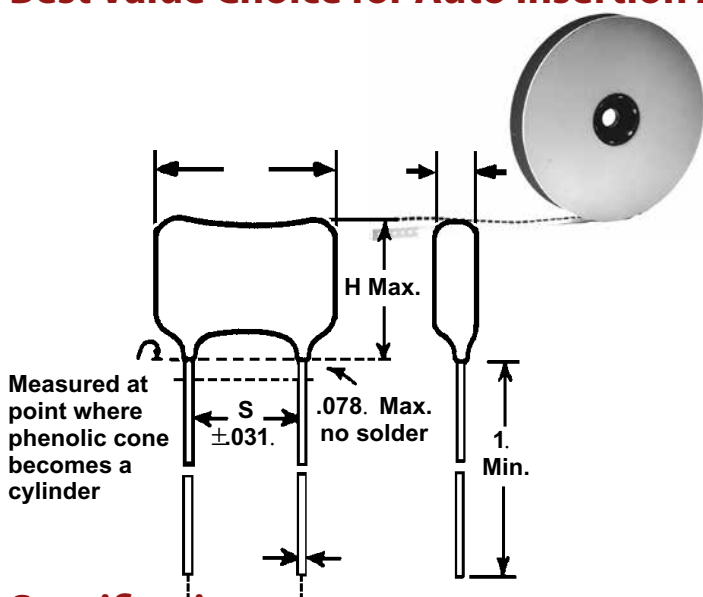

Type CDA15 is designed especially for auto-insertion and is the best value choice for tape and reel and ammo-pack feed systems. CDA15 is used in commercial and industrial applications requiring high stability, high Q and close capacitance tolerances. Type CDA15 is ideal for tuned circuits, delay lines and filter circuits.

Highlights

- ◆ Available only on tape/reel or ammo pack
- ◆ High temperature — up to 150 °C
- ◆ 100,000 V/μs dV/dt pulse capability minimum
- ◆ Non-flammable units that meet IEC 695-2-2 are available.
- ◆ 0.200" lead spacing

Specifications

Capacitance Range: 1 pF to 1,500pF
Voltage Range: 100 Vdc to 500 Vdc
Capacitance Tolerance: ±½ pF (D), ±1 pF (C), ±½% (E), ±1% (F), ±2% (G), ±5% (J)
Temperature Range: -55 °C to +125 °C (O)
-55 °C to +150 °C (P)
Lead Material: Copper

Ratings

Cap (pF)	Catalog Part Number	L In (mm)	H In (mm)	T In (mm)
100 Vdc .200" (5.1) L/S				
910	CDA15FA911J03	.450 (11.4)	.400 (10.2)	.170 (4.3)
1000	CDA15FA102J03	.450 (11.4)	.400 (10.2)	.170 (4.3)
1100	CDA15FA112J03	.460 (11.7)	.400 (10.2)	.180 (4.6)
1200	CDA15FA122J03	.460 (11.7)	.420 (10.7)	.180 (4.6)
1500	CDA15FA152J03	.460 (11.7)	.430 (10.9)	.180 (4.6)
300 Vdc .200" (5.1) L/S				
560	CDA15FC561J03	.450 (11.4)	.380 (9.7)	.160 (4.1)
620	CDA15FC621J03	.450 (11.4)	.380 (9.7)	.160 (4.1)
680	CDA15FC681J03	.450 (11.4)	.390 (9.9)	.160 (4.1)
750	CDA15FC751J03	.450 (11.4)	.390 (9.9)	.170 (4.3)
820	CDA15FC821J03	.450 (11.4)	.390 (9.9)	.170 (4.3)
500 Vdc .200" (5.1) L/S				
1	CDA15CD010D03	.430 (10.9)	.360 (9.1)	.140 (3.6)
2	CDA15CD020D03	.430 (10.9)	.360 (9.1)	.140 (3.6)
3	CDA15CD030D03	.430 (10.9)	.360 (9.1)	.140 (3.6)
4	CDA15CD040D03	.430 (10.9)	.360 (9.1)	.140 (3.6)
5	CDA15CD050D03	.430 (10.9)	.360 (9.1)	.140 (3.6)
6	CDA15CD060D03	.430 (10.9)	.360 (9.1)	.140 (3.6)
7	CDA15CD070D03	.430 (10.9)	.360 (9.1)	.140 (3.6)
8	CDA15CD080D03	.430 (10.9)	.360 (9.1)	.140 (3.6)
10	CDA15CD100J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
12	CDA15CD120J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
15	CDA15CD150J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
18	CDA15CD180J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
20	CDA15ED200J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
22	CDA15ED220J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
24	CDA15ED240J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
27	CDA15ED270J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
30	CDA15ED300J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
33	CDA15ED330J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
36	CDA15ED360J03	.430 (10.9)	.360 (9.1)	.140 (3.6)

Cap (pF)	Catalog Part Number	L In (mm)	H In (mm)	T In (mm)
500 Vdc .200" (5.1) L/S				
39	CDA15ED390J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
43	CDA15ED430J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
47	CDA15ED470J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
50	CDA15ED500J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
51	CDA15ED510J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
56	CDA15ED560J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
62	CDA15ED620J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
68	CDA15ED680J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
75	CDA15ED750J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
82	CDA15ED820J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
91	CDA15FD910J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
100	CDA15FD101J03	.430 (10.9)	.360 (9.1)	.140 (3.6)
110	CDA15FD111J03	.440 (11.2)	.360 (9.1)	.150 (3.8)
120	CDA15FD121J03	.440 (11.2)	.360 (9.1)	.150 (3.8)
130	CDA15FD131J03	.440 (11.2)	.360 (9.1)	.150 (3.8)
150	CDA15FD151J03	.440 (11.2)	.360 (9.1)	.150 (3.8)
160	CDA15FD161J03	.440 (11.2)	.360 (9.1)	.150 (3.8)
180	CDA15FD181J03	.440 (11.2)	.360 (9.1)	.160 (4.1)
200	CDA15FD201J03	.440 (11.2)	.360 (9.1)	.160 (4.1)
220	CDA15FD221J03	.440 (11.2)	.360 (9.1)	.160 (4.1)
240	CDA15FD241J03	.440 (11.2)	.360 (9.1)	.160 (4.1)
250	CDA15FD251J03	.440 (11.2)	.360 (9.1)	.160 (4.1)
270	CDA15FD271J03	.440 (11.2)	.360 (9.1)	.160 (4.1)
300	CDA15FD301J03	.440 (11.2)	.360 (9.1)	.160 (4.1)
330	CDA15FD331J03	.440 (11.2)	.360 (9.1)	.160 (4.1)
360	CDA15FD361J03	.440 (11.2)	.370 (9.4)	.160 (4.1)
390	CDA15FD391J03	.440 (11.2)	.370 (9.4)	.160 (4.1)
430	CDA15FD431J03	.440 (11.2)	.380 (9.7)	.160 (4.1)
470	CDA15FD471J03	.440 (11.2)	.380 (9.7)	.160 (4.1)
500	CDA15FD501J03	.440 (11.2)	.380 (9.7)	.160 (4.1)
510	CDA15FD511J03	.440 (11.2)	.380 (9.7)	.160 (4.1)

Type CDA15 Especially for Reel-Packed, Mica Capacitors

Notice and Disclaimer: All product drawings, descriptions, specifications, statements, information and data (collectively, the "Information") in this datasheet or other publication are subject to change. The customer is responsible for checking, confirming and verifying the extent to which the Information contained in this datasheet or other publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without any guarantee, warranty, representation or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on the knowledge that the Cornell Dubilier company providing such statements ("Cornell Dubilier") has of operating conditions that such Cornell Dubilier company regards as typical for such applications, but are not intended to constitute any guarantee, warranty or representation regarding any such matter – and Cornell Dubilier specifically and expressly disclaims any guarantee, warranty or representation concerning the suitability for a specific customer application, use, storage, transportation, or operating environment. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by Cornell Dubilier with reference to the use of any Cornell Dubilier products is given gratis (unless otherwise specified by Cornell Dubilier), and Cornell Dubilier assumes no obligation or liability for the advice given or results obtained. Although Cornell Dubilier strives to apply the most stringent quality and safety standards regarding the design and manufacturing of its products, in light of the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies or other appropriate protective measures) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage. Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated in such warnings, cautions and notes, or that other safety measures may not be required.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9