




TL3240 SERIES TACT SWITCH

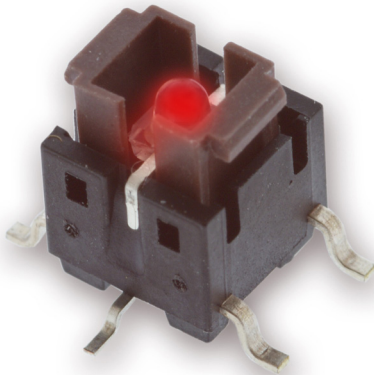

APPLICATIONS / MARKETS



Audio / Visual



Computer Peripherals



Consumer Electronics



Instrumentation



Telecommunication



Medical Equipment

RoHS

SPECIFICATIONS

Electrical Rating: 50mA @ 12VDC
Life Expectancy: 200,000 Cycles
Contact Resistance: 100mΩ Max.
Insulation Resistance: 100 MΩ Min. at 500VDC
Dielectric Strength: 250VAC for 1 min.
Operating Temperature: -25°C to 70°C
Storage Temperature: -30°C to 80°C
Operating Force: 100 gf; 160 gf; 260 gf
Travel: 0.2mm
Contact Arrangement: SPST, Normally Open

FEATURES & BENEFITS

- Illumination options
- Tape & Reel packaging: 450 pieces per reel
- Caps sold separately
- Surface Mount

PART NUMBER CONFIGURATOR

Series	Model	Force	LED	Cap*	Cap Insert Color
TL	3240	F100 F100 - 100 gf F160 F160 - 160 gf F260 F260 - 260 gf	B B - Blue R R - Red G G - Green Y Y - Yellow	TL3240R1CAP TL3240S1CAP	BLK BLK - Black RED RED - Red BLU BLU - Blue IVR IVR - Ivory GRN GRN - Green YEL YEL - Yellow

* Cap to be ordered separately. *They cannot go thru the reflow soldering process.*

Specifications subject to change without notice



E-SWITCH®

www.e-switch.com

800.867.2717

2

ANTI-VANDAL SWITCHES	DETECTOR SWITCHES	DIP SWITCHES	KEYLOCK SWITCHES	NAVIGATION SWITCHES	PUSHBUTTON SWITCHES	ROCKER SWITCHES	ROTARY SWITCHES	SLIDE SWITCHES	SNAP ACTION SWITCHES	TACTILE SWITCHES	TOGGLE SWITCHES	CAP OPTIONS
----------------------	-------------------	--------------	------------------	---------------------	---------------------	-----------------	-----------------	----------------	----------------------	------------------	-----------------	-------------

Top Left Drawing: A top-down view of a package with six pins labeled 1 through 6. Dimensions include a central pin width of 0.61 [0.240] in, a side pin width of 0.65 [0.026] in, a total width of 3.00 [0.118] in, a height of 4.50 [0.177] in, and a bottom pin width of 3.50 [0.138] in.



Bottom Left Drawing: A front view of a package showing two internal components. Dimensions include a top width of 0.80 [0.031] in, a main body width of 6.00 [0.236] in, a total width of 8.00 [0.315] in, a base width of 10.00 [0.394] in, a height of 7.80 [0.307] in, and a base offset of 0.50 [0.020] in.

Middle Right Drawing: A side view of a package. Dimensions include a top width of 4.04 [0.159] in, a base width of 2.90 [0.114] in, a main body width of 8.00 [0.315] in, and a total width of 10.00 [0.394] in.

Far Right Drawing: A front view of a package with three pins labeled 3, 4, and 5. It features a "COLOR MARK ON CATHODE LEAD". Dimensions include a main body width of 8.00 [0.315] in and a total width of 10.00 [0.394] in.

Bottom Left Drawing (Circular Package): A top-down view of a circular package with six pins labeled 1 through 6. Dimensions include a diameter of Ø.80 [0.031] in, a pin width of 1.85 [0.073] in, and a total width of 4.20 [0.165] in.

LED Specifications			
	Forward Current (mA)	Forward Voltage V @ 20mA	L Intensity
Blue	20mA	3.2 typ. - 3.6 max. VDC	1
Green	20mA	2.0 typ. - 2.5 max VDC	5
Red	20mA	1.8 typ. - 2.6 max VDC	
Yellow	20mA	2.0 typ. - 2.6 max VDC	

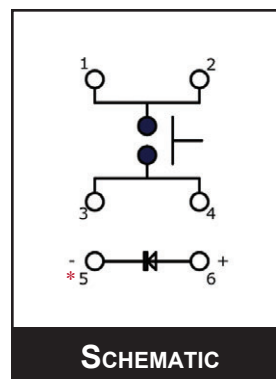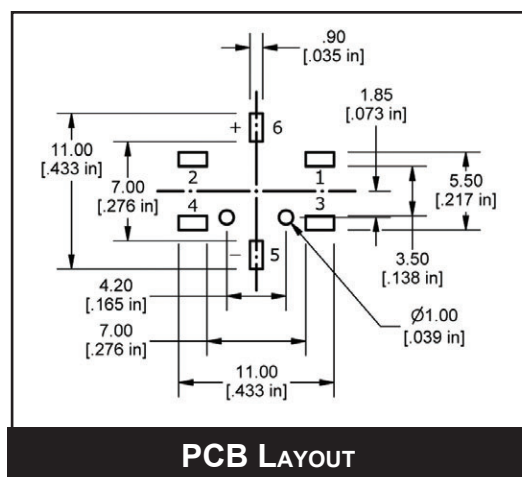




* For the RED LED option, Pin #5 is the anode and Pin #6 is the cathode side of the LED.

CAP OPTIONS



Caps are sold separately with a unique part number, as shown in the ordering code on the first page. They CANNOT GO THROUGH THE REFLOW SOLDERING PROCESS. Colors available include red, blue, green, black, ivory and yellow.



R1 Cap

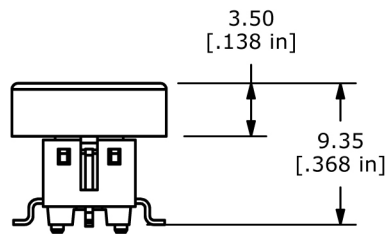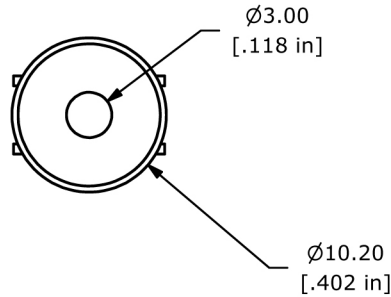

S1 Cap

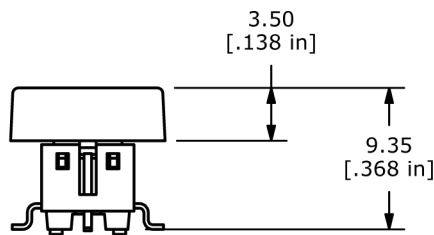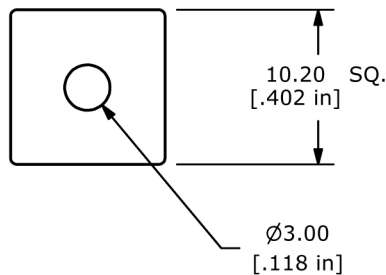

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9