

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20


BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
JDIST
-


REVISONS

変更


P	LTR	DESCRIPTION	DATE	DWN	APVD
O		RELEASED FJ00-1726-01	10SEP2001	D.M	S.M
A		ADD P/N FJ00-1227-02	10MAY2002	D.M	S.M
B		REVISED. ADD P/N FJ00-2621-02	26DEC02	D.M	S.M
C		ADD P/N FJ00-2644-02	30JAN'03	S.Y	S.M

1473562-4:AS SHOWN
1473562-4:本図

PLUG HOUSING

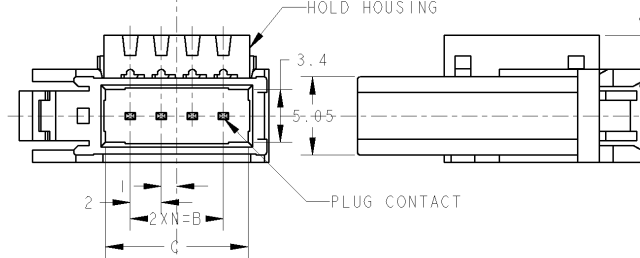

HOLD HOUSING



〈Table of Insulation Dia (Cable suitable for e-CON.)〉 〈被覆外径一覧表 (e-CON 対応電線)〉			
ORANGE	φ0.60~0.90	3-1473562-□	SEE SHEET 3
RED	φ0.90~1.00	1-1473562-□	SEE SHEET 1
YELLOW	φ1.00~1.15	1473562-□	SEE SHEET 1
BLUE	φ1.15~1.35	2-1473562-□	SEE SHEET 1
GREEN	φ1.35~1.60	4-1473562-□	SEE SHEET 2
HOLD HSG COLOR	INSULATION DIA	P/N	SHEET No

取扱説明書 (Instruction Sheet): 411-78014

注記
1 材料: PLUG HOUSING: ガラス入り熱可塑性ポリエステル樹脂 94V-0 黒
HOLD HOUSING: ポリカーボネイト 94V-0 黄色: 0-、赤色: 1-、青色: 2-
コンタクト: 銅合金
2 メッキ: 全面Ni下地: 1.27μm以上
接点部: 0.2μm MIN 金メッキ
3 -5 (5POS) と -7 (7POS) は、回路番号6と8にコンタクトが装着されません

NOTE

1 MATERIAL: PLUG HOUSING: GLASS FILLED THERMOPLASTIC, 94V-0, BLACK
HOLD HOUSING: PC, 94V-0, YELLOW: 0-, RED: 1-, BLUE: 2-
CONTACT: COPPER ALLOY
2 FINISH: UNDERPLATE: Ni 1.27μm min
CONTACT AREA: Au 0.2μm min
3 -5 (5POS) AND -7 (7POS) DO NOT EQUIP WITH CONTACT OF CIRCUIT NO 6 AND 8.

BLUE	20.35	17.2	14	24.1	7	8	2-1473562-8
RED	20.35	17.2	14	24.1	7	8	1-1473562-8
YELLOW	20.35	17.2	14	24.1	7	8	1473562-8
BLUE	20.35	17.2	14	24.1	7	7	3-2-1473562-7
RED	20.35	17.2	14	24.1	7	7	3-1-1473562-7
YELLOW	20.35	17.2	14	24.1	7	7	3-1473562-7
BLUE	16.35	13.2	10	20.1	5	6	2-1473562-6
RED	16.35	13.2	10	20.1	5	6	1-1473562-6
YELLOW	16.35	13.2	10	20.1	5	6	1473562-6
BLUE	16.35	13.2	10	20.1	5	5	3-2-1473562-5
RED	16.35	13.2	10	20.1	5	5	3-1-1473562-5
YELLOW	16.35	13.2	10	20.1	5	5	3-1473562-5
BLUE	12.35	9.2	6	16.1	3	4	2-1473562-4
RED	12.35	9.2	6	16.1	3	4	1-1473562-4
YELLOW	12.35	9.2	6	16.1	3	4	1473562-4
BLUE	10.35	7.2	4	14.1	2	3	2-1473562-3
RED	10.35	7.2	4	14.1	2	3	1-1473562-3
YELLOW	10.35	7.2	4	14.1	2	3	1473562-3
HOLD HSG COLOR	D	C	B	A	N	POS	P/N

WIRE RANGE
被覆電線径範囲
SEE 108-5765
INSULATION DIA
被覆径THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: 単位: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC	±0.2
1 PLC	±0.2
2 PLC	±0.2
3 PLC	±0.2
4 PLC	±0.2
ANGLES	±0.2
FINISH 仕上げ	SEE NOTE

DWN D. MITSUGI	10SEP2001
CHN S. MANABE	10SEP2001
APVD S. MANABE	10SEP2001
PRODUCT SPEC 製品仕様	108-5765
APPLICATION SPEC 取付・使用電線	
WEIGHT	-
CUSTOMER DRAWING	

tyco Electronics	Tyco Electronics AMP K.K. Kawasaki, Japan
NAME 名称	PLUG ASSY FOR e-CON - RITS CONN. -
SIZE 寸法	A3
CAGE CODE 番号	00779
DRAWING NO. 図号	C=1473562
RESTRICTED TO	-
SCALE 寸法	4:1
SHEET 枚数	1 OF 3
REV 改訂	C

AMP 1470-19 REV 31MAR2000

P10/ENGINEER DRAWING

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

COPYRIGHT 20

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISONS

変更

P

LTR

DESCRIPTION


ECN

DATE


DWN

APVD

SEE SHEET 1 OF 3




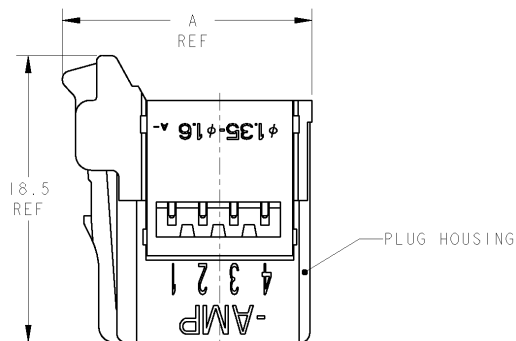
4-1473562-4:AS SHOWN
4-1473562-4:本図

- △ 材料 PLUG HOUSING : ガラス入り熱可塑性ポリエステル樹脂 94V-0 黒
HOLD HOUSING : ポリカーボネイト 94V-0 緑色: 4-
コンタクト: 銅合金
- △ 仕上げ 全面: ニッケルメッキ下地 1.27μm以上
接点部: 金メッキ 0.2μm以上
- △ -5(5POS)と-7(7POS)は、回路番号6と8にコンタクトが装着されません



2:1

- △ MATERIAL PLUG HOUSING : GLASS FILLED THERMOPLASTIC, 94V-0, BLACK
HOLD HOUSING : PC, 94V-0, GREEN: 4-
CONTACT : COPPER ALLOY
- △ FINISH UNDERPLATE : Ni PLATING ALL SURFACE 1.27μm MIN
CONTACT AREA : Au PLATING 0.2μm MIN
- △ -5(5POS) AND -7(7POS) DO NOT EQUIP WITH CONTACT OF CIRCUIT NO 6 AND 8.

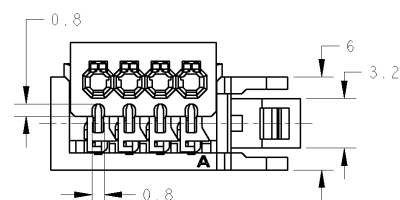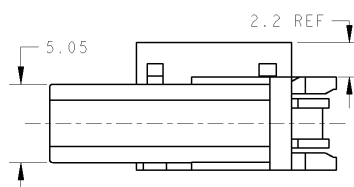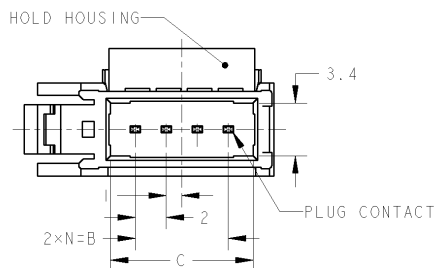

取扱説明書 (Instruction Sheet): 411-78014

GREEN	20.35	17.2	14	24.1	7	8	4-1473562-8
	20.35	17.2	14	24.1	7	7	△4-1473562-7
	16.35	13.2	10	20.1	5	6	4-1473562-6
	16.35	13.2	10	20.1	5	5	△4-1473562-5
	12.35	9.2	6	16.1	3	4	4-1473562-4
	10.35	7.2	4	14.1	2	3	4-1473562-3
HOLD HSG COLOR	D	C	B	A	N	POS.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: 単位: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±
FINISH 仕上げ	SEE NOTE

DWN K. RIKU	26DEC02	tyco Electronics	Tyco Electronics AMP K.K. Kawasaki, Japan		
CHN D. MITSUGI	26DEC02				
APVD S. MANABE	26DEC02				
PRODUCT SPEC 製品仕様	108-5765	NAME EOR	PLUG ASSY FOR e-CON - RITS CONN. -		
APPLICATION SPEC 取付配線図		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
WEIGHT	-	A3	00779	C-1473562	
CUSTOMER DRAWING		SCALE 2.1		SHEET 2 OF 3	REV

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

20

COPYRIGHT 2003





BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISONS					
		P	LTR	DESCRIPTION	ECN	DATE	DWN
J	-			SEE SHEET 1 OF 3			

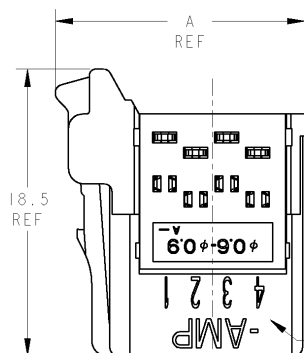3-1473562-4 : AS SHOWN
3-1473562-4 : 本図

- 1 材料: PLUG HOUSING : ガラス入り熱可塑性ポリエステル樹脂 94V-0 黒
HOLD HOUSING : ポリカーボネイト 94V-0 オレンジ色: 3-
コンタクト: 銅合金
- 2 メッキ: 全面ニッケル下地: 1.27μm以上
接点部: 金メッキ: 0.2μm以上
- 3 -5(5POS)と-7(7POS)は、回路番号6と8にコンタクトが装備されません。

- 1 MATERIAL: PLUG HOUSING : GLASS FILLED THERMOPLASTIC, 94V-0, BLACK
HOLD HOUSING : PC, 94V-0, ORANGE: 3-
CONTACT : COPPER ALLOY
- 2 FINISH: UNDERPLATE : Ni 1.27μm MIN
CONTACT AREA : Au 0.2μm MIN
- 3 -5(5POS) AND -7(7POS) DO NOT EQUIP WITH CONTACT OF CIRCUIT No. 6 & 8.

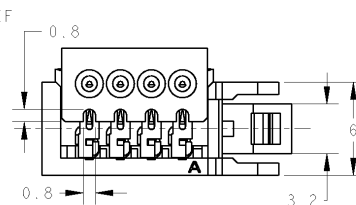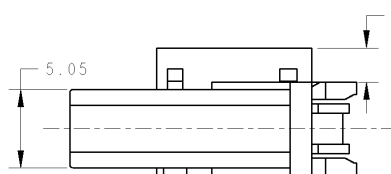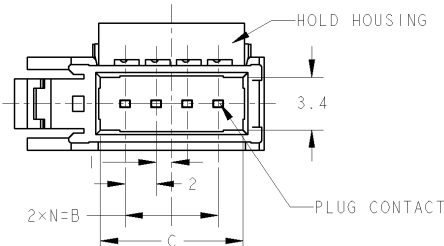

取扱説明書 (Instruction Sheet): 411-78010

ORANGE	20.35	17.2	14	24.1	7	8	3-1473562-8
	20.35	17.2	14	24.1	7	7	3-1473562-7
	16.35	13.2	10	20.1	5	6	3-1473562-6
	16.35	13.2	10	20.1	5	5	3-1473562-5
	12.35	9.2	6	16.1	3	4	3-1473562-4
	10.35	7.2	4	14.1	2	3	3-1473562-3
HOLD HSG COLOR		D	C	B	A	N	POS.
		P/N					

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN S. YOKOZEKI 21 JAN '03		Tyco Electronics AMP K.K. Kawasaki, Japan	
DIMENSIONS: 単位: mm		CHN D. MITSUGI 30 JAN '03		NAME S. MANABE 30 JAN '03	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-5765		SIZE A3	
0 PLC ± 0.2		APPLICATION SPEC 取付用電極		CAGE CODE 00779	
1 PLC ± 3°		WEIGHT -		DRAWING NO. 1473562	
2 PLC ±		RESTRICTED TO -		SHEET 3 OF 3	
3 PLC ±		CUSTOMER DRAWING		REV C	
4 PLC ±					
FINISH #1					
MATERIAL #1 SEE NOTE					
#2 SEE NOTE					

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9