

SIGN	DATE	DESCRIPTION	APPROVER
△	02/27/07	Part No. is changed.	Aaron
△	10/13'11	Operating temperature is changed	ChenMing
△	10/13'11	Remove the "VDE" mark	ChenMing
△	10/13'11	The dimension is changed from 22.85to22.85±0.25	ChenMing
△	10/13'11	The dimension is changed from 18.29 to18.3	ChenMing
△	10/13'11	The dimension is changed from 10.29 to10.3±0.20	ChenMing
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item 1 Insulating body Thermoplastic (UL94V-0)
- Item 2 Contacts PIN PhBz(CuSn) Tin plated

Electrical

- Voltage rating: 300VAC
- Current rating: 2A
- Solid wire(AWG): 18
- Stranded wire(AWG): 18
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- △ ● Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- △ ● Safety Approval: 
- Critical dimension: 

△ TN 06 1 x 00 xxxx G

0 Black
9 White

RoHS compliant
(lead<4%)
In copper Alloy

0000 Standard @ Logo
000A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TN-4.57mm Series 6P Without cover				
PART NO.	TN061X00XXXXG				DWG NO.	8TN0001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
			ChenMing 2011.10.13		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
				SHEET: 01/01	REV.: D	X.XX ±0.10
						X° ±1°





SIGN	DATE	DESCRIPTION	APPROVER
△	08/12`11	Remove "VDE" & Add the P.C.B Layout	Runner
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Terminal body (Contact pin): PhBz
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

△ Electrical cULus


- Voltage rating: 300VAC
- Current rating: 2A
- Wire range:
- Solid wire(AWG): 18
- Stranded wire(AWG): 18
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: 

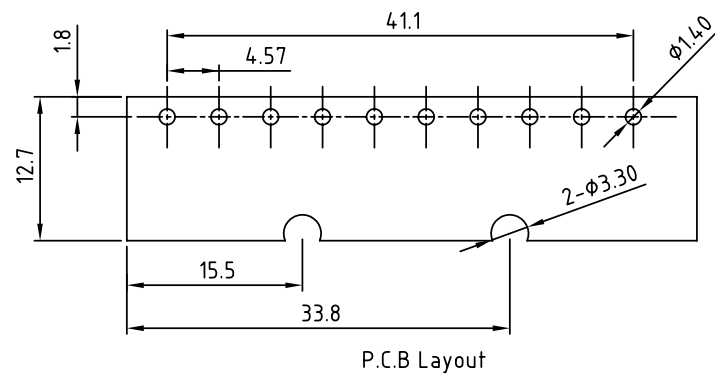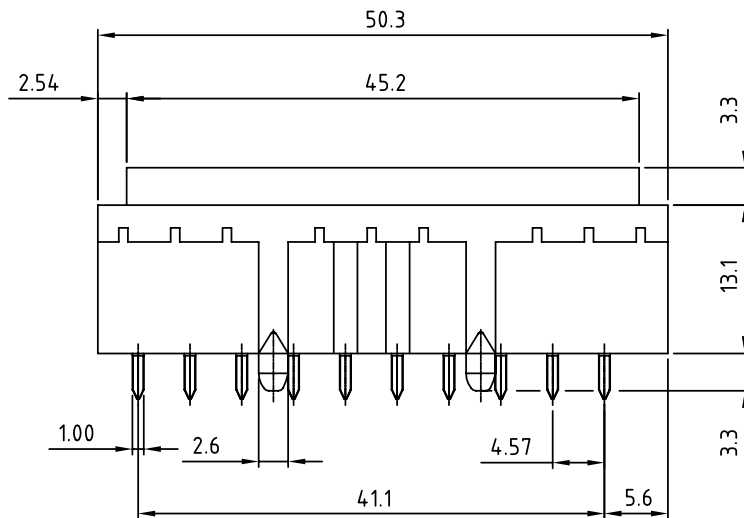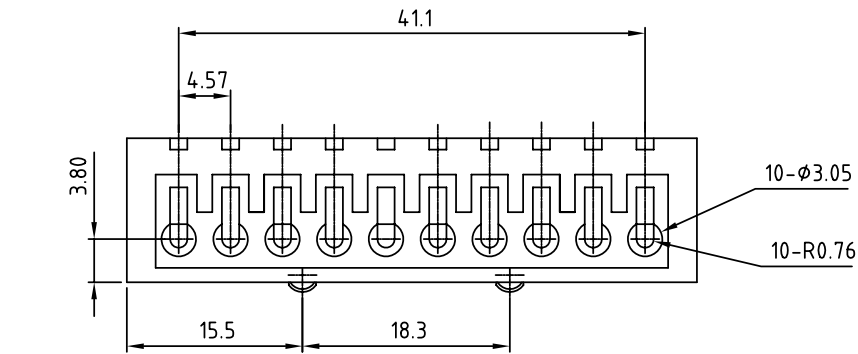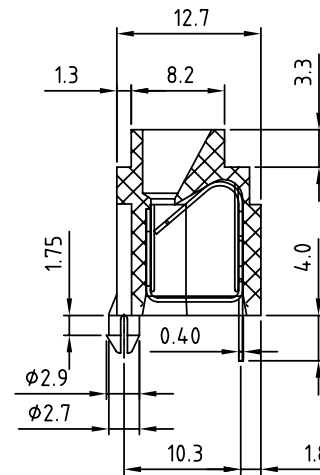

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD


TITLE		TN-4.57mm Series 10P W/o cover			
PART NO.		TN1019000000G		DWG NO.	8TN0004
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Runner 2011.08.16	Marvin 2006.08.21		Tolerance
					X. ±0.50
					X.X ±0.30
					X.XX ±0.10
					X° ±1°
				SHEET: 01/01	REV.: B2




SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material




- Terminal body (Contact pin): PhBz
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus/VDE

- Voltage rating: 300VAC/250VAC
- Current rating: 2A/2A
- Wire range: 0.5-0.75mm²
- Solid wire(AWG): 18
- Stranded wire(AWG): 18
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: 

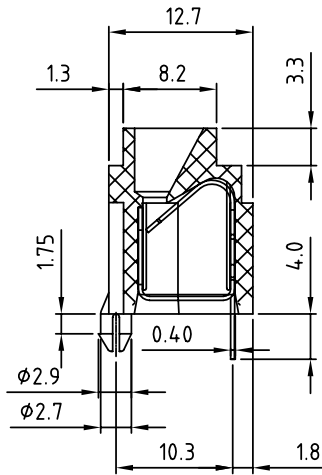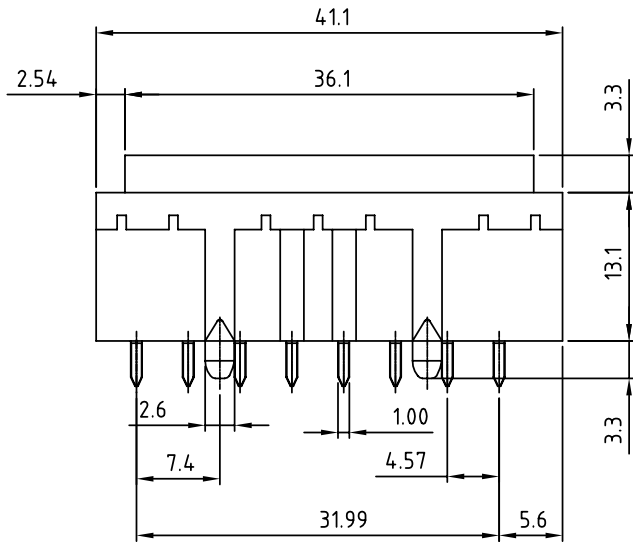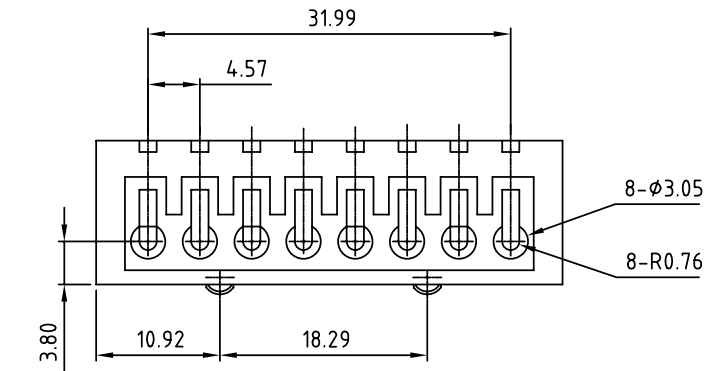

ANYTEK				CUSTOMER COPY			
				ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE	TN-4.57mm Series 8P W/o cover						
PART NO.	TN0819000000G			DWG NO.	8TN0003		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
	Marvin 2008.03.13	Marvin 2006.08.21	Marvin 2006.08.21		UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
					REV.: B		X.XX ±0.10
				SHEET: 01/01		X° ±1°	
5		6			7		

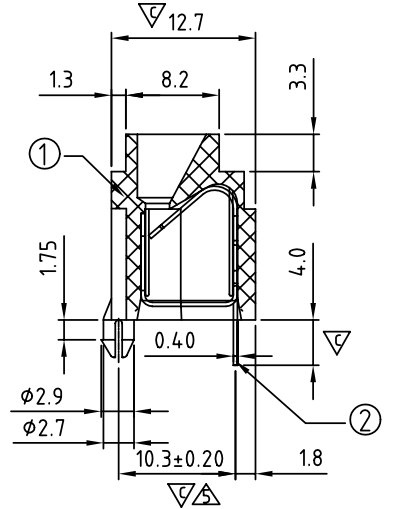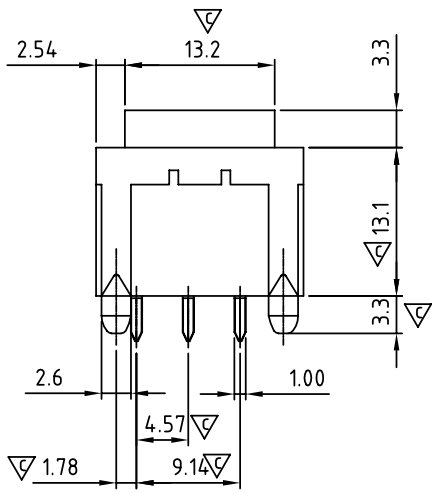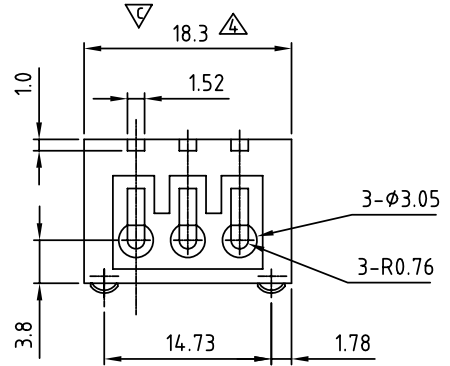

SIGN	DATE	DESCRIPTION	APPROVER
△	02/27/07	Part No. is changed.	Aaron
△	10/13/11	Operating temperature is changed	ChenMing
△	10/13/11	Remove the "VDE" mark	ChenMing
△	10/13/11	The dimension is changed from 18.29 to 18.3	ChenMing
△	10/13/11	The dimension is changed from 10.3 to 10.3±0.20	ChenMing
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item 1 Insulating body Thermoplastic (UL94V-0)
- Item 2 Contacts PIN PhBz(CuSn) Tin plated

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 2A
- Solid wire(AWG): 18
- Stranded wire(AWG): 18
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- △ ● Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- △ ● Safety Approval:
- Critical dimension:

△ TN 03 1 x 0 0 xxxx G

0 Black
9 White
0000 Standard @ Logo
000A Standard ANY Logo
Any special item by customer request, please contact sales department.

RoHS compliant (lead<4%)
In copper Alloy

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TN-4.57mm Series 3P Without cover							
PART NO.		TN031X00XXXXG			DWG NO.	8TN0002			
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance		
				ChenMing 2011.10.13			UNIT: mm	X. ±0.50	
							SCALE: NONE		X.X ±0.30
					SHEET: 01/01		REV.: D		X.XX ±0.10

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9