

## Melf Carbon Film Resistors

# General Type

## Normal & Miniature Style [ MCF Series ]



### INTRODUCTION


The MCF Series Melf Carbon Film Resistors are manufactured by coating a homogeneous film of pure carbon on high grade ceramic rods. SMD enabled structure. The resistors are coated with layers of lacquer.

### FEATURES

|                      |                                  |
|----------------------|----------------------------------|
| Power Rating         | 1/6W, 1/4W, 0.4W, 1/2W, 0.6W, 1W |
| Resistance Tolerance | ±2%, ±5%                         |
| T.C.R.               | see Table I                      |

### DERATING CURVE

For resistors operated in ambient temperatures above 70°C, power rating must be derated in accordance with the curve below.

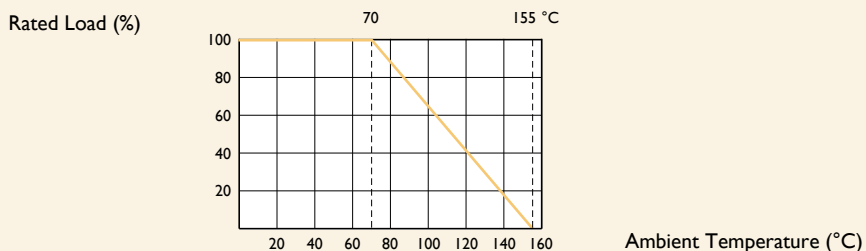


### TABLE I TEMPERATURE COEFFICIENT

| STYLE                                  | MAX. VALUE OF TEMP. COEFFICIENT PPM/°C |            |             |             |
|--|--|------------|-------------|-------------|
|  | under 1KΩ                              | 1K1Ω -47KΩ | 51KΩ -470KΩ | 510KΩ -1MΩ  |
| MCF-12, MCF25S, MCF204                 | 0 to -350                              | 0 to -600  | 0 to -1,000 | 0 to -1,500 |
| MCF-25, MCF50S, MCF207, MCF-50, MCF1WS | 0 to -350                              | 0 to -600  | 0 to -1,000 |             |

### DIMENSIONS

Unit: mm



| STYLE  | DIMENSION       | DIMENSION |           |        |
|--------|-----------------|-----------|-----------|--------|
|        |                 | Normal    | Miniature | C Min. |
| MCF-12 | MCF25S / MCF204 | 3.5±0.2   | 1.4±0.15  | 0.5    |
| MCF-25 | MCF50S / MCF207 | 5.9±0.2   | 2.2±0.1   | 0.5    |
| MCF-50 | MCF1WS          | 8.5±0.2   | 3.2±0.2   | 0.5    |

Note:

---



---



---



---



---



---

### ELECTRICAL CHARACTERISTICS

| STYLE                       | MCF-12                              | MCF25S | MCF204 | MCF-25 | MCF50S | MCF207 | MCF-50 | MCFIWS |
|-----------------------------|-------------------------------------|--------|--------|--------|--------|--------|--------|--------|
| Power Rating at 70°C        | 1/6W                                | 1/4W   | 0.4W   | 1/4W   | 1/2W   | 0.6W   | 1/2W   | 1W     |
| Maximum Working Voltage     | 200V                                | 250V   |        | 300V   |        |        | 350V   |        |
| Maximum Overload Voltage    | 400V                                | 500V   |        | 600V   |        |        | 700V   |        |
| Voltage Proof on Insulation | 200V                                |        |        | 500V   |        |        | 700V   |        |
| Resistance Range            | 10Ω - 1MΩ & 0Ω for E24 series value |        |        |        |        |        |        |        |
| Operating Temp. Range       | -55°C to +155°C                     |        |        |        |        |        |        |        |
| Temperature Coefficient     | see Table I                         |        |        |        |        |        |        |        |

Note: Special value is available on request

### ENVIRONMENTAL CHARACTERISTICS

| PERFORMANCE TEST              | TEST METHOD   | APPRAISE                                  |
|-------------------------------|---|---|
| Short Time Overload           | IEC 60115-1 4.13 2.5 times RCWV for 5 Sec.  | ±1.0%+0.05Ω                               |
| Voltage Proof on Insulation   | IEC 60115-1 4.7 in V-block for 60 Sec., test voltage by type                      | By type                                   |
| Temperature Coefficient       | IEC 60115-1 4.8 -55°C to +155°C   | By type                                   |
| Insulation Resistance         | IEC 60115-1 4.6 in V-block for 60 Sec.  | >10,000MΩ                                 |
| Solderability                 | IEC 60115-1 4.17 235±5°C for 3±0.5 Sec.   | 95% Min. coverage                         |
| Solvent Resistance of Marking | IEC 60115-1 4.30 IPA for 5±0.5 Min. with ultrasonic                               | No deterioration of coatings and markings |
| Periodic-pulse Overload       | IEC 60115-1 4.39 4 times RCWV 10,000 cycles (1 Sec. on, 25 Sec. off)              | ±1.0%+0.05Ω                               |
| Damp Heat Steady State        | IEC 60115-1 4.24 40±2°C, 90-95% RH for 56 days, loaded with 0.1 times RCWV        | ±5.0%+0.1Ω                                |
| Endurance at 70°C             | IEC 60115-1 4.25 70±2°C at RCWV for 1,000 Hr. (1.5 Hr. on, 0.5 Hr. off)           | ±3.0%+0.1Ω                                |
| Temperature Cycling           | IEC 60115-1 4.19 -55°C ⇄ Room Temp. ⇄ +155°C ⇄ Room Temp. (5 cycles)              | ±0.75%+0.05Ω                              |
| Resistance to Soldering Heat  | IEC 60115-1 4.18 260±3°C for 10±1 Sec., immersed to a point 3±0.5mm from the body | ±1.0%+0.05Ω                               |

Note: RCWV(Rated Continuous Working Voltage) =  $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$  or Max. working voltage listed above, whichever less.



## EXPLANATIONS OF ORDERING CODE

| <b>MFR</b>                                    | <b>-12</b>   | <b>F</b>   | <b>T</b>  | <b>F</b>  | <b>52-</b>  | <b>100R</b>  |
|---|--|--|---|---|---|--|
| Code 1 - 3<br><b>Series Name</b><br>See Index | Code 4 - 6<br><b>Power Rating</b><br>-05 = $\varnothing$ d0.5mm<br>-06 = $\varnothing$ d0.6mm<br>-07 = $\varnothing$ d0.7mm<br>-08 = $\varnothing$ d0.8mm<br>-10 = $\varnothing$ d1.0mm<br>-14 = $\varnothing$ d1.4mm<br>-12 = 1/6W<br>-25 = 1/4W<br>25S = 1/4WS<br>-50 = 1/2W<br>50S = 1/2WS<br>100 = 1W<br>1WS = 1WS<br>200 = 2W<br>2WS = 2WS<br>204 = 0.4W<br>207 = 0.6W<br>300 = 3W<br>3WS = 3WS<br>3WM = 3WM<br>400 = 4W<br>500 = 5W<br>5WS = 5WS<br>5SS = 5WSS<br>700 = 7W<br>7WS = 7WS<br>10A = 10W<br>20A = 20W<br>30A = 30W<br>40A = 40W<br>50A = 50W<br>10S = 10WS<br>15A = 15W<br>25A = 25W<br>10B = 100W<br>25B = 250W | Code 7<br><b>Tolerance</b><br>P = $\pm 0.02$ %<br>A = $\pm 0.05$ %<br>B = $\pm 0.1$ %<br>C = $\pm 0.25$ %<br>D = $\pm 0.5$ %<br>F = $\pm 1$ %<br>G = $\pm 2$ %<br>J = $\pm 5$ %<br>K = $\pm 10$ %<br>- = Base on Spec. | Code 8<br><b>Packing Style</b><br>T = Tape/Box<br>R = Tape/Reel<br>B = Bulk | Code 9<br><b>Temperature Coefficient of Resistance</b><br>- = Base on Spec.<br>A = $\pm 5$ ppm/ $^{\circ}$ C<br>B = $\pm 10$ ppm/ $^{\circ}$ C<br>C = $\pm 15$ ppm/ $^{\circ}$ C<br>S = $\pm 20$ ppm/ $^{\circ}$ C<br>D = $\pm 25$ ppm/ $^{\circ}$ C<br>E = $\pm 50$ ppm/ $^{\circ}$ C<br>F = $\pm 100$ ppm/ $^{\circ}$ C<br>G = $\pm 200$ ppm/ $^{\circ}$ C<br>H = $\pm 250$ ppm/ $^{\circ}$ C<br>I = $\pm 300$ ppm/ $^{\circ}$ C<br>J = $\pm 350$ ppm/ $^{\circ}$ C | Code 10 - 12<br><b>Forming Type</b><br>26- = 26mm<br>52- = 52.4mm<br>73- = 73mm<br>81- = 81mm<br>91- = 91mm<br>F = F Type<br>FK = FK Type<br>FKK = FKK Type<br>FFK = F-form Kink<br>M = M-Type Forming<br>MB = M-form W/flat<br>MT = MT Type Forming<br>MR = MR Type<br>AV = AVIsert<br>PN = PANAsert | Code 13 - 17<br><b>Resistance Value</b><br>0R1 = 0.1<br>100R = 100<br>10K = 10,000<br>10M = 10,000,000 |

### EXCEPTION:

#### • Cement series:

<Code 8>: Special packing style code

B: Bulk with wirewound or metal oxide sub-assembly for resistance value

W: Bulk with ceramic based wirewound sub-assembly for resistance value

M: Bulk with metal oxide sub-assembly for resistance value

F: Bulk with Fiberglass based wirewound sub-assembly for resistance value

<Code 10-12>: Without forming code

Example: **SQP500JB-10R**

#### • JPW series:

<Code 13-17>: without resistance value code

Example: **JPW-06-T-52-**

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9