

SMT/QuickGrip Connectors


Product Facts

- Solderless Cable Termination
- 3.0 [.118] Mated Height
- Excellent Cable Retention
- Usable With Flexible and Semi-Rigid Micro-Coaxial Cables
- Tape and Reel Packaging

Tyco Electronics revolutionary SMT/QuickGrip product line is designed to meet the growing demand for a reliable, low cost system for direct termination of coax to a printed circuit board (PCB). SMT/QuickGrip technology eliminates the requirement to connectorize the coaxial cable, reducing assembly times and, therefore, cost. The SMT/QuickGrip surface mount device occupies less PCB area than conventional through hole coaxial connectors. An innovative microstrip mounting pattern and cable receptacle design ensures excellent grounding and PCB retention. The SMT/QuickGrip cable termination system stands a mere 3.0 [.118] off the board when mated, allowing for closer pitch/spacing when designing a

system. The SMT/QuickGrip design provides optimal cable retention for applications where shock, vibration, and/or cable flexure may be encountered. This unique RF design accepts both flexible and semi-rigid micro-coaxial cables while delivering exceptional RF performance up to 3GHz.



These features make this system extremely versatile for design engineers and offer a reliable, cost effective alternative to direct soldering of cable to the PCB. The cable is inserted into the device by means of a simple self-aligning hand tool, eliminating the requirement for skilled personnel. This system removes the possibility of damaged PCBs and cables which are common quality issues associated with direct solder, while providing superior RF performance. The SMT/QuickGrip accommodates multiple cable insertions allowing easy replacement of cables for repairs. This receptacle is designed for high volume assembly using surface mount technology and is available in tape and reel packaging for pick and place board assembly. Pre-stripped cables and inter-

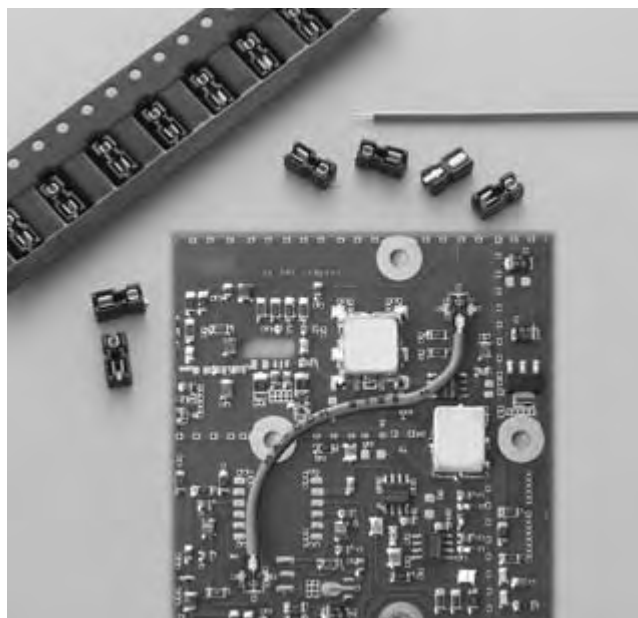

series cable pigtails are available as turnkey solutions for your application needs (i.e.: for use in multi-board applications, for connecting antennas to the PCB, or point to point transmission on the same PCB).

The SMT/QuickGrip cable termination system is ideal for wireless surface mount applications in handsets, pagers and personal digital assistants (PDA). The SMT/QuickGrip

mechanical and electrical performance, coupled with its ease of use, ensure it to be a high quality, reliable solution for current and future interconnect needs. Tyco Electronics is an ISO9001 certified manufacturer and maintains an SPC controlled manufacturing environment. Please call your local Sales or Distribution office for additional information and qualification samples today.

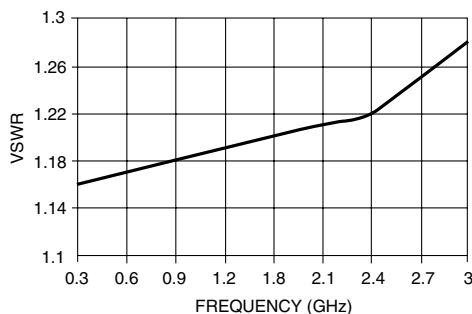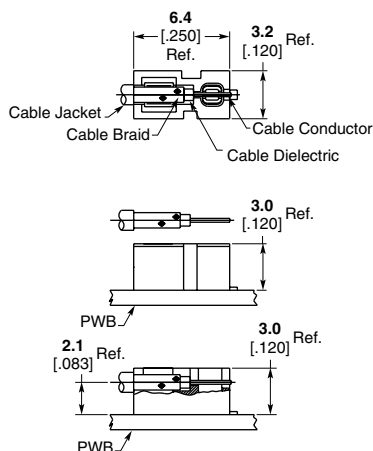

Typical VSWR using SMT/QuickGrip with Omni-Flex 200 Cable

Omni-Flex 200 cable is a Tyco Electronics specified cable.

SMT/QuickGrip Connectors (Continued)

Specifications

General

Materials

Housing:	Polyphenylene Sulfide (PPS)
Contacts:	Copper Alloy

Finishes

Contacts:	Gold Plate over Nickel
-----------	------------------------

Electrical

Frequency Range:	DC - 3GHz
Impedance:	Usable with 50 & 75 Ohm systems
Insertion Loss:	.08 $\sqrt{f}$ GHz
DWV:	750 VRMs
VSWR:	1.3:1 @ 3GHz (Omni-Flex 200 and .047 [.002] Semi-Rigid) 1.4:1 @ 3GHz (.034 [.001] Semi-Rigid)

Mechanical

Connector Durability:	5 mating cycles min. (receptacle only)
Tape and Reel Packaging:	16 [.629] per EIA-481
Force to Disengage by Cam-Out (grams):	Omni-Flex 200 Cable - 543 typical .034 [.001] Semi-Rigid - 852 typical .047 [.002] Semi-Rigid - 1066 typical

Environmental


Temperature Rating:	-40°C(-40°F) to 125°C(257°F) when mated with Omni-Flex 200 Cable
Resistance to Solder Heat:	Infrared, convection, and vapor phase solderable (receptacle only). Maximum reflow time/temperature not to exceed 260°C for 3 minutes.

Cable Information


Materials:	Omni-Flex 200 Cable
Jacket:	FEP Flexible Cable (200°C)
Shield:	Fluorinated Ethylene Propylene
Dielectric:	Silver plated copper wire, 44 AWG, 90% min. coverage
Center Conductor:	PTFE (Polytetrafluoroethylene)
Center Conductor:	Silver Plated Copper Clad Steel, 30 AWG
Minimum Bend Radius:	6.35 [.250]
Insertion Loss (PVC and FEP cable only):	1.3dB/m, 0.4 dB/ft. @ 500 MHz 2.0dB/m, 0.5 dB/ft. @ 1 GHz 3.0dB/m, 0.9 dB/ft. @ 2 GHz
Center Conductor Resistance:	.26 Ohms per foot average

Strip Dimensions

Tyco Electronics Omni-Flex 200 Cable Part Number 1407578-1



Semi-Rigid Cable (.034 and .047)





Omni-Flex 200 cable is a
Tyco Electronics specified cable.

Note: Part Numbers are RoHS compliant except: ♦ Indicates non-RoHS compliant.

SMT/QuickGrip Connectors (Continued)

PC Board Mount Receptacle

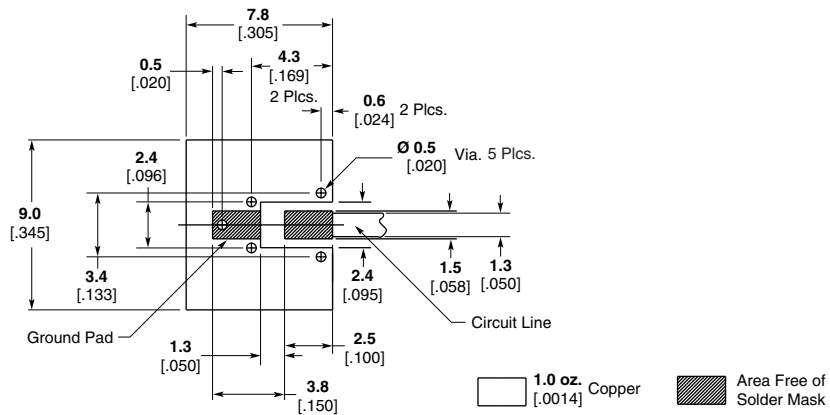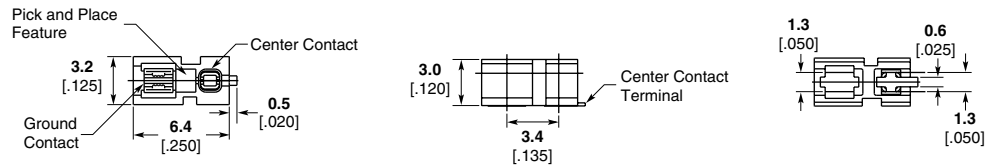

Recommended Mounting Pattern for Microstrip Line

Description	Part No.
Bulk Packaged 100/bag	1085456-1
700 Piece Reel	1086008-1
2000 Piece Reel	1086009-1

1. Printed wiring board material: glass epoxy FR-4 or similar, relative permittivity: 4.8, 1 oz. copper clad both sides.
2. These dimensions valid for 1.6 [.062] board thickness.

Cable Insertion Tool



Part No.
1088313-1


Note: Part Numbers are RoHS compliant except: ♦ Indicates non-RoHS compliant.

SMT/QuickGrip Connectors (Continued)

Inter-Series Cable Assemblies



SMA Straight Plug

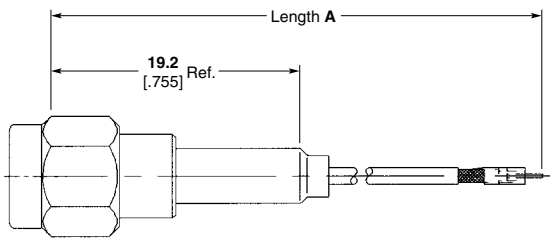


Cable	Assembly Length (A)	Part No.
Omni-Flex 200	100 [4]	1329174-1
	200 [8]	1329174-2
	305 [12]	1310432-1

Note:

1. Cable length tolerances: Length 'A' mm [In], Tolerance mm [In],
50 to 100 [3.94], ± 3 [$\pm .12$], 101 to 500 [3.98 to 19.69], ± 5 [$\pm .20$],
Over 500 [19.69], ± 10 [$\pm .39$]

SMA Bulkhead Jack

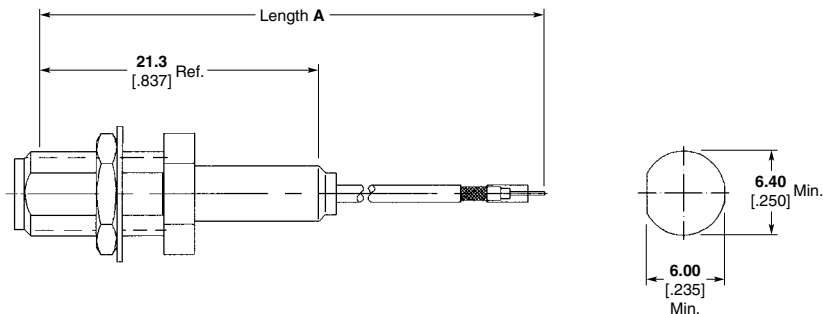

**Recommended
Mounting Hole**

Cable	Assembly Length (A)	Part No.
Omni-Flex 200	100 [4]	1329175-1
	200 [8]	1329175-2
	305 [12]	1329175-3

Note:

1. Cable length tolerances: Length 'A' mm [In], Tolerance mm [In],
50 to 100 [3.94], ± 3 [$\pm .12$], 101 to 500 [3.98 to 19.69], ± 5 [$\pm .20$],
Over 500 [19.69], ± 10 [$\pm .39$]


Omni-Flex 200 cable is a
Tyco Electronics specified cable.

Note: Part Numbers are RoHS compliant except: ♦ Indicates non-RoHS compliant.

SMT/QuickGrip Connectors (Continued)

Inter-Series Cable Assemblies (Continued)

SMB Bulkhead Jack

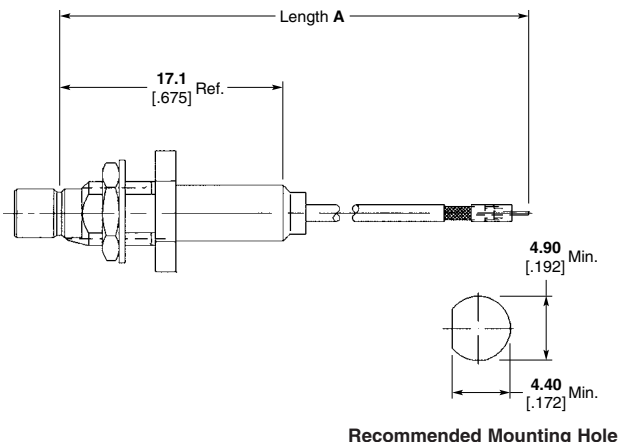


Cable	Assembly Length (A)	Part No.
Omni-Flex 200	100 [4]	1408050-4
	200 [8]	1408050-5
	305 [12]	1408050-6

Note:

- Cable length tolerances: Length 'A' mm [In], Tolerance mm [In], 50 to 100 [3.94], ± 3 [$\pm .12$], 101 to 500 [3.98 to 19.69], ± 5 [$\pm .20$], Over 500 [19.69], ± 10 [$\pm .39$]

SMB Right-Angle Plug

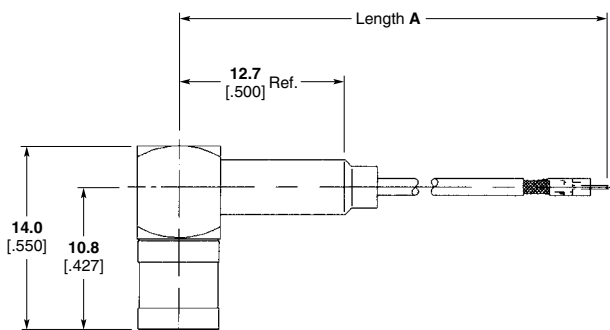


Cable	Assembly Length (A)	Part No.
Omni-Flex 200	100 [4]	1255378-4
	200 [8]	1255378-5
	305 [12]	1255378-6

Note:

- Cable length tolerances: Length 'A' mm [In], Tolerance mm [In], 50 to 100 [3.94], ± 3 [$\pm .12$], 101 to 500 [3.98 to 19.69], ± 5 [$\pm .20$], Over 500 [19.69], ± 10 [$\pm .39$]

MCX Bulkhead Jack

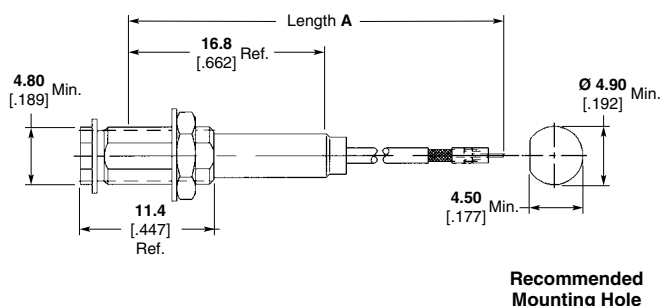


Cable	Assembly Length (A)	Part No.
Omni-Flex 200	100 [4]	1408051-4
	200 [8]	1408051-5
	305 [12]	1408051-6

Note:

- Cable length tolerances: Length 'A' mm [In], Tolerance mm [In], 50 to 100 [3.94], ± 3 [$\pm .12$], 101 to 500 [3.98 to 19.69], ± 5 [$\pm .20$], Over 500 [19.69], ± 10 [$\pm .39$]

MCX Right-Angle Plug

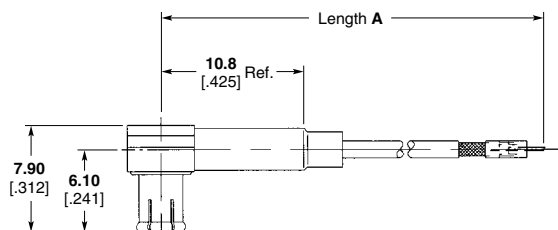

Cable	Assembly Length (A)	Part No.
Omni-Flex 200	100 [4]	1330401-4
	200 [8]	1330401-5
	305 [12]	1330401-6

Note:

- Cable length tolerances: Length 'A' mm [In], Tolerance mm [In], 50 to 100 [3.94], ± 3 [$\pm .12$], 101 to 500 [3.98 to 19.69], ± 5 [$\pm .20$], Over 500 [19.69], ± 10 [$\pm .39$]

Omni-Flex 200 cable is a Tyco Electronics specified cable.

Note: Part Numbers are RoHS compliant except: ♦ Indicates non-RoHS compliant.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9