

POWER

ADO300 Series

300 Watt 1/8 Brick DC-DC Converter

Data Sheet

Total Power: 300 Watts
(11.77 V @ 26 A)
(5 V @ 60 A)
(3.3 V @ 60 A)

Input Voltage: 36 - 75 Vdc

Single Output: 12 V, 5 V, 3.3 V



**DIGITAL
DC DC**

SPECIAL FEATURES

- 300 W continuous power
- Ultra high efficiency
- 36 - 75 Vdc Telecom input range
- Baseplate version for contact cooling or heatsink mounting
- Parallel and Droop current sharing
- Remote output sense
- Fully regulated output voltage
- No minimum load requirement
- Remote control function
- Low ripple and noise
- Fixed switching frequency
- High capacitive load capability
- Pre-bias start-up capability
- Excellent thermal performance
- High reliability
- RoHS 6 compliant
- UL94 V-0 materials
- Two-year warranty (consult factory for extended terms)

SAFETY

- EN62368
- CSA
- CE
- UL



Electrical Specifications

| Input | 12 V | 5 V | 3.3 V |
|---|--|------------------|------------------|
| Input voltage | 36 - 75 Vdc | | |
| Input surge | 95 V / 100 mSec | | |
| Input UVLO (typical) | Turn-on: 34 Vdc Turn-off: 32 Vdc Hysteresis: 2 Vdc | | |
| Efficiency | 95.5% (60% load) | 95.2% (50% load) | 93.7% (50% load) |
| I/O insulation | Basic insulation | | |
| I/O isolation | 1500 Vdc | | |
| Output | 12 V | 5 V | 3.3 V |
| Output voltage (Vin = 48 V) | 11.82 V | 5 V | 3.3 V |
| Output current maximum | 26 A | 60 A | 60A |
| Noise & ripple | 70 mV pk-pk typ. | 50 mV pk-pk typ. | 20 mV pk-pk typ. |
| Overtemperature protection | Baseplate: 110 °C typ. Open frame: 125 °C hot spot typ. | | |
| Overvoltage protection method / OCP operation | 115%-150% rated output voltage/hiccup and auto restart | | |
| Overcurrent protection method / OCP operation | 110%-150% rated output current /hiccup and auto restart | | |
| Control | 12 V | 5 V | 3.3 V |
| Enable | TTL compatible (negative logic) | | |
| Switching frequency | 150 KHz fixed frequency | | |
| Pre-bias start-up | 0% - 90% Vout | | |
| Parallel connection & droop share | Droop share | | |

Pin Assignments

| Pin # | Name | Function | Optional |
|-------|---------------|--------------------------|----------|
| 1 | +Vin | Positive input voltage | |
| 2 | Remote On/Off | Remote control | |
| 3 | -Vin | Negative input voltage | |
| 4 | -Vo | Negative output voltage | |
| 5 | -Sense | Remote sense negative | Yes |
| 6 | Trim/C1 | Voltage adjustment | Yes |
| 7 | +Sense | Remote sense positive | Yes |
| 8 | +Vo | Positive output voltages | |
| 9 | C2 | Digital | Yes |
| 10 | Sig_Gnd | Digital | Yes |
| 11 | Data | Digital | Yes |
| 12 | SMBAlert | Digital | Yes |
| 13 | Clock | Digital | Yes |
| 14 | Addr1 | Digital | Yes |
| 15 | Addr0 | Digital | Yes |


Pin Length Options

| Device code suffix | Pin Length |
|--------------------|------------------|
| -4 | 4.6 mm ± 0.25 mm |
| -6 | 3.8 mm ± 0.25 mm |
| -8 | 2.8 mm ± 0.25 mm |
| None | 5.8 mm ± 0.25 mm |


Environmental Specifications

| | |
|-----------------------|-------------------|
| Operating temperature | -40 to +85 °C |
| Storage temperature | -55 to +125 °C |
| MTBF | 1.5 million hours |

ADO300-48S12-6LI
Mechanical Drawing - Open Frame Module

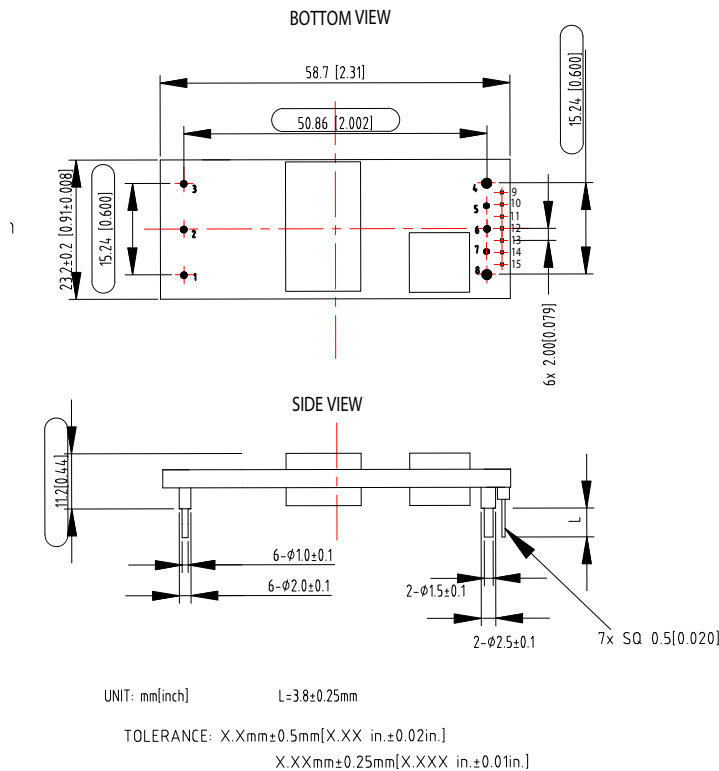

ADO300-48S12B-6LI
Mechanical Drawing - Baseplate

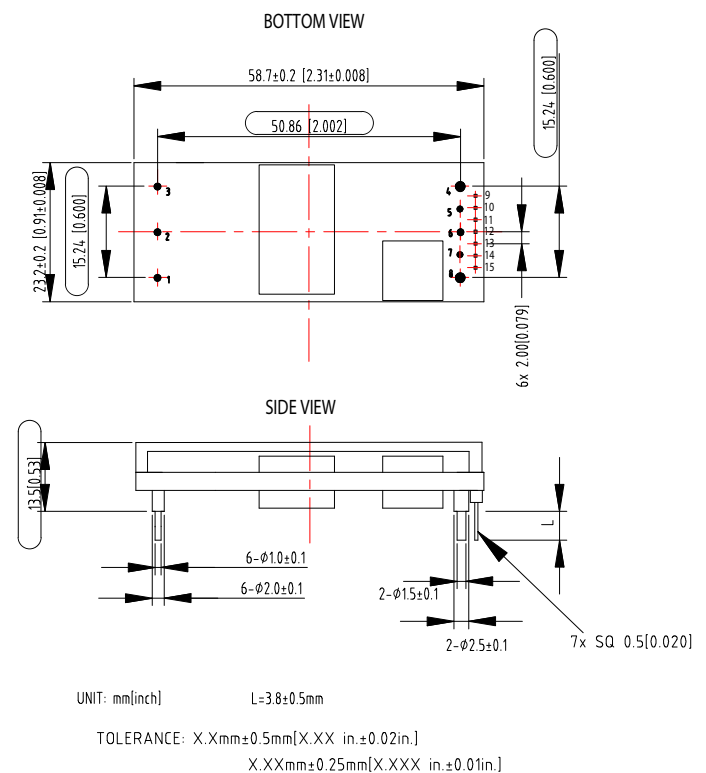

Notes:

1. Dimensions within the box are critical dimensions.
2. No pin 9-15 for ADO300-48S12B-6LI; ADO300-48S12-6LI with pin 9-15.
3. Different output voltage ADO300 products have slight differences in the mechanical drawing. Please check the specified product's Technical Reference Note for more details.
4. All specifications are subject to change without notice. Mechanical drawings are for reference only.

Ordering Information

| Model number | Input voltage | Output voltage set point | Output current | Efficiency |
|--------------------|---------------|--------------------------|----------------|-------------------|
| ADO300-48S12-6L | 36 - 75 Vdc | 11.77 Vdc | 26 A | 95.2% (full load) |
| ADO300-48S12B-6L | 36 - 75 Vdc | 11.77 Vdc | 26 A | 95.2% (full load) |
| ADO300-48S12-6LI | 36 - 75 Vdc | 11.77 Vdc | 26 A | 95.2% (full load) |
| ADO300-48S12B-6LI | 36 - 75 Vdc | 11.77 Vdc | 26 A | 95.2% (full load) |
| ADO300-48S05-6L | 36 - 75 Vdc | 5.0 Vdc | 60 A | 94.6% (full load) |
| ADO300-48S05-6LI | 36 - 75 Vdc | 5.0 Vdc | 60 A | 94.6% (full load) |
| ADO300-48S05B-6L | 36 - 75 Vdc | 5.0 Vdc | 60 A | 94.6% (full load) |
| ADO300-48S05B-6LI | 36 - 75 Vdc | 5.0 Vdc | 60 A | 94.6% (full load) |
| ADO300-48S05PB-6L | 36 - 75 Vdc | 5.0 Vdc | 60 A | 94.6% (full load) |
| ADO300-48S3V3-6L | 36 - 75 Vdc | 3.3 Vdc | 60 A | 93% (full load) |
| ADO300-48S3V3-6LI | 36 - 75 Vdc | 3.3 Vdc | 60 A | 93% (full load) |
| ADO300-48S3V3B-6L | 36 - 75 Vdc | 3.3 Vdc | 60 A | 93% (full load) |
| ADO300-48S3V3B-6LI | 36 - 75 Vdc | 3.3 Vdc | 60 A | 93% (full load) |

Default = Negative remote control

P = Positive remote control

B = Baseplate

-6 = 3.8 mm pin length

I = PMBus interface version

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333



www.artesyn.com

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2017 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com/power
For support: productsupport.ep@artesyn.com

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9