

100-Pin TQFP  
Commercial Temp  
Industrial Temp

1M x 18, 512K x 32, 512K x 36  
18Mb Sync Burst SRAMs

333 MHz–150 MHz  
1.8 V or 2.5 V  $V_{DD}$   
1.8 V or 2.5 V I/O

## Features

- $\overline{FT}$  pin for user-configurable flow through or pipeline operation
- Single Dual Cycle Deselect (SDCD) operation
- 1.8 V or 2.5 V core power supply
- 1.8 V or 2.5 V I/O supply
- $\overline{LBO}$  pin for Linear or Interleaved Burst mode
- Internal input resistors on mode pins allow floating mode pins
- Byte Write ( $\overline{BW}$ ) and/or Global Write ( $\overline{GW}$ ) operation
- Internal self-timed write cycle
- Automatic power-down for portable applications
- RoHS-compliant 100-lead TQFP package available

## Functional Description

### Applications

The GS8160E18/32/36DGT-xxxV is an 18,874,368-bit high performance synchronous SRAM with a 2-bit burst address counter. Although of a type originally developed for Level 2 Cache applications supporting high performance CPUs, the device now finds application in synchronous SRAM applications, ranging from DSP main store to networking chip set support.

### Controls

Addresses, data I/Os, chip enables ( $\overline{E1}$ ,  $E2$ ,  $\overline{E3}$ ), address burst control inputs ( $\overline{ADSP}$ ,  $\overline{ADSC}$ ,  $\overline{ADV}$ ), and write control inputs ( $\overline{Bx}$ ,  $\overline{BW}$ ,  $\overline{GW}$ ) are synchronous and are controlled by a positive-edge-triggered clock input (CK). Output enable ( $\overline{G}$ ) and power down control (ZZ) are asynchronous inputs. Burst cycles can be initiated with either  $\overline{ADSP}$  or  $\overline{ADSC}$  inputs. In Burst mode, subsequent burst addresses are generated

internally and are controlled by  $\overline{ADV}$ . The burst address counter may be configured to count in either linear or interleave order with the Linear Burst Order ( $\overline{LBO}$ ) input. The Burst function need not be used. New addresses can be loaded on every cycle with no degradation of chip performance.

### DCD Pipelined Reads

The GS8160E18/32/36DGT-xxxV is a DCD (Dual Cycle Deselect) pipelined synchronous SRAM. SCD (Single Cycle Deselect) versions are also available. DCD SRAMs pipeline disable commands to the same degree as read commands. DCD RAMs hold the deselect command for one full cycle and then begin turning off their outputs just after the second rising edge of clock.

### Byte Write and Global Write

Byte write operation is performed by using Byte Write enable ( $\overline{BW}$ ) input combined with one or more individual byte write signals ( $\overline{Bx}$ ). In addition, Global Write ( $\overline{GW}$ ) is available for writing all bytes at one time, regardless of the Byte Write control inputs.

### Sleep Mode

Low power (Sleep mode) is attained through the assertion (High) of the ZZ signal, or by stopping the clock (CK). Memory data is retained during Sleep mode.


### Core and Interface Voltages

The GS8160E18/32/36DGT-xxxV operates on a 1.8 V or 2.5 V power supply. All inputs are 1.8 V or 2.5 V compatible. Separate output power ( $V_{DDQ}$ ) pins are used to decouple output noise from the internal circuits and are 1.8 V or 2.5 V compatible.

## Parameter Synopsis


|                            |                | -333 | -250 | -200 | -150 | Unit |
|----------------------------|----------------|------|------|------|------|------|
| Pipeline<br>3-1-1-1        | $t_{kQ}$       | 3.0  | 3.0  | 3.0  | 3.8  | ns   |
|                            | tCycle         | 3.0  | 4.0  | 5.0  | 6.7  | ns   |
|                            | Curr (x18)     | 305  | 245  | 205  | 175  | mA   |
|                            | Curr (x32/x36) | 360  | 285  | 235  | 195  | mA   |
| Flow<br>Through<br>2-1-1-1 | $t_{kQ}$       | 5.0  | 5.5  | 6.5  | 7.5  | ns   |
|                            | tCycle         | 5.0  | 5.5  | 6.5  | 7.5  | ns   |
|                            | Curr (x18)     | 235  | 215  | 205  | 190  | mA   |
|                            | Curr (x32/x36) | 265  | 245  | 225  | 205  | mA   |

## GS8160E18DGT-xxxV 100-Pin TQFP Pinout

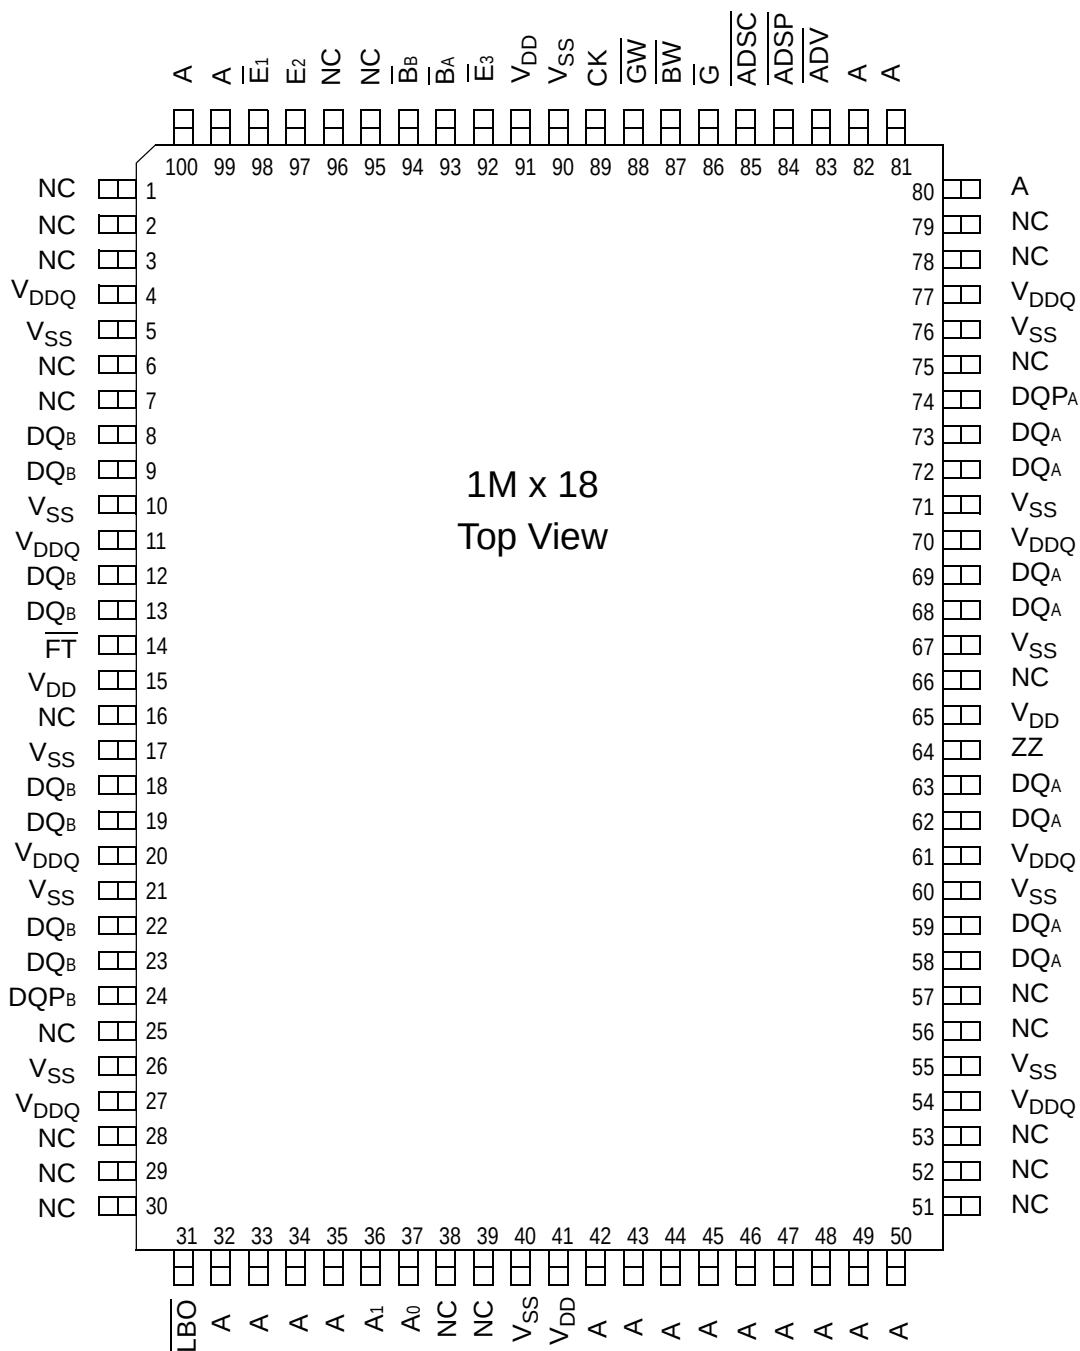
**Note:**

Pins marked with NC can be tied to either  $V_{DD}$  or  $V_{SS}$ . These pins can also be left floating.

## GS8160E32DGT-xxxV 100-Pin TQFP Pinout

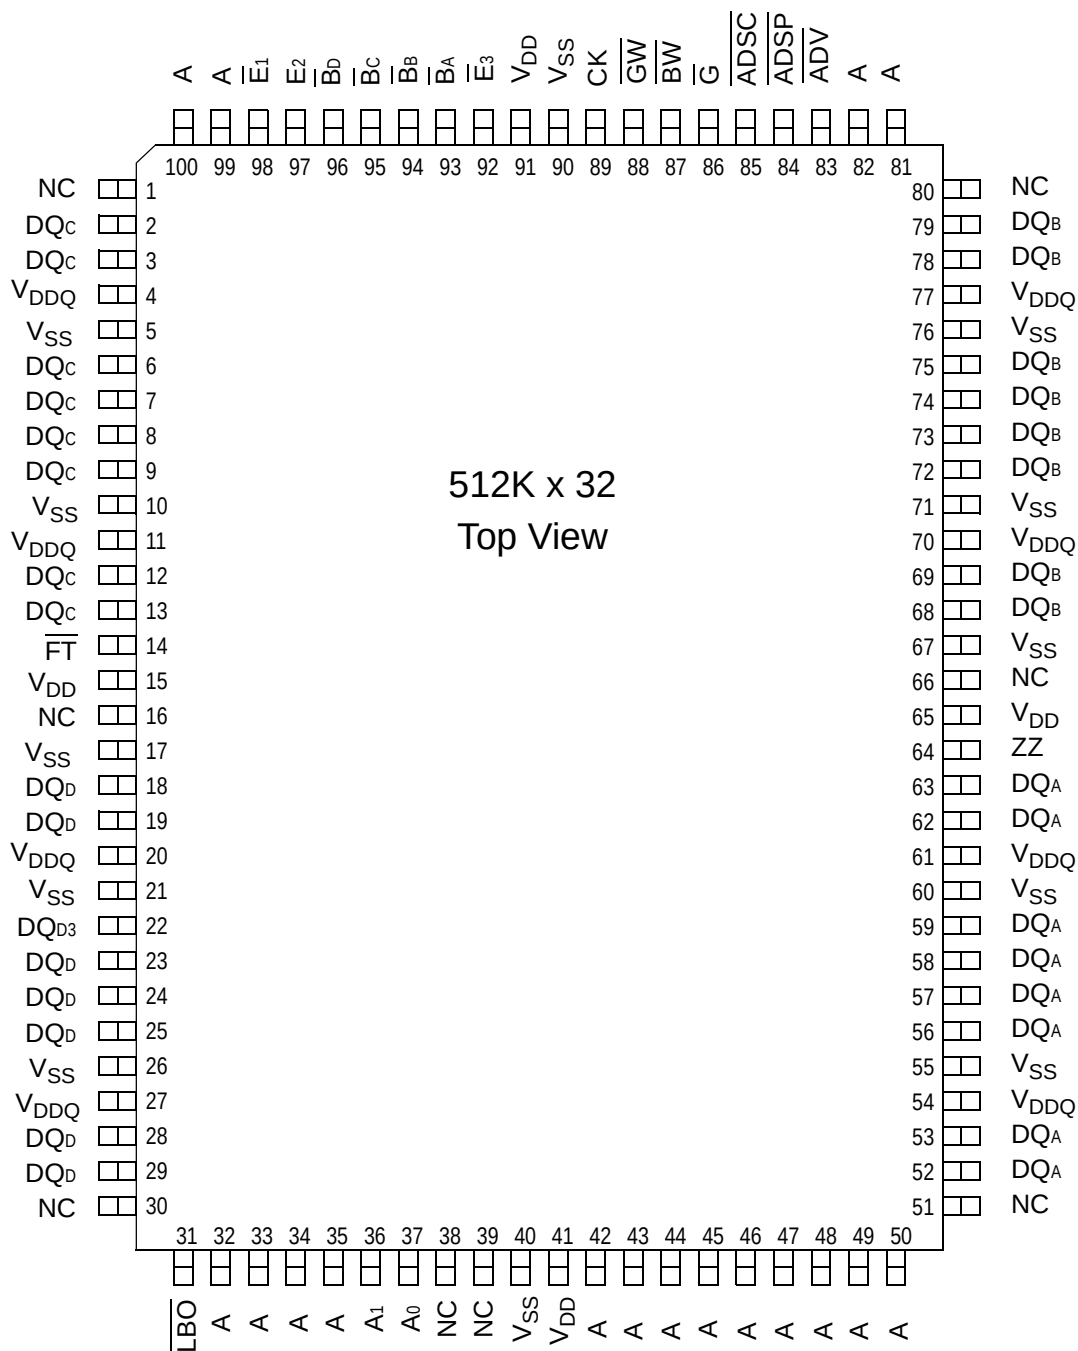
**Note:**

Pins marked with NC can be tied to either  $V_{DD}$  or  $V_{SS}$ . These pins can also be left floating.

512K x 36  
Top View

Pinout details (Top View):


- Left Side (Pins 1-30):** DQ<sub>Pc</sub>, DQ<sub>c</sub>, DQ<sub>c</sub>, V<sub>DDQ</sub>, V<sub>SS</sub>, DQ<sub>c</sub>, DQ<sub>c</sub>, DQ<sub>c</sub>, DQ<sub>c</sub>, V<sub>SS</sub>, V<sub>DDQ</sub>, DQ<sub>c</sub>, DQ<sub>c</sub>, FT, V<sub>DD</sub>, NC, V<sub>SS</sub>, DQ<sub>D</sub>, DQ<sub>D</sub>, V<sub>DDQ</sub>, V<sub>SS</sub>, DQ<sub>D3</sub>, DQ<sub>D</sub>, DQ<sub>D</sub>, DQ<sub>D</sub>, V<sub>SS</sub>, V<sub>DDQ</sub>, DQ<sub>D</sub>, DQ<sub>D</sub>, DQ<sub>Pd</sub>.
- Right Side (Pins 81-51):** DQ<sub>Pb</sub>, DQ<sub>B</sub>, DQ<sub>B</sub>, V<sub>DDQ</sub>, V<sub>SS</sub>, DQ<sub>B</sub>, DQ<sub>B</sub>, DQ<sub>B</sub>, DQ<sub>B</sub>, V<sub>SS</sub>, V<sub>DDQ</sub>, DQ<sub>B</sub>, DQ<sub>B</sub>, V<sub>SS</sub>, NC, V<sub>DD</sub>, ZZ, DQ<sub>A</sub>, DQ<sub>A</sub>, V<sub>DDQ</sub>, V<sub>SS</sub>, DQ<sub>A</sub>, DQ<sub>A</sub>, DQ<sub>A</sub>, DQ<sub>A</sub>, V<sub>SS</sub>, V<sub>DDQ</sub>, DQ<sub>A</sub>, DQ<sub>A</sub>, DQ<sub>PA</sub>.
- Bottom Side (Pins 31-50):** LBO, A, A, A, A, A, A<sub>1</sub>, A<sub>0</sub>, NC, NC, V<sub>SS</sub>, V<sub>DD</sub>, A, A, A, A, A, A, A, A, A.
- Top Side (Pins 100-82):** A, A, E<sub>1</sub>, E<sub>2</sub>, B<sub>D</sub>, B<sub>C</sub>, B<sub>B</sub>, B<sub>A</sub>, E<sub>3</sub>, V<sub>DD</sub>, V<sub>SS</sub>, CK, GW, BW, G, ADSC, ADSP, ADV, A, A.

Pins marked with NC can be tied to either  $V_{DD}$  or  $V_{SS}$ . These pins can also be left floating.

## TQFP Pin Description

| Symbol                                                                   | Type | Description                                                                   |
|--------------------------------------------------------------------------|------|-------------------------------------------------------------------------------|
| A <sub>0</sub> , A <sub>1</sub>                                          | I    | Address field LSBs and Address Counter preset Inputs                          |
| A                                                                        | I    | Address Inputs                                                                |
| DQ <sub>A</sub><br>DQ <sub>B</sub><br>DQ <sub>C</sub><br>DQ <sub>D</sub> | I/O  | Data Input and Output pins                                                    |
| $\overline{BW}$                                                          | I    | Byte Write—Writes all enabled bytes; active low                               |
| $\overline{B_A}$ , $\overline{B_B}$                                      | I    | Byte Write Enable for DQ <sub>A</sub> , DQ <sub>B</sub> Data I/Os; active low |
| $\overline{B_C}$ , $\overline{B_D}$                                      | I    | Byte Write Enable for DQ <sub>C</sub> , DQ <sub>D</sub> Data I/Os; active low |
| CK                                                                       | I    | Clock Input Signal; active high                                               |
| $\overline{GW}$                                                          | I    | Global Write Enable—Writes all bytes; active low                              |
| $\overline{E_1}$ , $\overline{E_3}$                                      | I    | Chip Enable; active low                                                       |
| E <sub>2</sub>                                                           | I    | Chip Enable; active high                                                      |
| $\overline{G}$                                                           | I    | Output Enable; active low                                                     |
| $\overline{ADV}$                                                         | I    | Burst address counter advance enable; active low                              |
| $\overline{ADSP}$ , $\overline{ADSC}$                                    | I    | Address Strobe (Processor, Cache Controller); active low                      |
| ZZ                                                                       | I    | Sleep Mode control; active high                                               |
| $\overline{FT}$                                                          | I    | Flow Through or Pipeline mode; active low                                     |
| $\overline{LBO}$                                                         | I    | Linear Burst Order mode; active low                                           |
| V <sub>DD</sub>                                                          | I    | Core power supply                                                             |
| V <sub>SS</sub>                                                          | I    | I/O and Core Ground                                                           |
| V <sub>DDQ</sub>                                                         | I    | Output driver power supply                                                    |
| NC                                                                       |      | No Connect                                                                    |

## GS8160E18/32/36DGT-xxxV Block Diagram

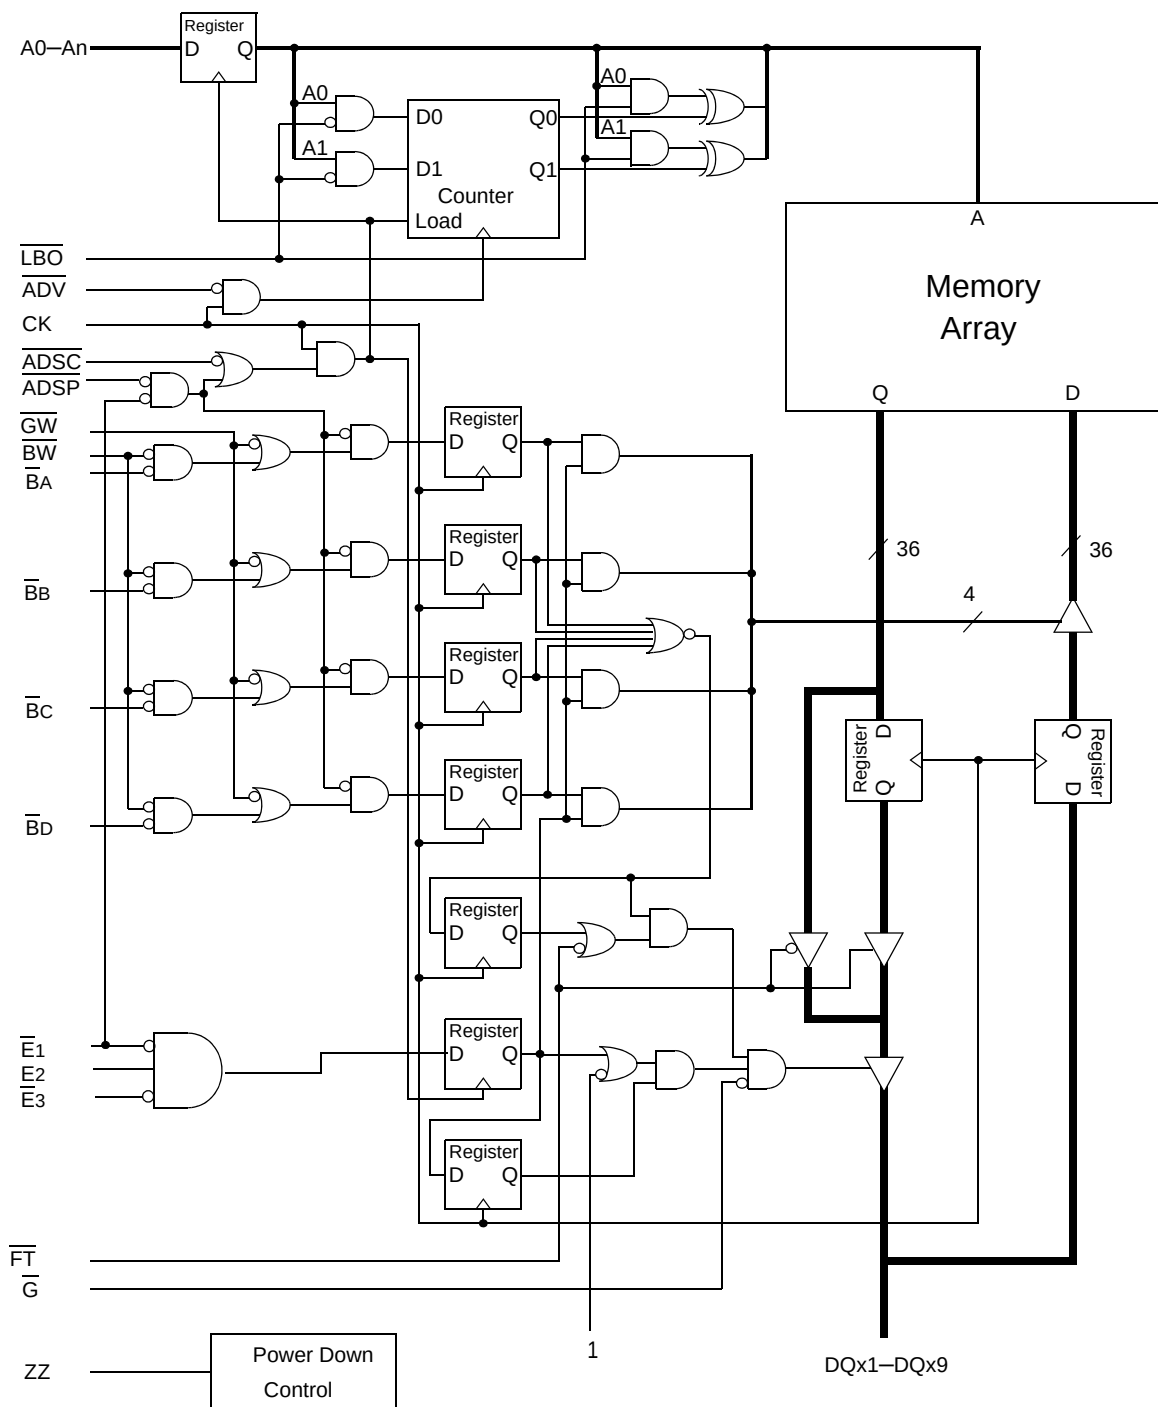

Note: Only x36 version shown for simplicity.

## Mode Pin Functions

| Mode Name               | Pin Name                | State   | Function                   |
|-------------------------|-------------------------|---------|----------------------------|
| Burst Order Control     | $\overline{\text{LBO}}$ | L       | Linear Burst               |
|                         |                         | H       | Interleaved Burst          |
| Output Register Control | $\overline{\text{FT}}$  | L       | Flow Through               |
|                         |                         | H or NC | Pipeline                   |
| Power Down Control      | ZZ                      | L or NC | Active                     |
|                         |                         | H       | Standby, $I_{DD} = I_{SB}$ |

### Note:

There is a pull-up device on the  $\overline{\text{FT}}$  pin and a pull-down device on the ZZ pin, so this input pin can be unconnected and the chip will operate in the default states as specified in the above tables.

## Burst Counter Sequences

### Linear Burst Sequence

|             | A[1:0] | A[1:0] | A[1:0] | A[1:0] |
|-------------|--------|--------|--------|--------|
| 1st address | 00     | 01     | 10     | 11     |
| 2nd address | 01     | 10     | 11     | 00     |
| 3rd address | 10     | 11     | 00     | 01     |
| 4th address | 11     | 00     | 01     | 10     |

### Note:

The burst counter wraps to initial state on the 5th clock.

### Interleaved Burst Sequence

|             | A[1:0] | A[1:0] | A[1:0] | A[1:0] |
|-------------|--------|--------|--------|--------|
| 1st address | 00     | 01     | 10     | 11     |
| 2nd address | 01     | 00     | 11     | 10     |
| 3rd address | 10     | 11     | 00     | 01     |
| 4th address | 11     | 10     | 01     | 00     |

### Note:

The burst counter wraps to initial state on the 5th clock.

Byte Write Truth Table

| Function        | $\overline{GW}$ | $\overline{BW}$ | $\overline{BA}$ | $\overline{BB}$ | $\overline{BC}$ | $\overline{BD}$ | Notes   |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|---------|
| Read            | H               | H               | X               | X               | X               | X               | 1       |
| Write No Bytes  | H               | L               | H               | H               | H               | H               | 1       |
| Write byte a    | H               | L               | L               | H               | H               | H               | 2, 3    |
| Write byte b    | H               | L               | H               | L               | H               | H               | 2, 3    |
| Write byte c    | H               | L               | H               | H               | L               | H               | 2, 3, 4 |
| Write byte d    | H               | L               | H               | H               | H               | L               | 2, 3, 4 |
| Write all bytes | H               | L               | L               | L               | L               | L               | 2, 3, 4 |
| Write all bytes | L               | X               | X               | X               | X               | X               |         |

## Notes:

1. All byte outputs are active in read cycles regardless of the state of Byte Write Enable inputs,  $\overline{BA}$ ,  $\overline{BB}$ ,  $\overline{BC}$  and/or  $\overline{BD}$ .
2. Byte Write Enable inputs  $\overline{BA}$ ,  $\overline{BB}$ ,  $\overline{BC}$  and/or  $\overline{BD}$  may be used in any combination with  $\overline{BW}$  to write single or multiple bytes.
3. All byte I/Os remain High-Z during all write operations regardless of the state of Byte Write Enable inputs.
4. Bytes "c" and "d" are only available on the x32 and x36 versions.


## Synchronous Truth Table

| Operation                          | Address Used | State Diagram Key | $\overline{E}_1$ | E2 | $\overline{E}_3$ | $\overline{ADSP}$ | $\overline{ADSC}$ | $\overline{ADV}$ | $\overline{W}$ | DQ <sup>3</sup> |
|------------------------------------|--------------|-------------------|------------------|----|------------------|-------------------|-------------------|------------------|----------------|-----------------|
| Deselect Cycle, Power Down         | None         | X                 | L                | X  | H                | X                 | L                 | X                | X              | High-Z          |
| Deselect Cycle, Power Down         | None         | X                 | L                | L  | X                | X                 | L                 | X                | X              | High-Z          |
| Deselect Cycle, Power Down         | None         | X                 | L                | X  | H                | L                 | X                 | X                | X              | High-Z          |
| Deselect Cycle, Power Down         | None         | X                 | L                | L  | X                | L                 | X                 | X                | X              | High-Z          |
| Deselect Cycle, Power Down         | None         | X                 | H                | X  | X                | X                 | L                 | X                | X              | High-Z          |
| Read Cycle, Begin Burst            | External     | R                 | L                | H  | L                | L                 | X                 | X                | X              | Q               |
| Read Cycle, Begin Burst            | External     | R                 | L                | H  | L                | H                 | L                 | X                | F              | Q               |
| Write Cycle, Begin Burst           | External     | W                 | L                | H  | L                | H                 | L                 | X                | T              | D               |
| <i>Read Cycle, Continue Burst</i>  | <i>Next</i>  | <i>CR</i>         | X                | X  | X                | <i>H</i>          | <i>H</i>          | <i>L</i>         | <i>F</i>       | <i>Q</i>        |
| Read Cycle, Continue Burst         | Next         | CR                | H                | X  | X                | X                 | H                 | L                | F              | Q               |
| <i>Write Cycle, Continue Burst</i> | <i>Next</i>  | <i>CW</i>         | X                | X  | X                | <i>H</i>          | <i>H</i>          | <i>L</i>         | <i>T</i>       | <i>D</i>        |
| Write Cycle, Continue Burst        | Next         | CW                | H                | X  | X                | X                 | H                 | L                | T              | D               |
| Read Cycle, Suspend Burst          | Current      |                   | X                | X  | X                | H                 | H                 | H                | F              | Q               |
| Read Cycle, Suspend Burst          | Current      |                   | H                | X  | X                | X                 | H                 | H                | F              | Q               |
| Write Cycle, Suspend Burst         | Current      |                   | X                | X  | X                | H                 | H                 | H                | T              | D               |
| Write Cycle, Suspend Burst         | Current      |                   | H                | X  | X                | X                 | H                 | H                | T              | D               |

### Notes:

1. X = Don't Care, H = High, L = Low
2. E = T (True) if E<sub>2</sub> = 1 and  $\overline{E}_1 = \overline{E}_3 = 0$ ; E = F (False) if E<sub>2</sub> = 0 or  $\overline{E}_1 = 1$  or  $\overline{E}_3 = 1$
3. W = T (True) and F (False) is defined in the Byte Write Truth Table preceding.
4.  $\overline{G}$  is an asynchronous input.  $\overline{G}$  can be driven high at any time to disable active output drivers.  $\overline{G}$  low can only enable active drivers (shown as "Q" in the Truth Table above).
5. All input combinations shown above are tested and supported. Input combinations shown in gray boxes need not be used to accomplish basic synchronous or synchronous burst operations and may be avoided for simplicity.
6. Tying  $\overline{ADSP}$  high and  $\overline{ADSC}$  low allows simple non-burst synchronous operations. See **BOLD** items above.
7. Tying  $\overline{ADSP}$  high and  $\overline{ADV}$  low while using  $\overline{ADSC}$  to load new addresses allows simple burst operations. See *ITALIC* items above.


# Simplified State Diagram

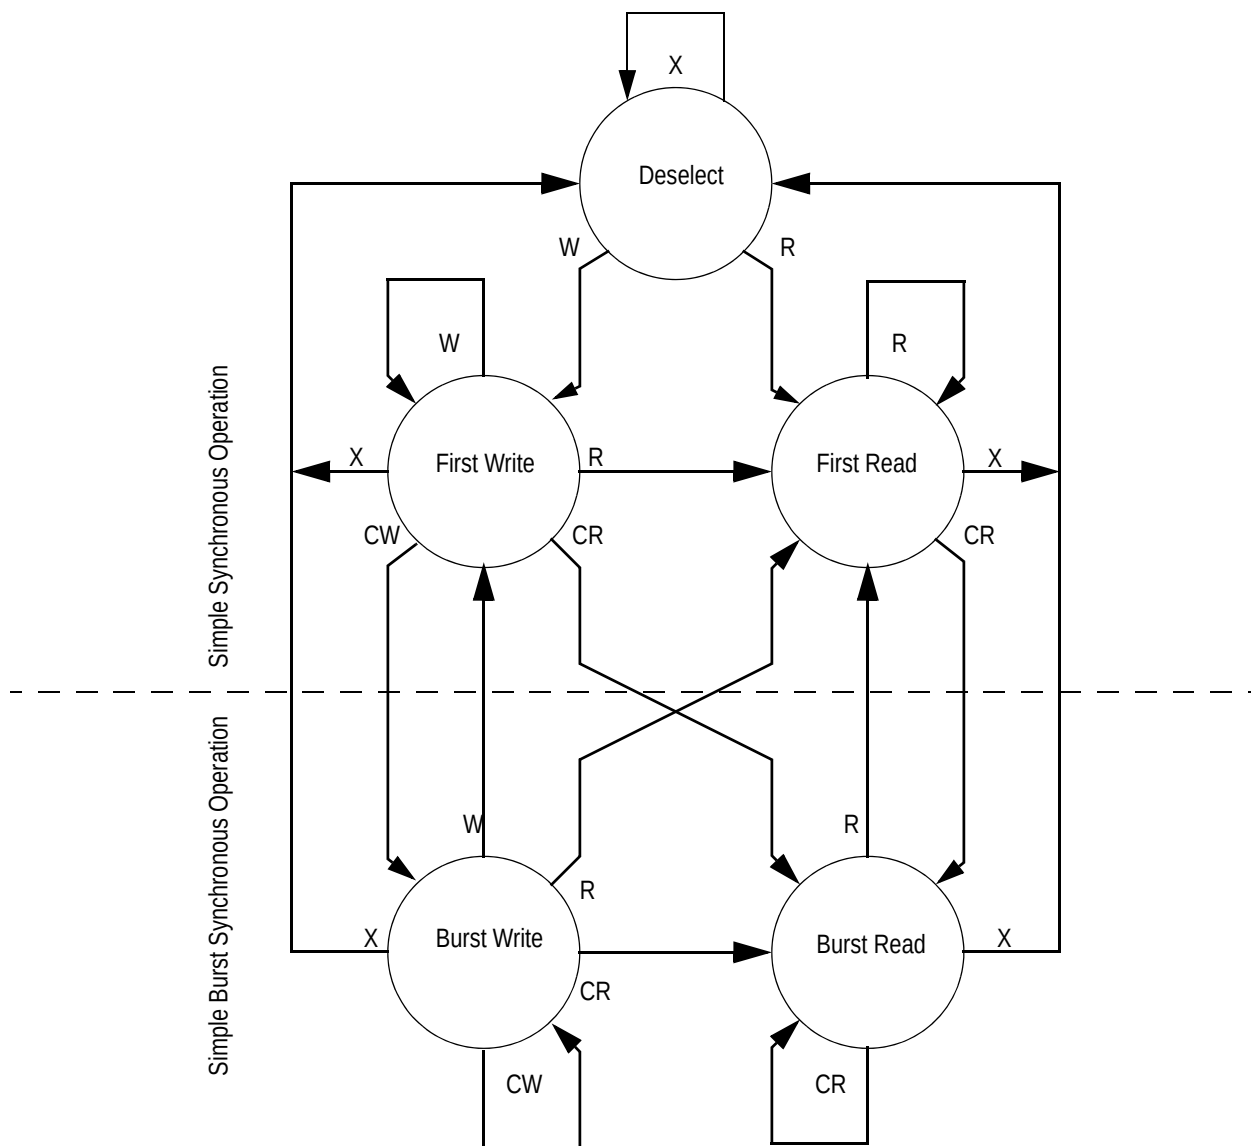

## Notes:

1. The diagram shows only supported (tested) synchronous state transitions. The diagram presumes  $\overline{G}$  is tied low.
2. The upper portion of the diagram assumes active use of only the Enable ( $\overline{E1}$ ) and Write ( $\overline{BA}$ ,  $\overline{BB}$ ,  $\overline{BC}$ ,  $\overline{BD}$ ,  $\overline{BW}$ , and  $\overline{GW}$ ) control inputs, and that  $\overline{ADSP}$  is tied high and  $\overline{ADSC}$  is tied low.
3. The upper and lower portions of the diagram together assume active use of only the Enable, Write, and  $\overline{ADSC}$  control inputs, and assumes  $\overline{ADSP}$  is tied high and  $\overline{ADV}$  is tied low.

# Simplified State Diagram with $\overline{G}$

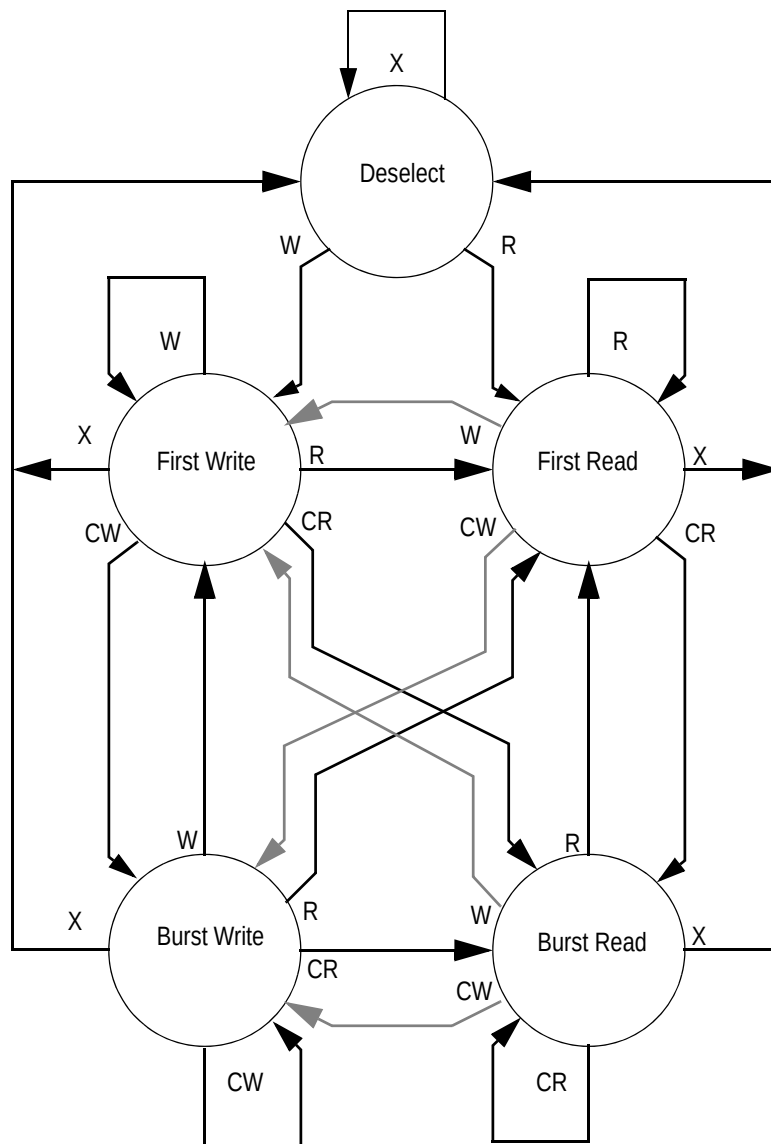

## Notes:

1. The diagram shows supported (tested) synchronous state transitions plus supported transitions that depend upon the use of  $\overline{G}$ .
2. Use of "Dummy Reads" (Read Cycles with  $\overline{G}$  High) may be used to make the transition from Read cycles to Write cycles without passing through a Deselect cycle. Dummy Read cycles increment the address counter just like normal read cycles.
3. Transitions shown in gray tone assume  $\overline{G}$  has been pulsed high long enough to turn the RAM's drivers off and for incoming data to meet Data Input Set Up Time.

## Absolute Maximum Ratings

(All voltages reference to  $V_{SS}$ )

| Symbol     | Description                   | Value                                       | Unit |
|------------|-------------------------------|---------------------------------------------|------|
| $V_{DD}$   | Voltage on $V_{DD}$ Pins      | −0.5 to 4.6                                 | V    |
| $V_{DDQ}$  | Voltage on $V_{DDQ}$ Pins     | −0.5 to $V_{DD}$                            | V    |
| $V_{I/O}$  | Voltage on I/O Pins           | −0.5 to $V_{DD} + 0.5$ ( $\leq 4.6$ V max.) | V    |
| $V_{IN}$   | Voltage on Other Input Pins   | −0.5 to $V_{DD} + 0.5$ ( $\leq 4.6$ V max.) | V    |
| $I_{IN}$   | Input Current on Any Pin      | +/−20                                       | mA   |
| $I_{OUT}$  | Output Current on Any I/O Pin | +/−20                                       | mA   |
| $P_D$      | Package Power Dissipation     | 1.5                                         | W    |
| $T_{STG}$  | Storage Temperature           | −55 to 125                                  | °C   |
| $T_{BIAS}$ | Temperature Under Bias        | −55 to 125                                  | °C   |

Note:

Permanent damage to the device may occur if the Absolute Maximum Ratings are exceeded. Operation should be restricted to Recommended Operating Conditions. Exposure to conditions exceeding the Absolute Maximum Ratings, for an extended period of time, may affect reliability of this component.

## Power Supply Voltage Ranges (1.8 V/2.5 V Version)

| Parameter                          | Symbol     | Min. | Typ. | Max.     | Unit |
|------------------------------------|------------|------|------|----------|------|
| 1.8 V Supply Voltage               | $V_{DD1}$  | 1.7  | 1.8  | 2.0      | V    |
| 2.5 V Supply Voltage               | $V_{DD2}$  | 2.3  | 2.5  | 2.7      | V    |
| 1.8 V $V_{DDQ}$ I/O Supply Voltage | $V_{DDQ1}$ | 1.7  | 1.8  | $V_{DD}$ | V    |
| 2.5 V $V_{DDQ}$ I/O Supply Voltage | $V_{DDQ2}$ | 2.3  | 2.5  | $V_{DD}$ | V    |

## $V_{DDQ2}$ & $V_{DDQ1}$ Range Logic Levels

| Parameter                   | Symbol   | Min.               | Typ. | Max.               | Unit |
|-----------------------------|----------|--------------------|------|--------------------|------|
| $V_{DD}$ Input High Voltage | $V_{IH}$ | $0.6 \cdot V_{DD}$ | —    | $V_{DD} + 0.3$     | V    |
| $V_{DD}$ Input Low Voltage  | $V_{IL}$ | −0.3               | —    | $0.3 \cdot V_{DD}$ | V    |

Notes:

- Unless otherwise noted, all performance specifications quoted are evaluated for worst case in the temperature range marked on the device.
- $V_{IH}$  (max) must be met for any instantaneous value of  $V_{DD}$ .
- $V_{DD}$  needs to power-up before or at the same time as  $V_{DDQ}$  to make sure  $V_{IH}$  (max) is not exceeded.

## Operating Temperature

| Parameter                                            | Symbol | Min. | Typ. | Max. | Unit |
|------------------------------------------------------|--------|------|------|------|------|
| Junction Temperature<br>(Commercial Range Versions)  | $T_J$  | 0    | 25   | 85   | °C   |
| Junction Temperature<br>(Industrial Range Versions)* | $T_J$  | -40  | 25   | 100  | °C   |

Note:

\* The part numbers of Industrial Temperature Range versions end with the character "I". Unless otherwise noted, all performance specifications quoted are evaluated for worst case in the temperature range marked on the device.


## Thermal Impedance

| Package  | Test PCB<br>Substrate | $\theta_{JA}$ (C°/W)<br>Airflow = 0 m/s | $\theta_{JA}$ (C°/W)<br>Airflow = 1 m/s | $\theta_{JA}$ (C°/W)<br>Airflow = 2 m/s | $\theta_{JB}$ (C°/W) | $\theta_{JC}$ (C°/W) |
|----------|-----------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|----------------------|----------------------|
| 100 TQFP | 4-layer               | 35.7                                    | 31.0                                    | 29.4                                    | 27.0                 | 8.4                  |


Notes:

- Thermal Impedance data is based on a number of samples from multiple lots and should be viewed as a typical number.
- The characteristics of the test fixture PCB influence reported thermal characteristics of the device. Be advised that a good thermal path to the PCB can result in cooling or heating of the RAM depending on PCB temperature.

## Undershoot Measurement and Timing

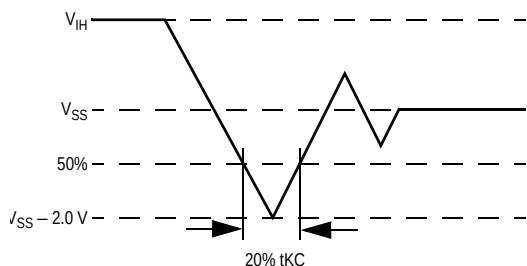

## Overshoot Measurement and Timing

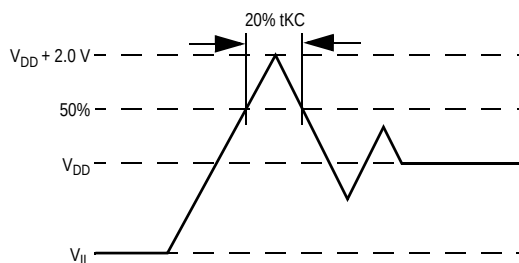

Note:

Input Under/overshoot voltage must be  $-2\text{ V} > V_i < V_{DDn} + 2\text{ V}$  not to exceed 4.6 V maximum, with a pulse width not to exceed  $20\% \text{ tKC}$ .

## Capacitance

( $T_A = 25^\circ\text{C}$ ,  $f = 1\text{ MHz}$ ,  $V_{DD} = 2.5\text{ V}$ )

| Parameter                | Symbol    | Test conditions        | Typ. | Max. | Unit |
|--------------------------|-----------|------------------------|------|------|------|
| Input Capacitance        | $C_{IN}$  | $V_{IN} = 0\text{ V}$  | 8    | 10   | pF   |
| Input/Output Capacitance | $C_{I/O}$ | $V_{OUT} = 0\text{ V}$ | 12   | 14   | pF   |

Note:


These parameters are sample tested.

## AC Test Conditions

| Parameter              | Conditions              |
|------------------------|-------------------------|
| Input high level       | $V_{DD} - 0.2\text{ V}$ |
| Input low level        | $0.2\text{ V}$          |
| Input slew rate        | $1\text{ V/ns}$         |
| Input reference level  | $V_{DD}/2$              |
| Output reference level | $V_{DDQ}/2$             |
| Output load            | Fig. 1                  |

### Notes:

1. Include scope and jig capacitance.
2. Test conditions as specified with output loading as shown in Fig. 1 unless otherwise noted.
3. Device is deselected as defined by the Truth Table.

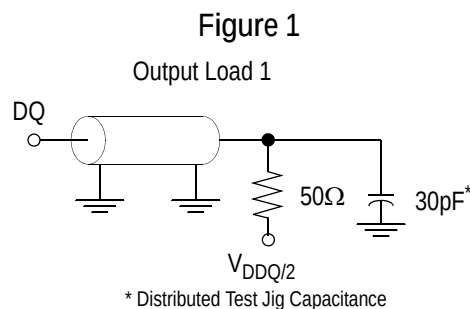

## DC Electrical Characteristics

| Parameter                                | Symbol    | Test Conditions                                      | Min                       | Max                      |
|------------------------------------------|-----------|------------------------------------------------------|---------------------------|--------------------------|
| Input Leakage Current (except mode pins) | $I_{IL}$  | $V_{IN} = 0\text{ to }V_{DD}$                        | $-1\text{ }\mu\text{A}$   | $1\text{ }\mu\text{A}$   |
| $\overline{\text{FT}}$ Input Current     | $I_{IN}$  | $V_{DD} \geq V_{IN} \geq 0\text{ V}$                 | $-100\text{ }\mu\text{A}$ | $100\text{ }\mu\text{A}$ |
| Output Leakage Current                   | $I_{OL}$  | Output Disable, $V_{OUT} = 0\text{ to }V_{DD}$       | $-1\text{ }\mu\text{A}$   | $1\text{ }\mu\text{A}$   |
| 1.8 V Output High Voltage                | $V_{OH1}$ | $I_{OH} = -4\text{ mA}$ , $V_{DDQ} = 1.7\text{ V}$   | $V_{DDQ} - 0.4\text{ V}$  | —                        |
| 2.5 V Output High Voltage                | $V_{OH2}$ | $I_{OH} = -8\text{ mA}$ , $V_{DDQ} = 2.375\text{ V}$ | $1.7\text{ V}$            | —                        |
| 1.8 V Output Low Voltage                 | $V_{OL1}$ | $I_{OL} = 4\text{ mA}$                               | —                         | $0.4\text{ V}$           |
| 2.5 V Output Low Voltage                 | $V_{OL2}$ | $I_{OL} = 8\text{ mA}$                               | —                         | $0.4\text{ V}$           |

## Operating Currents

| Parameter            | Test Conditions                                                                       | Mode          | Symbol          | -333         |                | -250         |                | -200         |                | -150         |                | Unit |
|----------------------|---------------------------------------------------------------------------------------|---------------|-----------------|--------------|----------------|--------------|----------------|--------------|----------------|--------------|----------------|------|
|                      |                                                                                       |               |                 | 0<br>to 70°C | -40<br>to 85°C | 0<br>to 70°C | -40<br>to 85°C | 0<br>to 70°C | -40<br>to 85°C | 0<br>to 70°C | -40<br>to 85°C |      |
| Operating<br>Current | Device Selected;<br>All other inputs<br>$\geq V_{IH}$ or $\leq V_{IL}$<br>Output open | (x32/<br>x36) | Pipeline        | 310<br>50    | 330<br>50      | 245<br>40    | 265<br>40      | 205<br>30    | 225<br>30      | 175<br>20    | 195<br>20      | mA   |
|                      |                                                                                       |               | Flow<br>Through | 240<br>25    | 260<br>25      | 225<br>20    | 245<br>20      | 210<br>15    | 230<br>15      | 190<br>15    | 210<br>15      |      |
|                      |                                                                                       | (x18)         | Pipeline        | 280<br>25    | 300<br>25      | 225<br>20    | 245<br>20      | 190<br>15    | 210<br>15      | 160<br>15    | 180<br>15      | mA   |
|                      |                                                                                       |               | Flow<br>Through | 220<br>15    | 240<br>15      | 205<br>10    | 225<br>10      | 195<br>10    | 215<br>10      | 180<br>10    | 200<br>10      |      |
| Standby<br>Current   | $ZZ \geq V_{DD} - 0.2 V$                                                              | —             | Pipeline        | 45           | 65             | 45           | 65             | 45           | 65             | 45           | 65             | mA   |
|                      |                                                                                       |               | Flow<br>Through | 45           | 65             | 45           | 65             | 45           | 65             | 45           | 65             |      |
| Deselect<br>Current  | Device Deselected;<br>All other inputs<br>$\geq V_{IH}$ or $\leq V_{IL}$              | —             | Pipeline        | 70           | 90             | 70           | 90             | 70           | 90             | 70           | 90             | mA   |
|                      |                                                                                       |               | Flow<br>Through | 70           | 90             | 70           | 90             | 70           | 90             | 70           | 90             |      |

### Notes:

1.  $I_{DD}$  and  $I_{DDQ}$  apply to any combination of  $V_{DD}$  and  $V_{DDQ}$  operation.
2. All parameters listed are worst case scenario.


## AC Electrical Characteristics

|              | Parameter                          | Symbol                        | -333 |     | -250 |     | -200 |     | -150 |     | Unit |
|--------------|------------------------------------|-------------------------------|------|-----|------|-----|------|-----|------|-----|------|
|              |                                    |                               | Min  | Max | Min  | Max | Min  | Max | Min  | Max |      |
| Pipeline     | Clock Cycle Time                   | t <sub>KC</sub>               | 3.0  | —   | 4.0  | —   | 5.0  | —   | 6.7  | —   | ns   |
|              | Clock to Output Valid              | t <sub>KQ</sub>               | —    | 3.0 | —    | 3.0 | —    | 3.0 | —    | 3.8 | ns   |
|              | Clock to Output Invalid            | t <sub>KQX</sub>              | 1.5  | —   | 1.5  | —   | 1.5  | —   | 1.5  | —   | ns   |
|              | Clock to Output in Low-Z           | t <sub>LZ</sub> <sup>1</sup>  | 1.5  | —   | 1.5  | —   | 1.5  | —   | 1.5  | —   | ns   |
|              | Setup time                         | t <sub>S</sub>                | 1.0  | —   | 1.2  | —   | 1.4  | —   | 1.5  | —   | ns   |
|              | Hold time                          | t <sub>H</sub>                | 0.1  | —   | 0.2  | —   | 0.4  | —   | 0.5  | —   | ns   |
| Flow Through | Clock Cycle Time                   | t <sub>KC</sub>               | 5.0  | —   | 5.5  | —   | 6.5  | —   | 7.5  | —   | ns   |
|              | Clock to Output Valid              | t <sub>KQ</sub>               | —    | 5.0 | —    | 5.5 | —    | 6.5 | —    | 7.5 | ns   |
|              | Clock to Output Invalid            | t <sub>KQX</sub>              | 2.0  | —   | 2.0  | —   | 2.0  | —   | 2.0  | —   | ns   |
|              | Clock to Output in Low-Z           | t <sub>LZ</sub> <sup>1</sup>  | 2.0  | —   | 2.0  | —   | 2.0  | —   | 2.0  | —   | ns   |
|              | Setup time                         | t <sub>S</sub>                | 1.3  | —   | 1.5  | —   | 1.5  | —   | 1.5  | —   | ns   |
|              | Hold time                          | t <sub>H</sub>                | 0.3  | —   | 0.5  | —   | 0.5  | —   | 0.5  | —   | ns   |
|              | Clock HIGH Time                    | t <sub>KH</sub>               | 1.0  | —   | 1.3  | —   | 1.3  | —   | 1.5  | —   | ns   |
|              | Clock LOW Time                     | t <sub>KL</sub>               | 1.2  | —   | 1.5  | —   | 1.5  | —   | 1.7  | —   | ns   |
|              | Clock to Output in High-Z          | t <sub>HZ</sub> <sup>1</sup>  | 1.5  | 3.0 | 1.5  | 3.0 | 1.5  | 3.0 | 1.5  | 3.8 | ns   |
|              | $\overline{G}$ to Output Valid     | t <sub>OE</sub>               | —    | 3.0 | —    | 3.0 | —    | 3.0 | —    | 3.8 | ns   |
|              | $\overline{G}$ to output in Low-Z  | t <sub>OLZ</sub> <sup>1</sup> | 0    | —   | 0    | —   | 0    | —   | 0    | —   | ns   |
|              | $\overline{G}$ to output in High-Z | t <sub>OHZ</sub> <sup>1</sup> | —    | 3.0 | —    | 3.0 | —    | 3.0 | —    | 3.8 | ns   |
|              | ZZ setup time                      | t <sub>ZZS</sub> <sup>2</sup> | 5    | —   | 5    | —   | 5    | —   | 5    | —   | ns   |
|              | ZZ hold time                       | t <sub>ZZH</sub> <sup>2</sup> | 1    | —   | 1    | —   | 1    | —   | 1    | —   | ns   |
|              | ZZ recovery                        | t <sub>ZZR</sub>              | 20   | —   | 20   | —   | 20   | —   | 20   | —   | ns   |


## Notes:

- These parameters are sampled and are not 100% tested.
- ZZ is an asynchronous signal. However, in order to be recognized on any given clock cycle, ZZ must meet the specified setup and hold times as specified above.

# Pipeline Mode Timing (DCD)

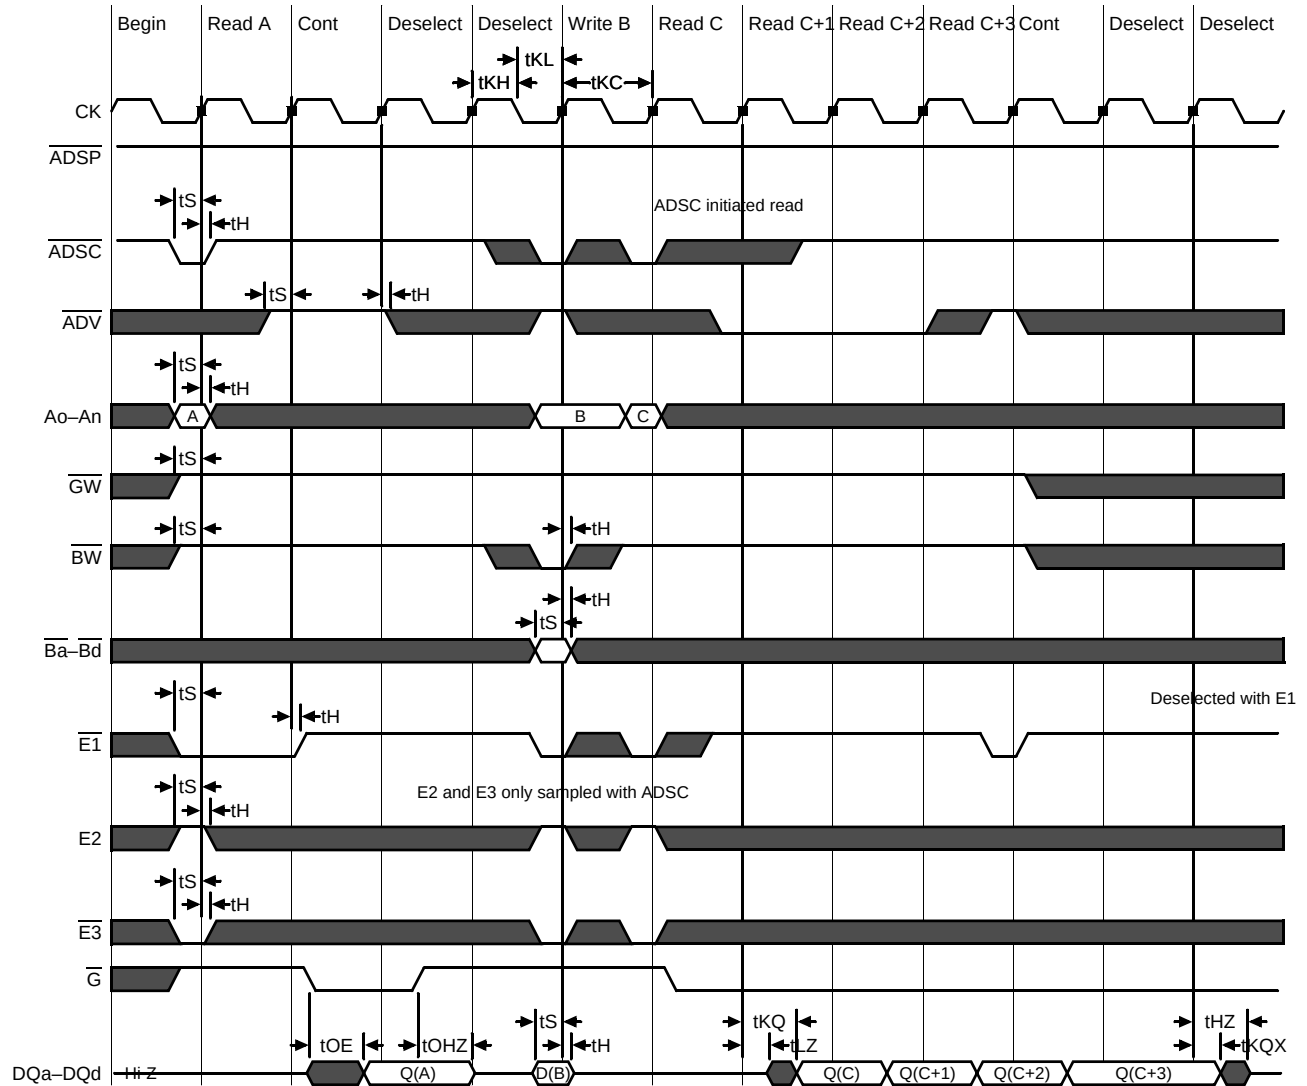

# Flow Through Mode Timing (DCD)

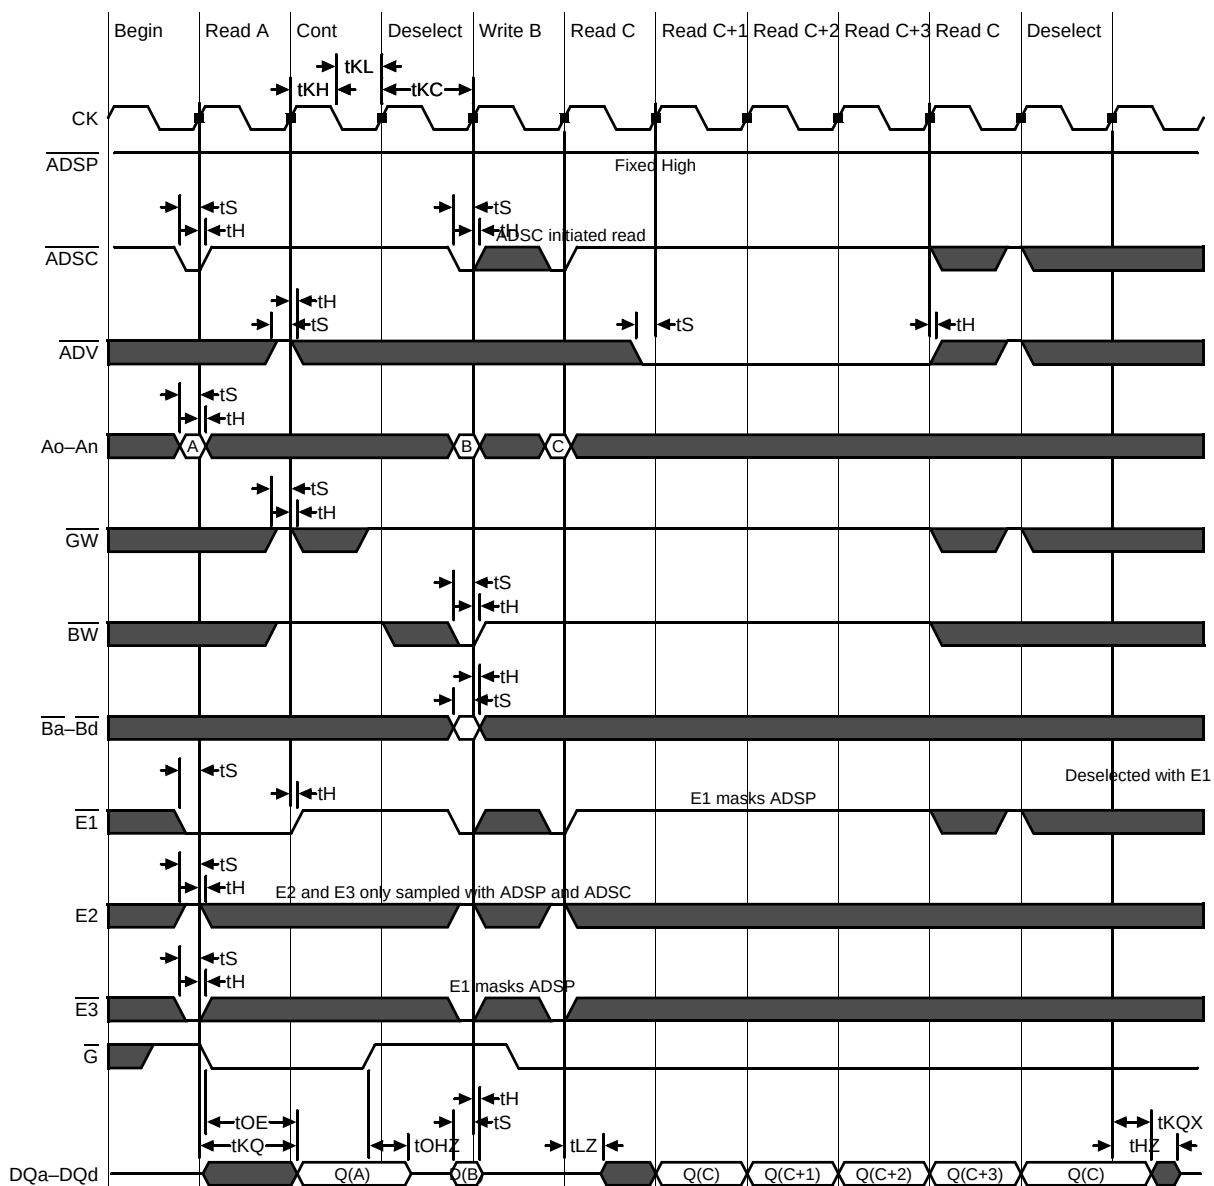


## Sleep Mode

During normal operation, ZZ must be pulled low, either by the user or by its internal pull down resistor. When ZZ is pulled high, the SRAM will enter a Power Sleep mode after 2 cycles. At this time, internal state of the SRAM is preserved. When ZZ returns to low, the SRAM operates normally after 2 cycles of wake up time.


Sleep mode is a low current, power-down mode in which the device is deselected and current is reduced to  $I_{SB2}$ . The duration of Sleep mode is dictated by the length of time the ZZ is in a High state. After entering Sleep mode, all inputs except ZZ become disabled and all outputs go to High-Z. The ZZ pin is an asynchronous, active high input that causes the device to enter Sleep mode. When the ZZ pin is driven high,  $I_{SB2}$  is guaranteed after the time  $t_{ZZI}$  is met. Because ZZ is an asynchronous input, pending operations or operations in progress may not be properly completed if ZZ is asserted. Therefore, Sleep mode must not be initiated until valid pending operations are completed. Similarly, when exiting Sleep mode during  $t_{ZZR}$ , only a Deselect or Read commands may be applied while the SRAM is recovering from Sleep mode.

Sleep Mode Timing Diagram

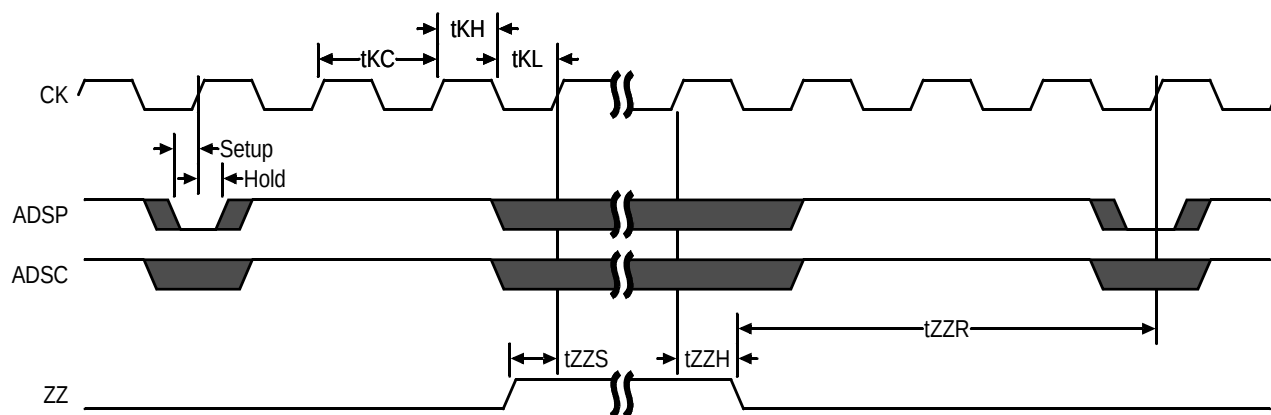

## TQFP Package Drawing (Package GT)

| Symbol   | Description        | Min. | Nom. | Max  |
|----------|--------------------|------|------|------|
| A1       | Standoff           | 0.05 | 0.10 | 0.15 |
| A2       | Body Thickness     | 1.35 | 1.40 | 1.45 |
| b        | Lead Width         | 0.20 | 0.30 | 0.40 |
| c        | Lead Thickness     | 0.09 | —    | 0.20 |
| D        | Terminal Dimension | 21.9 | 22.0 | 22.1 |
| D1       | Package Body       | 19.9 | 20.0 | 20.1 |
| E        | Terminal Dimension | 15.9 | 16.0 | 16.1 |
| E1       | Package Body       | 13.9 | 14.0 | 14.1 |
| e        | Lead Pitch         | —    | 0.65 | —    |
| L        | Foot Length        | 0.45 | 0.60 | 0.75 |
| L1       | Lead Length        | —    | 1.00 | —    |
| Y        | Coplanarity        |      |      | 0.10 |
| $\theta$ | Lead Angle         | 0°   | —    | 7°   |

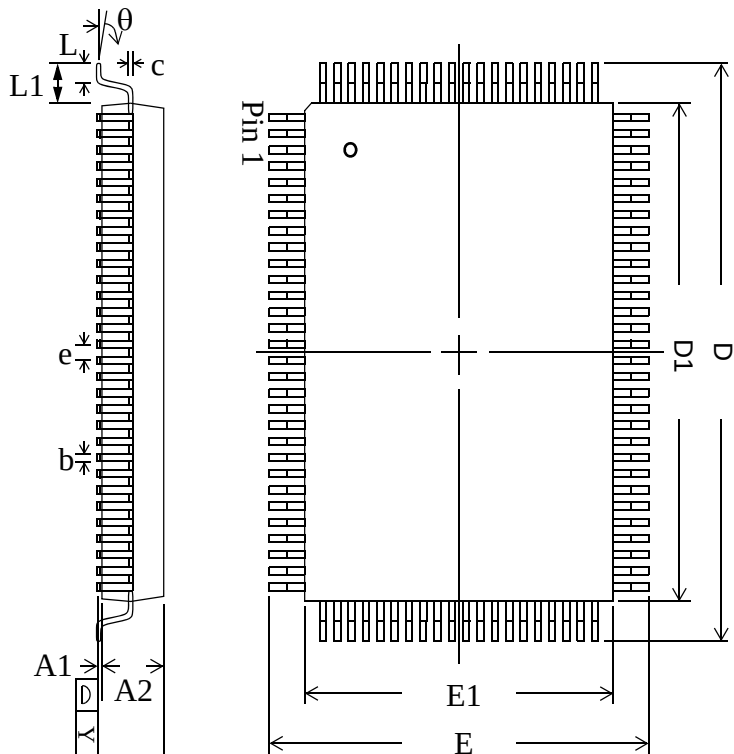

## Notes:

1. All dimensions are in millimeters (mm).
2. Package width and length do not include mold protrusion.

## Ordering Information for GSI Synchronous Burst RAMs

| Org       | Part Number <sup>1</sup> | Type                  | Voltage Option | Package             | Speed <sup>2</sup><br>(MHz/ns) | T <sub>J</sub> <sup>3</sup> |
|-----------|--------------------------|-----------------------|----------------|---------------------|--------------------------------|-----------------------------|
| 1M x 18   | GS8160E18DGT-333         | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 333/5.0                        | C                           |
| 1M x 18   | GS8160E18DGT-250         | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 250/5.5                        | C                           |
| 1M x 18   | GS8160E18DGT-200         | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 200/6.5                        | C                           |
| 1M x 18   | GS8160E18DGT-150         | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 150/7.5                        | C                           |
| 512K x 32 | GS8160E32DGT-333         | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 333/5.0                        | C                           |
| 512K x 32 | GS8160E32DGT-250         | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 250/5.5                        | C                           |
| 512K x 32 | GS8160E32DGT-200         | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 200/6.5                        | C                           |
| 512K x 32 | GS8160E32DGT-150         | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 150/7.5                        | C                           |
| 512K x 36 | GS8160E36DGT-333         | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 333/5.0                        | C                           |
| 512K x 36 | GS8160E36DGT-250         | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 250/5.5                        | C                           |
| 512K x 36 | GS8160E36DGT-200         | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 200/6.5                        | C                           |
| 512K x 36 | GS8160E36DGT-150         | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 150/7.5                        | C                           |
| 1M x 18   | GS8160E18DGT-333I        | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 333/5.0                        | I                           |
| 1M x 18   | GS8160E18DGT-250I        | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 250/5.5                        | I                           |
| 1M x 18   | GS8160E18DGT-200I        | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 200/6.5                        | I                           |
| 1M x 18   | GS8160E18DGT-150I        | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 150/7.5                        | I                           |
| 512K x 32 | GS8160E32DGT-333I        | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 333/5.0                        | I                           |
| 512K x 32 | GS8160E32DGT-250I        | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 250/5.5                        | I                           |
| 512K x 32 | GS8160E32DGT-200I        | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 200/6.5                        | I                           |
| 512K x 32 | GS8160E32DGT-150I        | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 150/7.5                        | I                           |
| 512K x 36 | GS8160E36DGT-333I        | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 333/5.0                        | I                           |
| 512K x 36 | GS8160E36DGT-250I        | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 250/5.5                        | I                           |
| 512K x 36 | GS8160E36DGT-200I        | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 200/6.5                        | I                           |
| 512K x 36 | GS8160E36DGT-150I        | DCD Synchronous Burst | 1.8 V or 2.5 V | RoHS-compliant TQFP | 150/7.5                        | I                           |

### Notes:

- Customers requiring delivery in Tape and Reel should add the character "T" to the end of the part number.  
Example: GS8160E18DGT-150IVT.
- The speed column indicates the cycle frequency (MHz) of the device in Pipeline mode and the latency (ns) in Flow Through mode. Each device is Pipeline/Flow Through mode-selectable by the user.
- C = Commercial Temperature Range. I = Industrial Temperature Range.
- GSI offers other versions this type of device in many different configurations and with a variety of different features, only some of which are covered in this data sheet. See the GSI Technology web site ([www.gsitechnology.com](http://www.gsitechnology.com)) for a complete listing of current offerings.

## 18Mb Sync SRAM Datasheet Revision History

| File Name        | Types of Changes<br>Format or Content | Description of changes                                                                                                                   |
|------------------|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| 8160ExxD_V_r1    |                                       | • Creation of new datasheet                                                                                                              |
| 8160ExxD_V_r1_01 | Content                               | • Addition of IDD numbers                                                                                                                |
| 8160ExxD_V_r1_02 | Content                               | • Updated Absolute Maximum Ratings                                                                                                       |
| 8160ExxD_V_r1_03 | Content                               | • Updated to reflect MP status<br>• (Rev1.03a: Corrected tHZ and tOHZ 333 MHz and 300 MHz max to 3.0 ns; corrected TQFP thermal numbers) |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9