


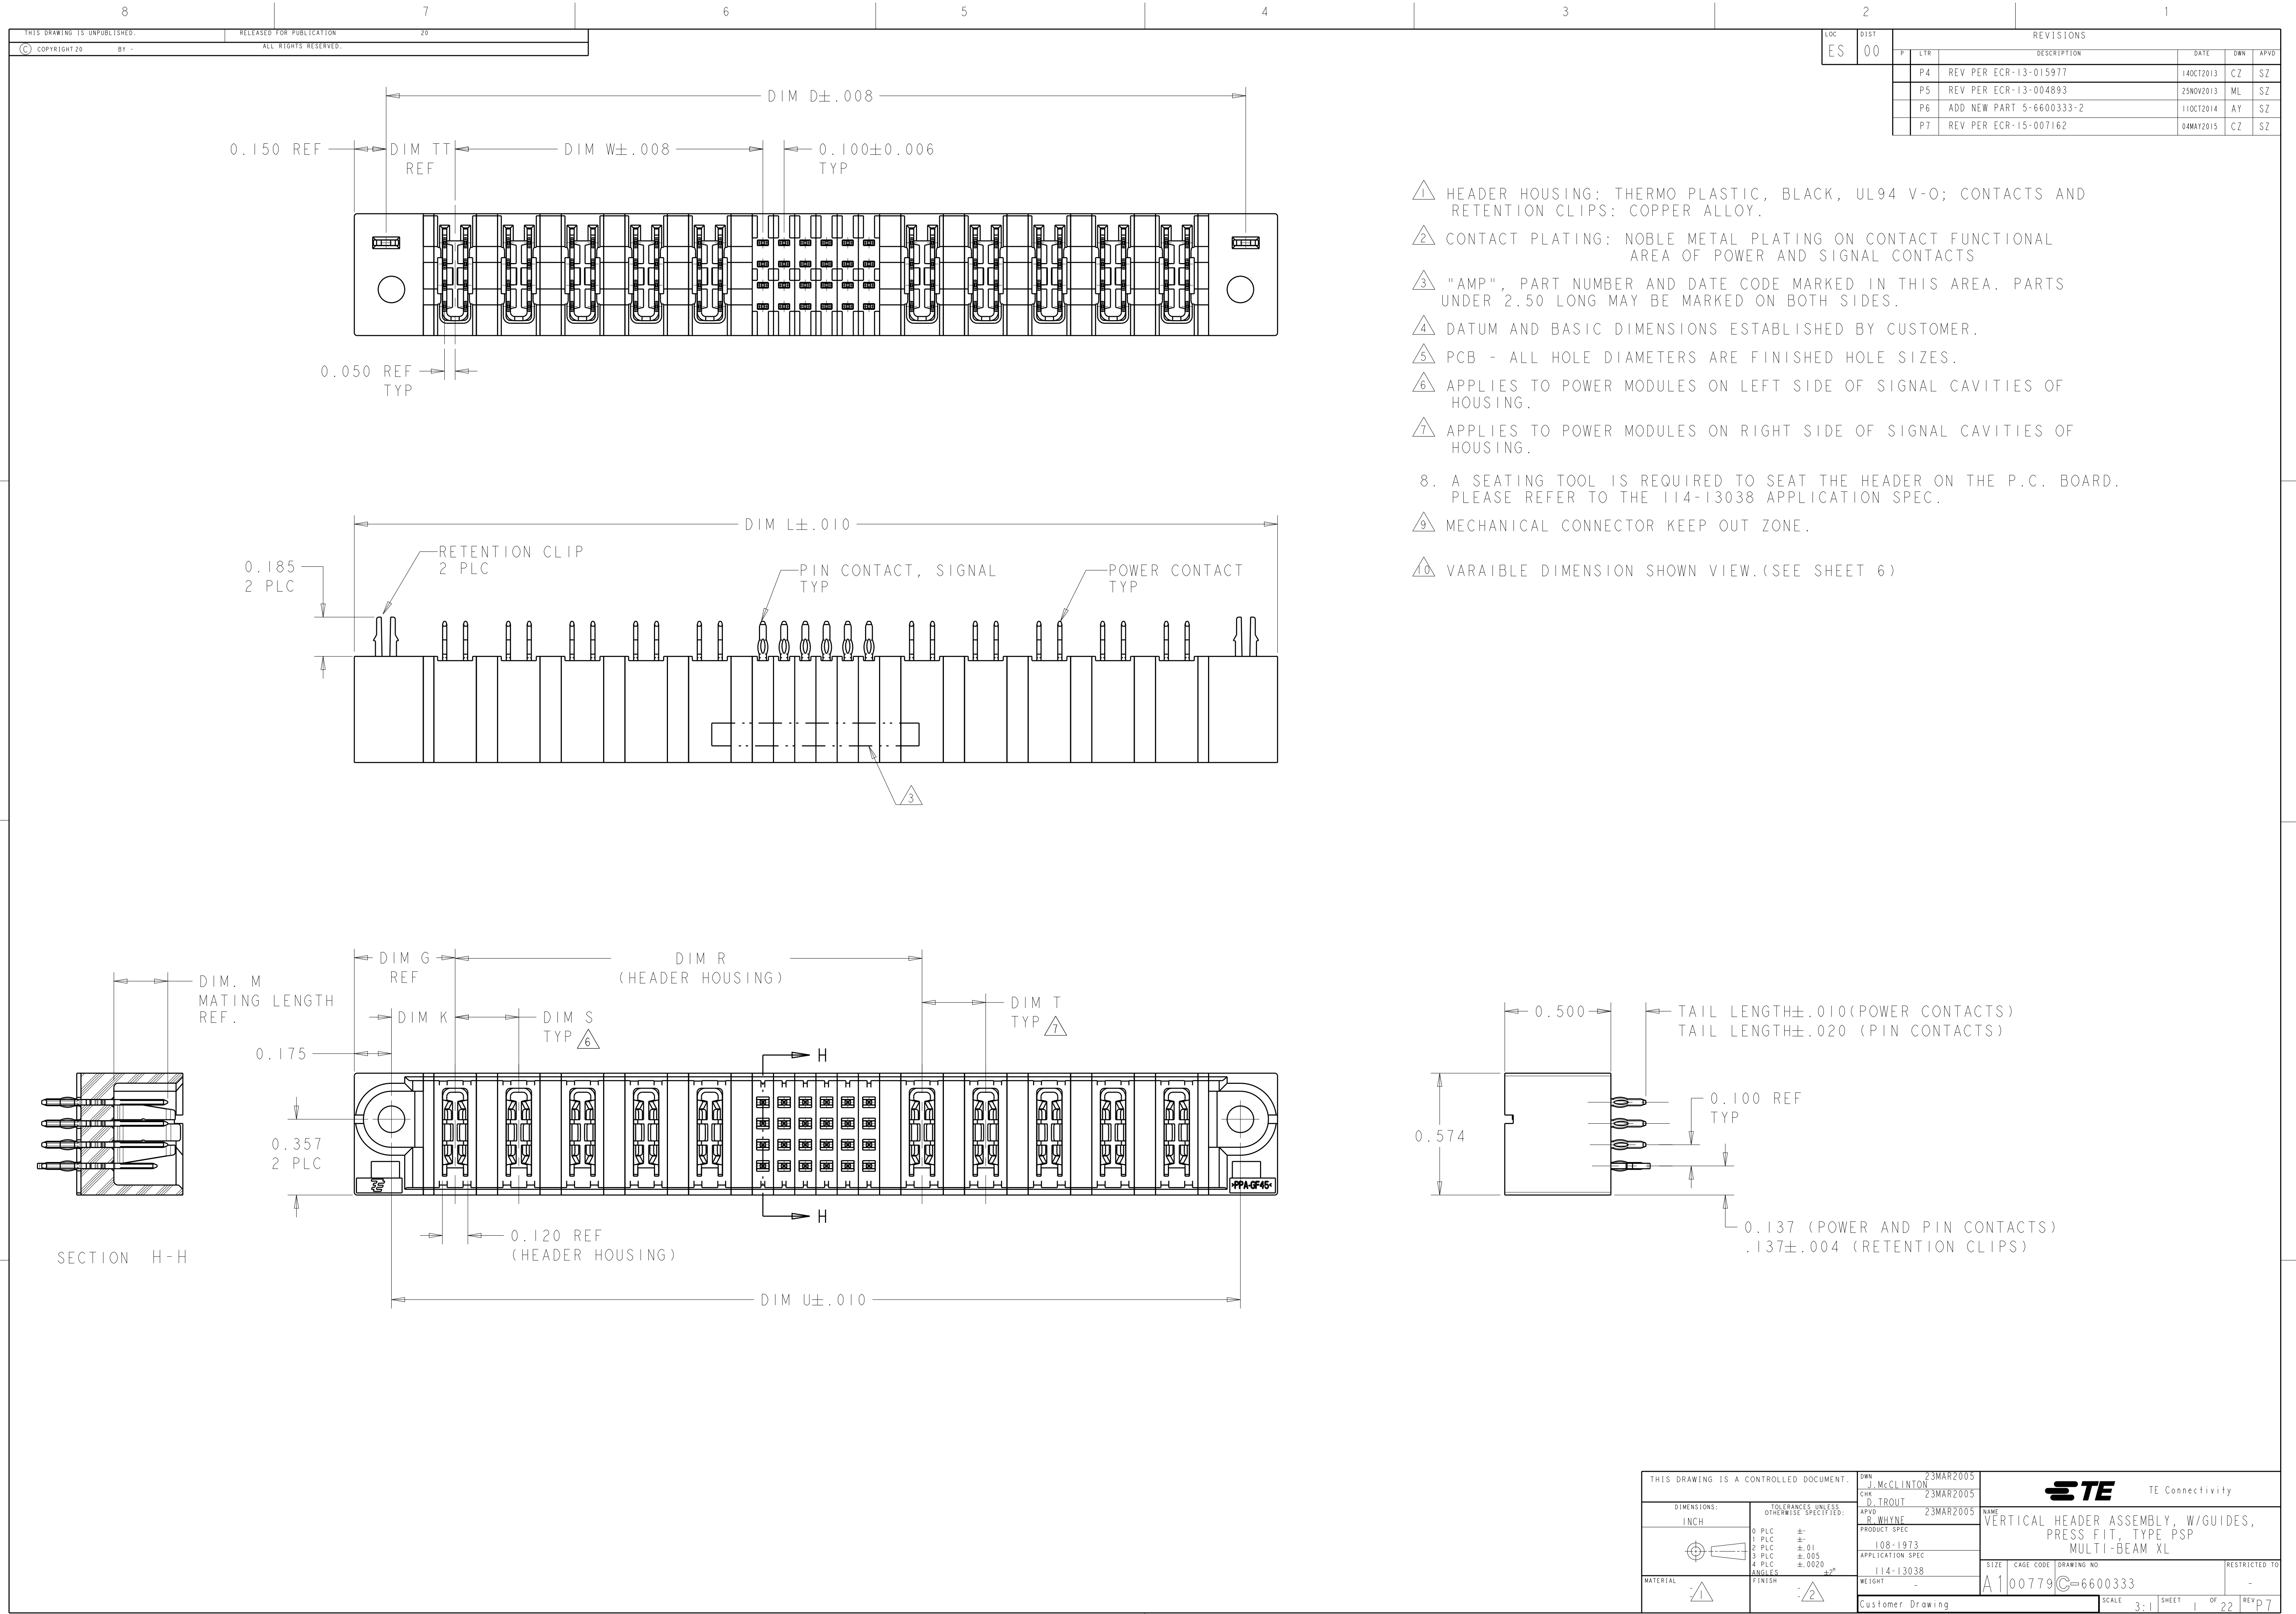


LOC		DIST		REVISONS			
P	LYR	DESCRIPTION		DATE	DWN	APVD	
P4		REV PER ECR-13-015977		14OCT2013	CZ	SZ	
P5		REV PER ECR-13-004893		25NOV2013	ML	SZ	
P6		ADD NEW PART 5-6600333-2		11OCT2014	AY	SZ	
P7		REV PER ECR-15-007162		04MAY2015	CZ	SZ	

1. HEADER HOUSING: THERMO PLASTIC, BLACK, UL94 V-O; CONTACTS AND RETENTION CLIPS: COPPER ALLOY.
2. CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
3. "AMP", PART NUMBER AND DATE CODE MARKED IN THIS AREA. PARTS UNDER 2.50 LONG MAY BE MARKED ON BOTH SIDES.
4. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
5. PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
6. APPLIES TO POWER MODULES ON LEFT SIDE OF SIGNAL CAVITIES OF HOUSING.
7. APPLIES TO POWER MODULES ON RIGHT SIDE OF SIGNAL CAVITIES OF HOUSING.
8. A SEATING TOOL IS REQUIRED TO SEAT THE HEADER ON THE P.C. BOARD. PLEASE REFER TO THE 114-13038 APPLICATION SPEC.
9. MECHANICAL CONNECTOR KEEP OUT ZONE.
10. VARAIBLE DIMENSION SHOWN VIEW.(SEE SHEET 6)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. McCLINTON 23MAR2005	TE Connectivity	NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
DIMENSIONS: INCH		CHK D. TROUT 23MAR2005			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. WHYNE 23MAR2005	PRODUCT SPEC		SIZE
0 PLC ±.01		108-1973		CAGE CODE	
1 PLC ±.01		APPLICATION SPEC		DRAWING NO	
2 PLC ±.005		114-13038		REV	
3 PLC ±.005		WEIGHT		P7	
4 PLC ±.0020		Customer Drawing		SCALE 3:1	
ANGLES #2°		SHEET 1 OF 22		REV	
FINISH		Customer Drawing		REV	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

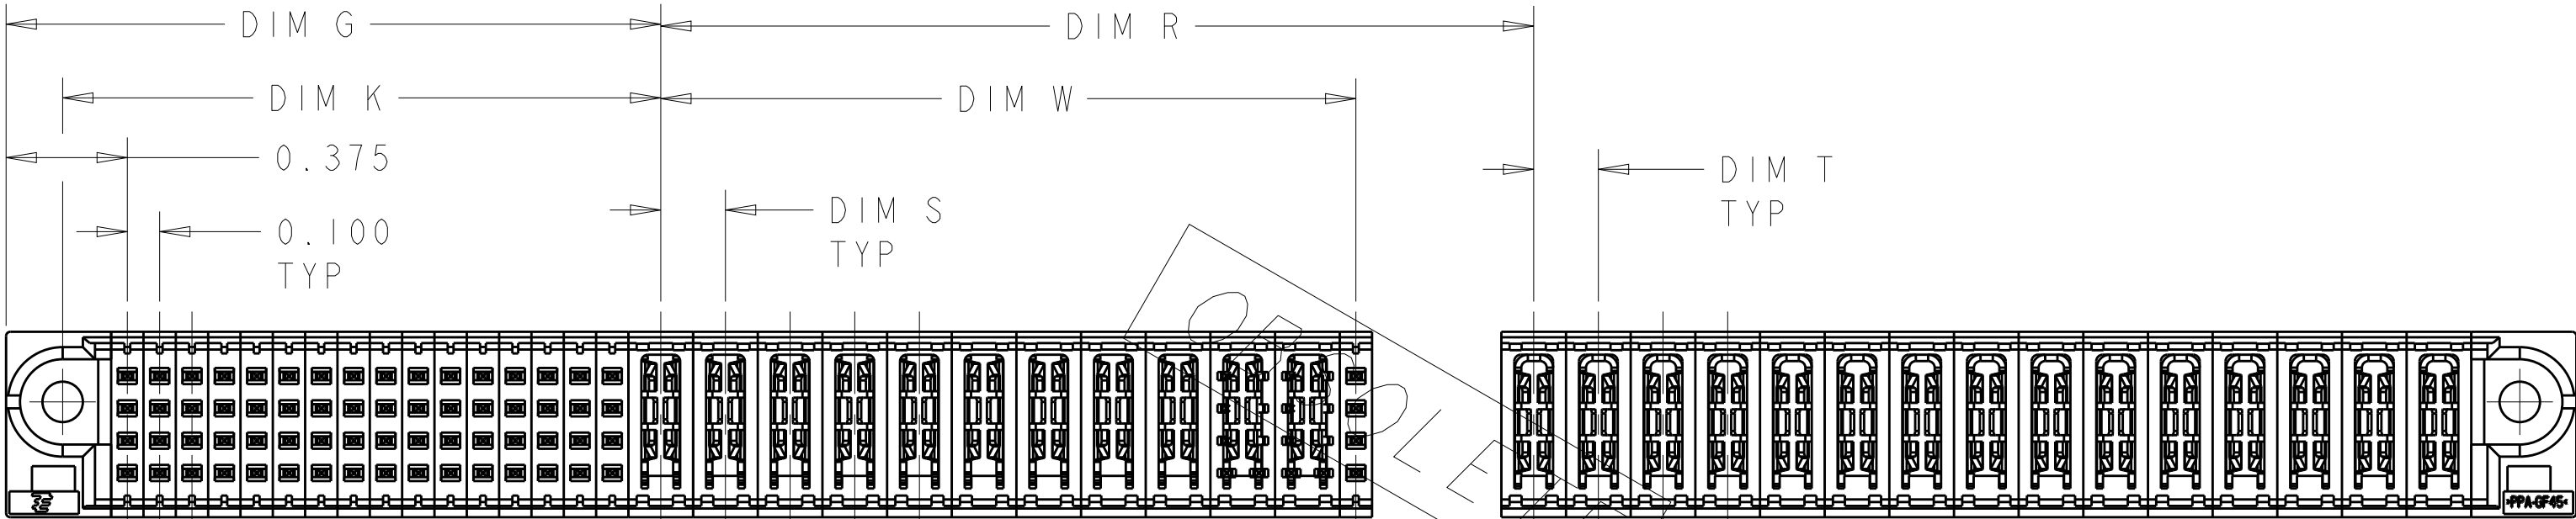

PART NUMBER 2-6600333-3
UNSPECIFIED REFER TO TEH SHEET 1

P6	.300	.425	2.500	.250	.250	1.700	2.850	.275	.450	2.550	NO	2P + 48S + 2P	5-6600333-2
	.300	1.425	4.250	.250	.250	2.700	4.600	.275	.450	4.300	NO	6P + 48S + 5P	5-6600333-1
P1	.300	.425	2.400	.250	.250	1.100	2.750	.275	.450	2.450	NO	2P + 24S + 4P	5-6600333-0
	.300	.175	1.100	-	-	.550	1.450	.275	.450	1.150	YES	1P + 12S + 1P	4-6600333-9
N7	.300	1.225	4.000	.250	.250	2.200	4.350	.275	.450	4.057	NO	5P + 24S + 6P	4-6600333-8
	.300	.925	2.600	.250	.250	1.300	2.950	.275	.450	2.650	YES	4P + 12S + 4P	4-6600333-6
N3	.300	.925	2.600	.250	.250	1.300	2.950	.275	.450	2.650	YES	4P + 12S + 4P	4-6600333-6
	.325	.550	2.200	.300	.300	1.300	2.550	.300	.475	2.250	YES	2ACP + 24S+ 2ACP	4-6600333-5
N5	.300	.425	1.900	.250	.250	1.100	2.250	.275	.450	1.950	YES	2P + 24S + 2P	4-6600333-4
	.325	.550	2.200	.300	.300	1.300	2.550	.300	.475	2.250	YES	2ACP + 24S + 2ACP	4-6600333-3
N4	.300	1.925	4.700	.250	.250	2.400	5.050	.275	.450	4.750	YES	8P + 16S + 8P	4-6600333-2
	.300	.425	1.600	.250	.250	.800	1.950	.275	.450	1.650	YES	2P + 12S + 2P	4-6600333-1
	.325	.850	2.800	.300	.300	1.600	3.150	.300	.475	2.850	YES	3ACP + 24S + 3ACP	3-6600333-9
	.300	1.425	3.500	.250	.250	1.700	3.850	.275	.450	3.550	YES	6P + 8S + 6P	3-6600333-8
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	3-6600333-7
	.300	.925	3.700	.250	.250	2.400	4.050	.275	.450	3.750	NO	4P + 56S + 4P	3-6600333-6
	.300	.675	2.400	.250	.250	1.350	2.750	.275	.450	2.450	YES	3P + 24S + 3P	3-6600333-5
	.300	.925	2.500	.250	.250	1.200	2.850	.275	.450	2.550	YES	4P + 8S + 4P	3-6600333-4
	.300	.925	2.700	.250	.250	1.400	3.050	.275	.450	2.750	NO	4P + 16S + 4P	3-6600333-3
	.300	.925	2.900	.250	.250	1.600	3.250	.275	.450	2.950	NO	4P + 24S + 4P	3-6600333-2
	.325	1.750	4.800	.250	.300	2.475	5.150	.300	.475	4.850	YES	6ACP + 24S + 8P	3-6600333-1
	.300	.225	1.300	-	-	.750	1.650	.275	.450	1.350	YES	1P + 16S + 1P	3-6600333-0
	.300	.425	2.100	-	.250	1.300	2.450	.275	.450	2.150	YES	2P + 32S + 2P	2-6600333-9
	.300	.925	2.450	.250	.250	1.400	2.800	.275	.450	2.500	YES	4P + 16S + 3P	2-6600333-8
	.300	.975	3.250	.250	.250	1.700	3.600	.275	.450	3.300	YES	4P + 24S + 5P	2-6600333-7
	.300	.675	2.400	.250	.250	1.350	2.750	.275	.450	2.450	YES	3P + 24S + 3P	2-6600333-6
	.300	.925	2.450	.250	.250	1.400	2.800	.275	.450	2.500	YES	4P + 16S + 3P	2-6600333-5
ETE	.275	2.000	5.450			2.650	5.800	.250	.425	5.500	YES	10P + 24S + 12P	2-6600333-4
	1.875	2.150	7.600	.200	.200	2.700	7.950	1.850	2.025	7.650	YES	64S+11P+20S+15P	2-6600333-3
	.275	2.000	5.450			2.650	5.800	.250	.425	5.500	YES	10P + 24S + 12P	2-6600333-2
	.325	1.750	4.800	.250	.300	2.475	5.150	.300	.475	4.850	YES	6ACP + 24S + 8P	2-6600333-1
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	1-6600333-6
	.300	1.425	3.900	.250	.250	2.100	4.250	.275	.450	3.950	YES	6P + 24S + 6P	1-6600333-5
	.300	.975	3.200	.250	.250	1.900	3.550	.275	.450	3.250	YES	4P + 32S + 4P	1-6600333-4
	.300	1.425	3.900	.250	.250	2.100	4.250	.275	.450	3.950	YES	6P + 24S + 6P	1-6600333-3
	.300	.425	1.900	.250	.250	1.100	2.250	.275	.450	1.950	YES	2P + 24S + 2P	1-6600333-2
	.325	.850	2.800	.300	.300	1.600	3.150	.300	.475	2.850	YES	3ACP + 24S + 3ACP	1-6600333-1
	.300	.475	1.800	.250	.250	1.000	2.150	.275	.450	1.850	YES	2P + 16S + 2P	1-6600333-0
	.300	.225	1.300	-	-	.750	1.650	.275	.450	1.350	YES	1P + 16S + 1P	6600333-9
	.300	.425	3.250	-	.250	2.700	3.600	.275	.450	3.300	YES	2P + 88S + 1P	6600333-8
	.300	.725	2.300	.250	.250	1.250	2.650	.275	.450	2.350	YES	3P + 16S + 3P	6600333-7
	.300	.975	3.000	.250	.250	1.700	3.350	.275	.450	3.050	YES	4P + 24S + 4P	6600333-6
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	6600333-5
	.300	.425	1.700	.250	.250	.900	2.050	.275	.450	1.750	YES	2P + 16S + 2P	6600333-4
	.325	1.450	4.000	.300	.300	2.200	4.350	.300	.475	4.050	YES	5ACP + 24S + 5ACP	6600333-1
DIM "TT" DIM "W" DIM "U" DIM "T" DIM "S" DIM "R" DIM "L" DIM "K" DIM "G" DIM "D" RETENTION CLIP DESCRIPTION PART NO													

OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
J. McCLINTON
23MAR2005

DIMENSIONS:
INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.020
FINISH

MATERIAL
-

Customer Drawing

CHK
D. TROUT
23MAR2005

APVD
R. WHYNE
23MAR2005

PRODUCT SPEC
108-1973

APPLICATION SPEC
114-13038

WEIGHT
-

NAME
VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

SIZE
A1

CAGE CODE
00779

DRAWING NO
6600333

RESTRICTED TO
-


TE Connectivity

SCALE
3:1


SHEET
2

OF
22

REV
P7

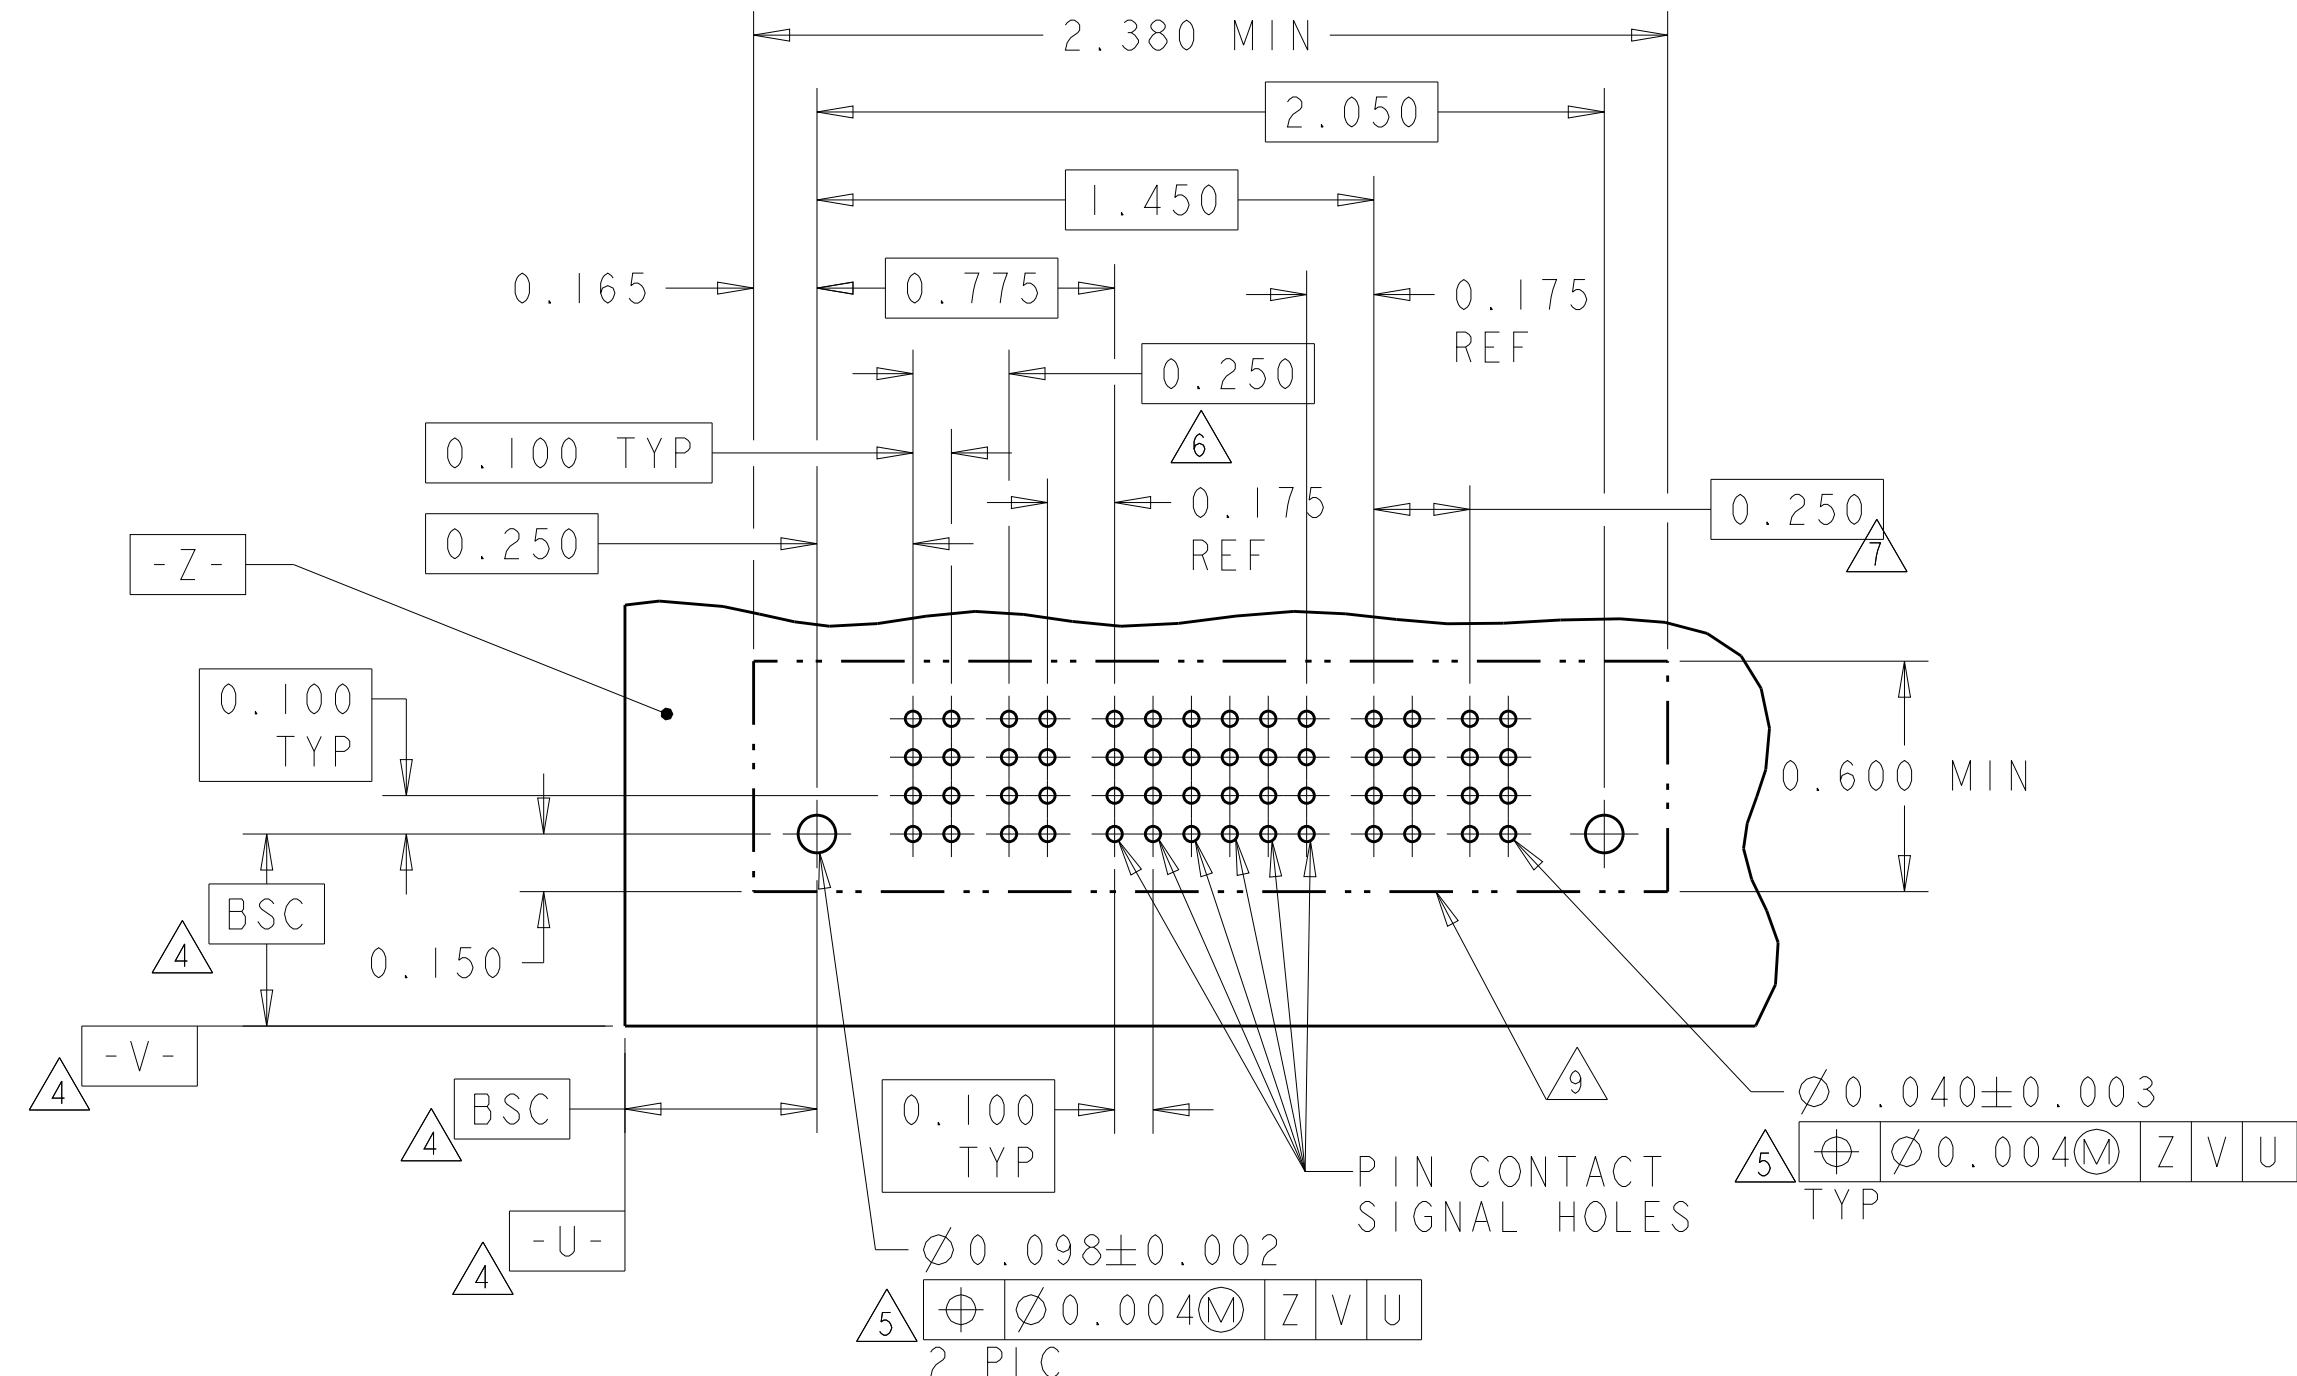[illegible]

RECOMMENDED PCB LAYOUT 6600333-5
SCALE 2:1

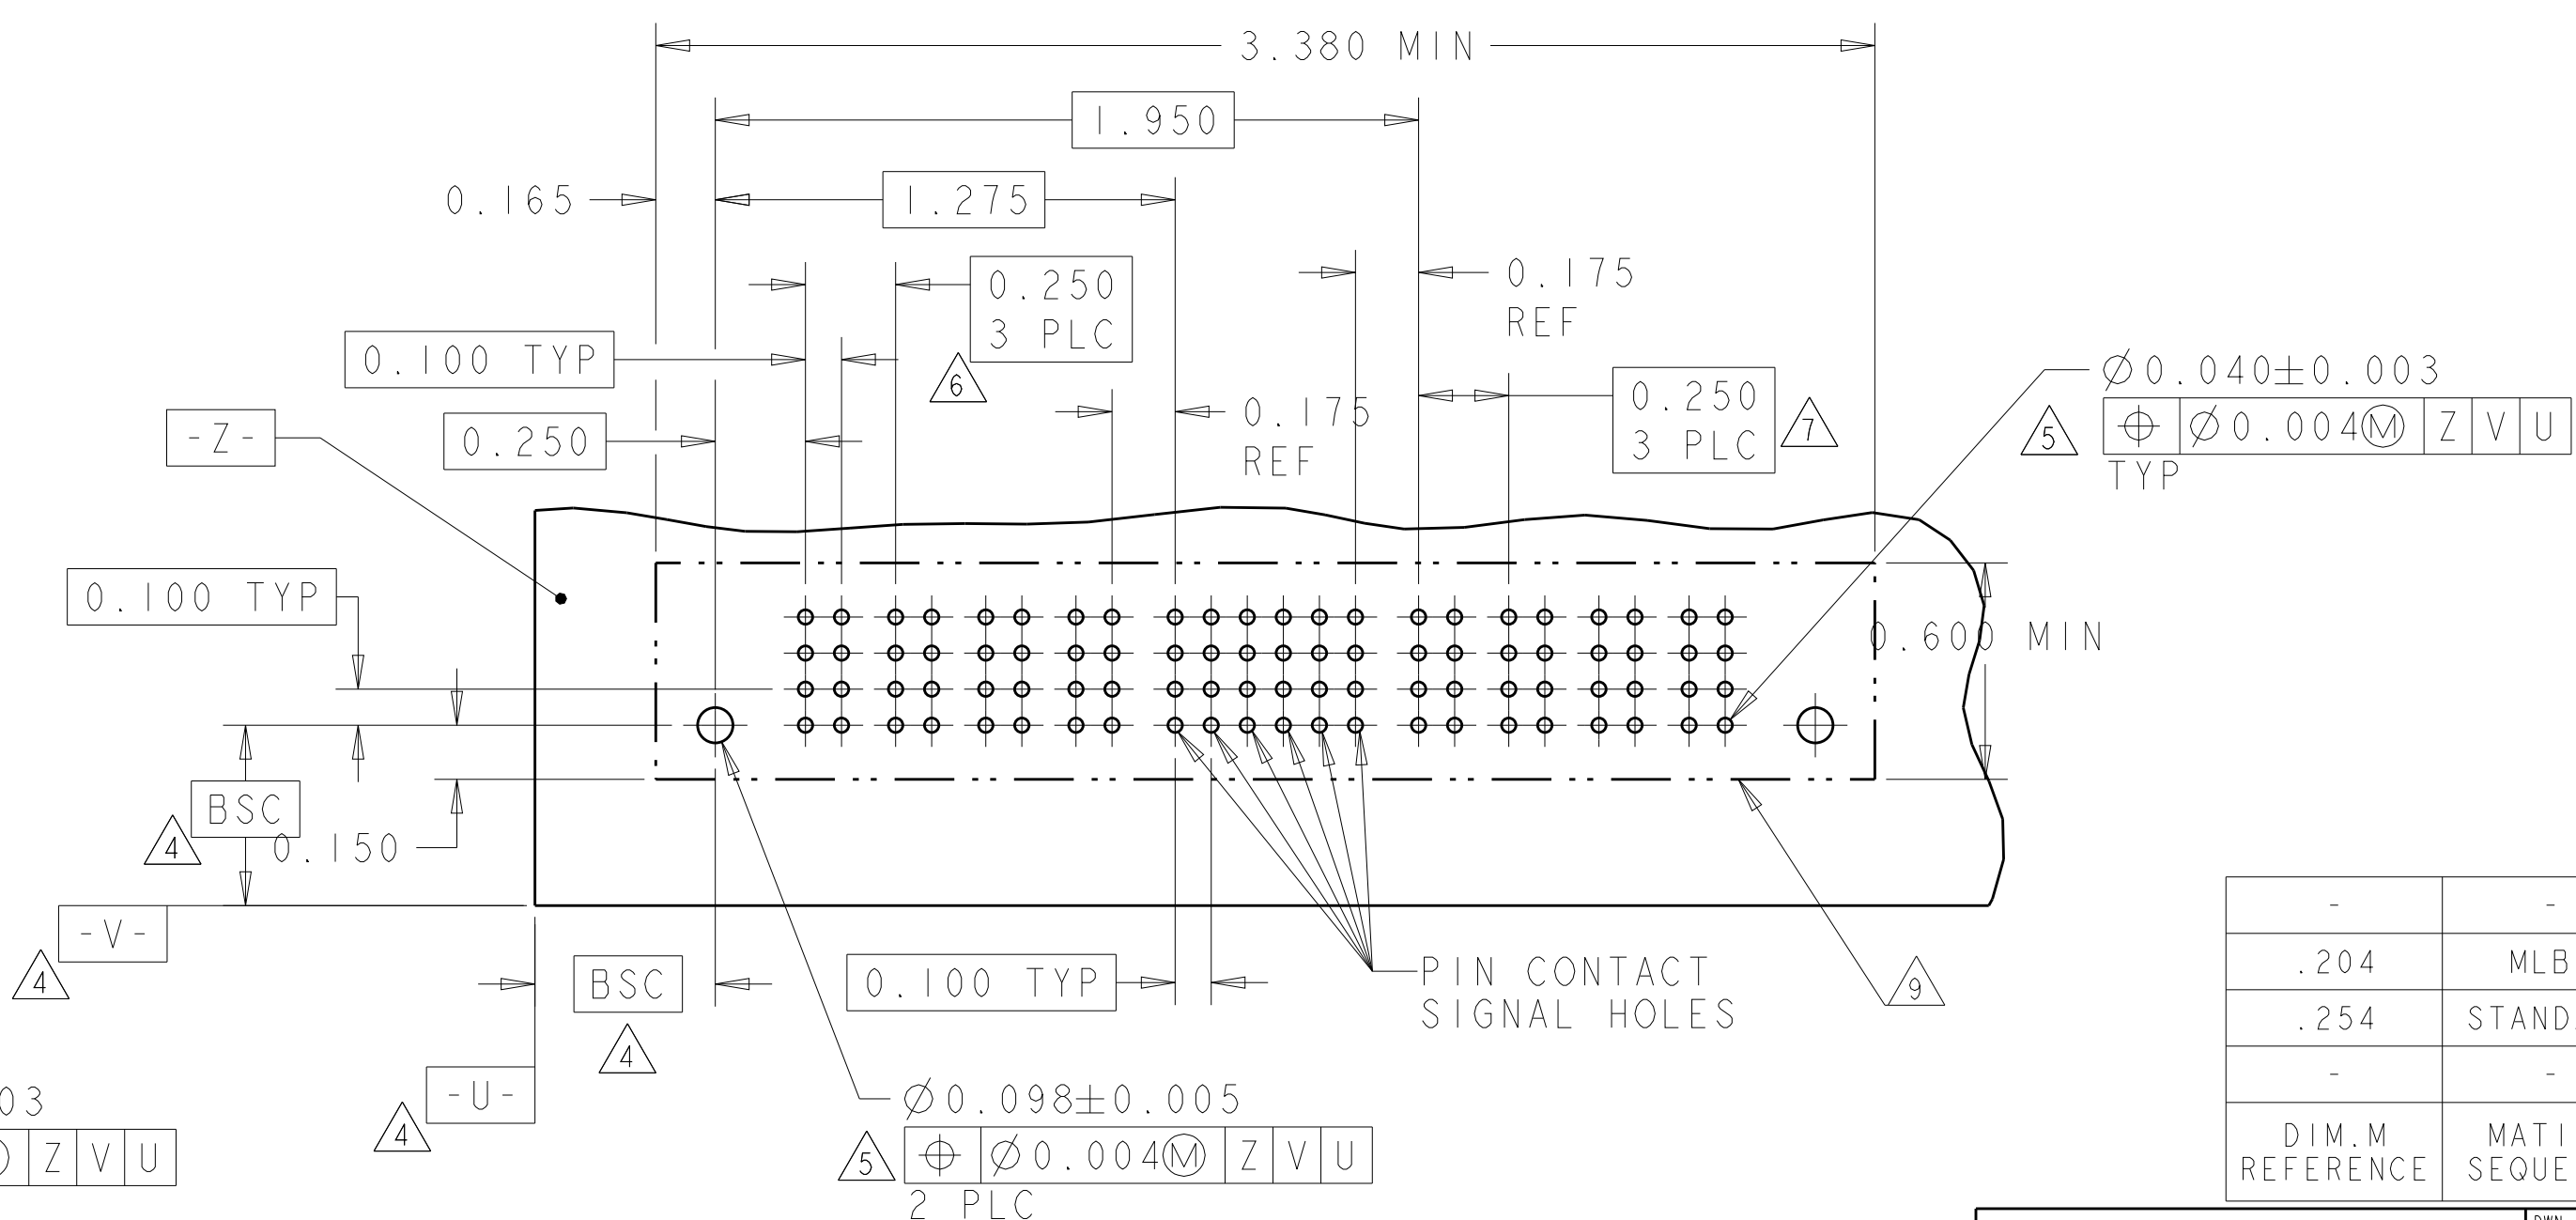
[illegible]

RECOMMENDED PCB LAYOUT 6600333-6
SCALE 2:1

-	-	RETENTION CLIP	HD
.204	MLBF	SIGNAL CONTACT .165 TAIL LENGTH	ES
.254	STANDARD	SIGNAL CONTACT .165 TAIL LENGTH	EV
-	-	POWER CONTACT .165 TAIL LENGTH	VM
DIM.M REFERENCE	MATING SEQUENCE	DESCRIPTION	IDENTIFIER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG: J. McCLINTON 23MAR2005 CHK: D. TROUT 23MAR2005 APP'D: B. WHYNE 23MAR2005		 TE Connectivity	
DIMENSIONS: INCH 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0.010 ±.010 0.005 ±.005 0.002 ±.002 ANGLES 42°		NAME: VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL PRODUCT SPEC: 108-1973 APPLICATION SPEC: 114-13038	
MATERIAL: - FINISH: -		WEIGHT: -		SIZE: - CASE CODE: - DRAWING NO: A100779 C=6600333 RESTRICTED TO: -	
Customer Drawing		SCALE: 3:1		SHEET 3 OF 22 REV P	

PART NUMBER	ROWS		POWER	SIGNAL				POWER	
			P1	1	2	3	4	P2	
6600333-9	D		VM	ES	EV	ES	EV	VM	
	C			EV	EV	EV	EV		
	B			ES	EV	ES	EV		
	A			ES	EV	ES	EV		
IP+16S+IP		HD							HD

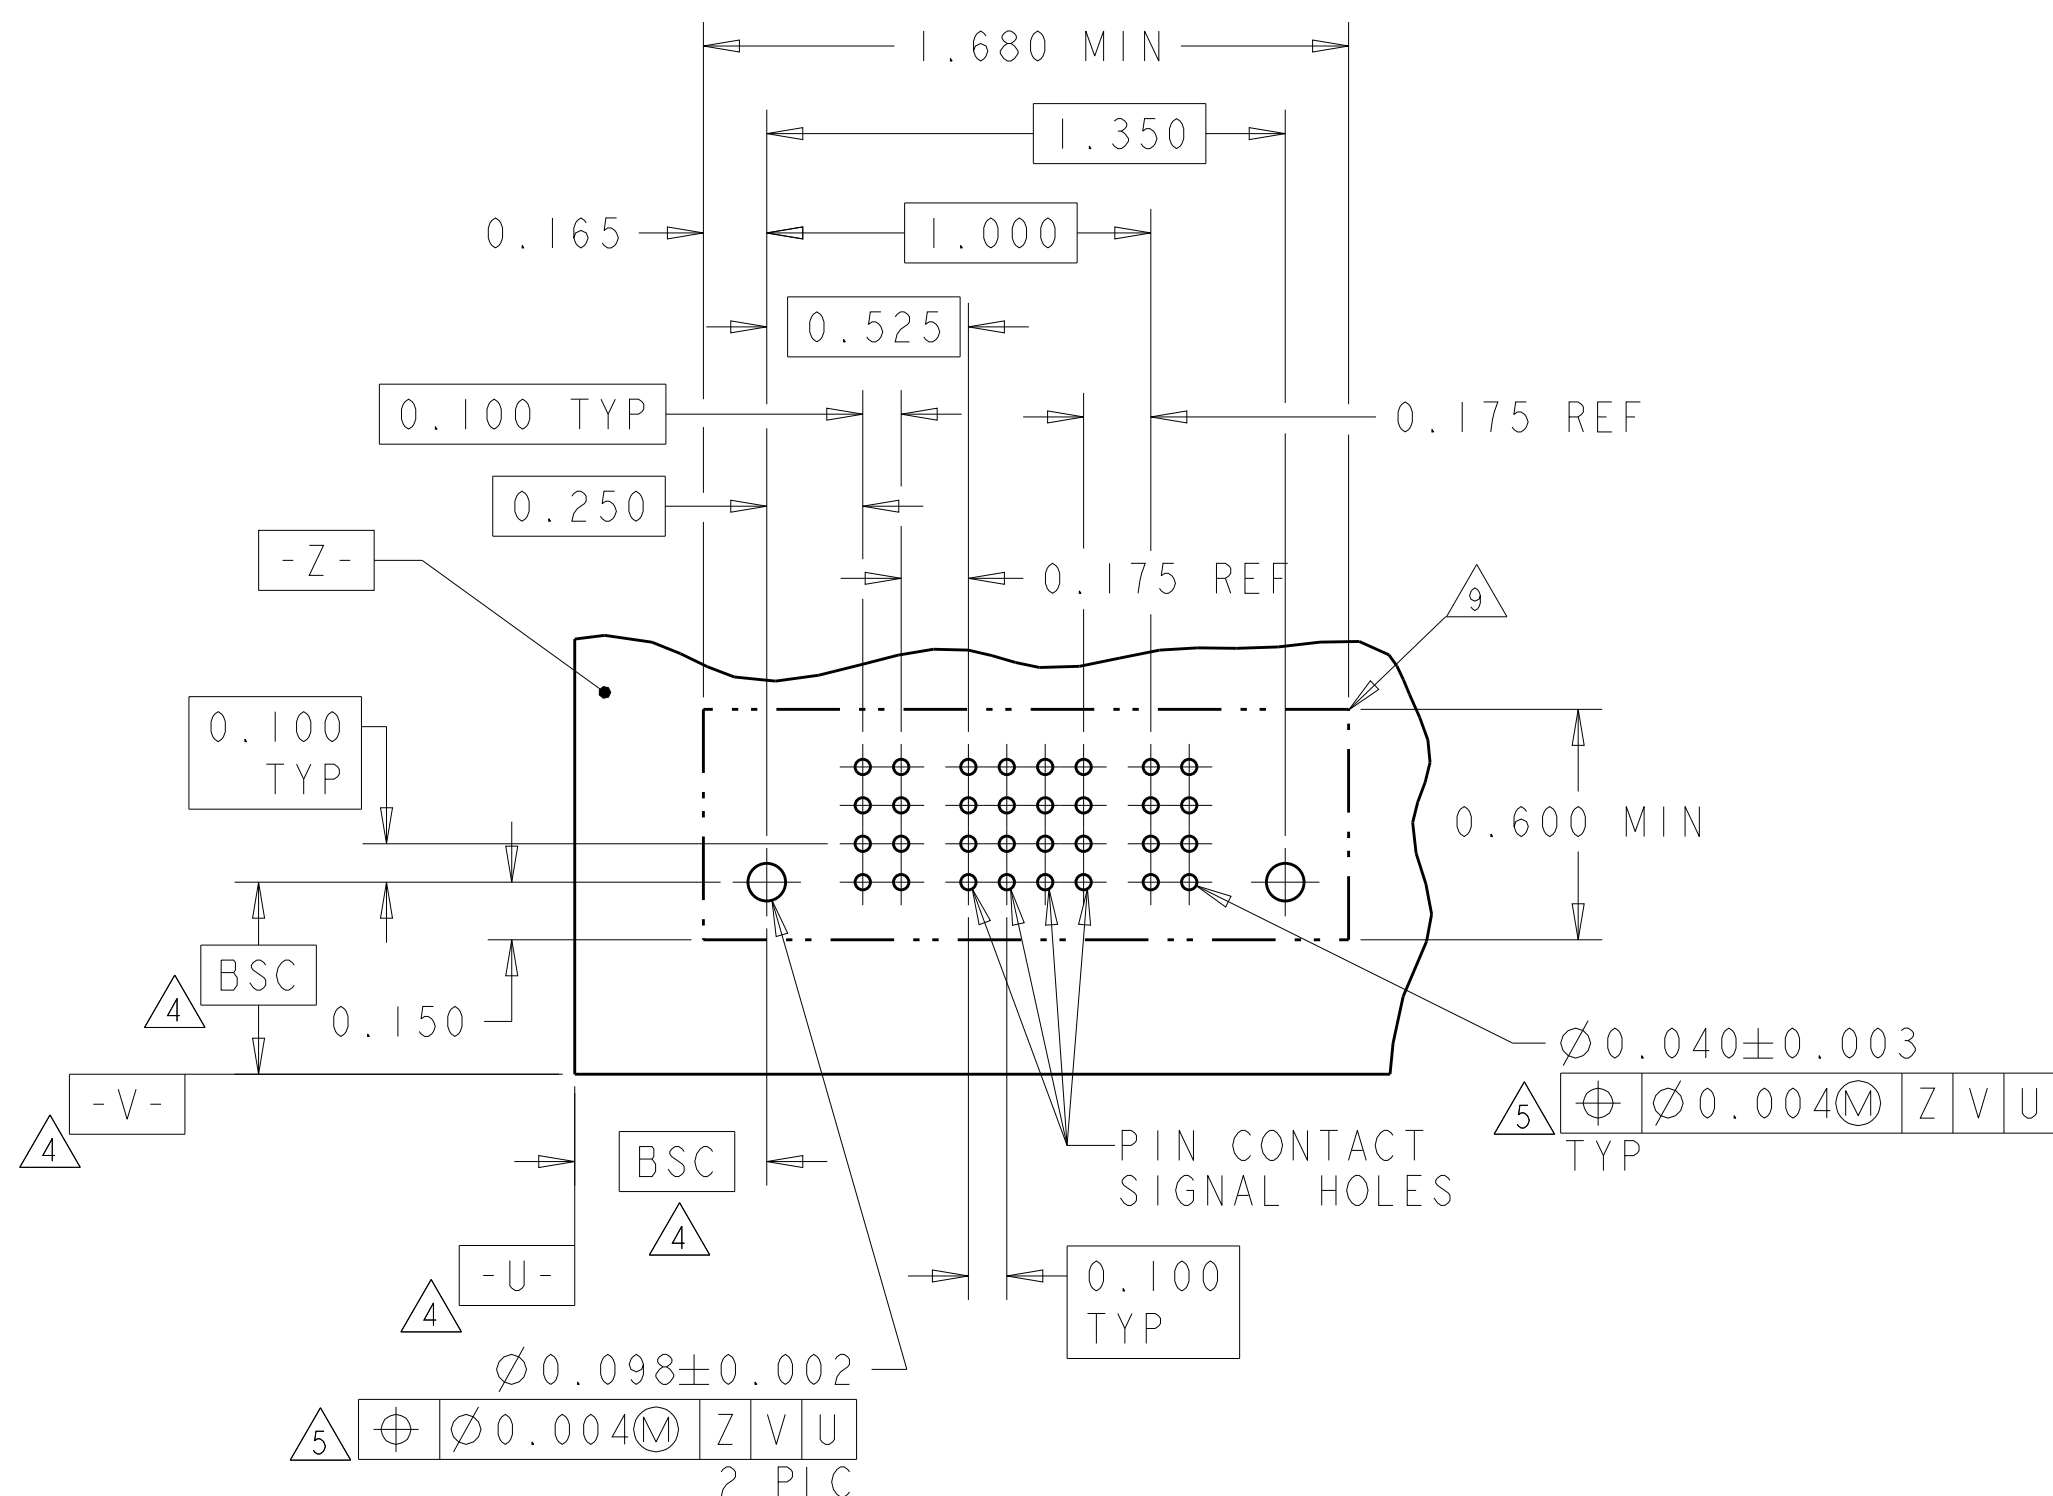


RECOMMENDED PCB LAYOUT 6600333-9
SCALE 2:1

PART NUMBER	ROWS		POWER	SIGNAL				POWER	
			P1	1	2	3	4	P2	
3-6600333-0	D		VM	ES	EV	EV	ES	VM	
	C			EV	EV	EV	EV		
	B			EV	EV	EV	EV		
	A			EV	EV	EV	EV		
IP+16S+IP		HD							HD




THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 23MAR2005 J. McCLENTON CHK 23MAR2005 D. TROUT APVD 23MAR2005 R. WHYNE		 TE Connectivity	
DIMENSIONS: INCH		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.01 3 PLC ±0.005 4 PLC ±0.0020		NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		SIZE A1	
MATERIAL -		FINISH -		CAGE CODE 6600333	
		WEIGHT -		DRAWING NO 22	
		Customer Drawing		SCALE 3:1 SHEET 4 OF 22 REV P7	

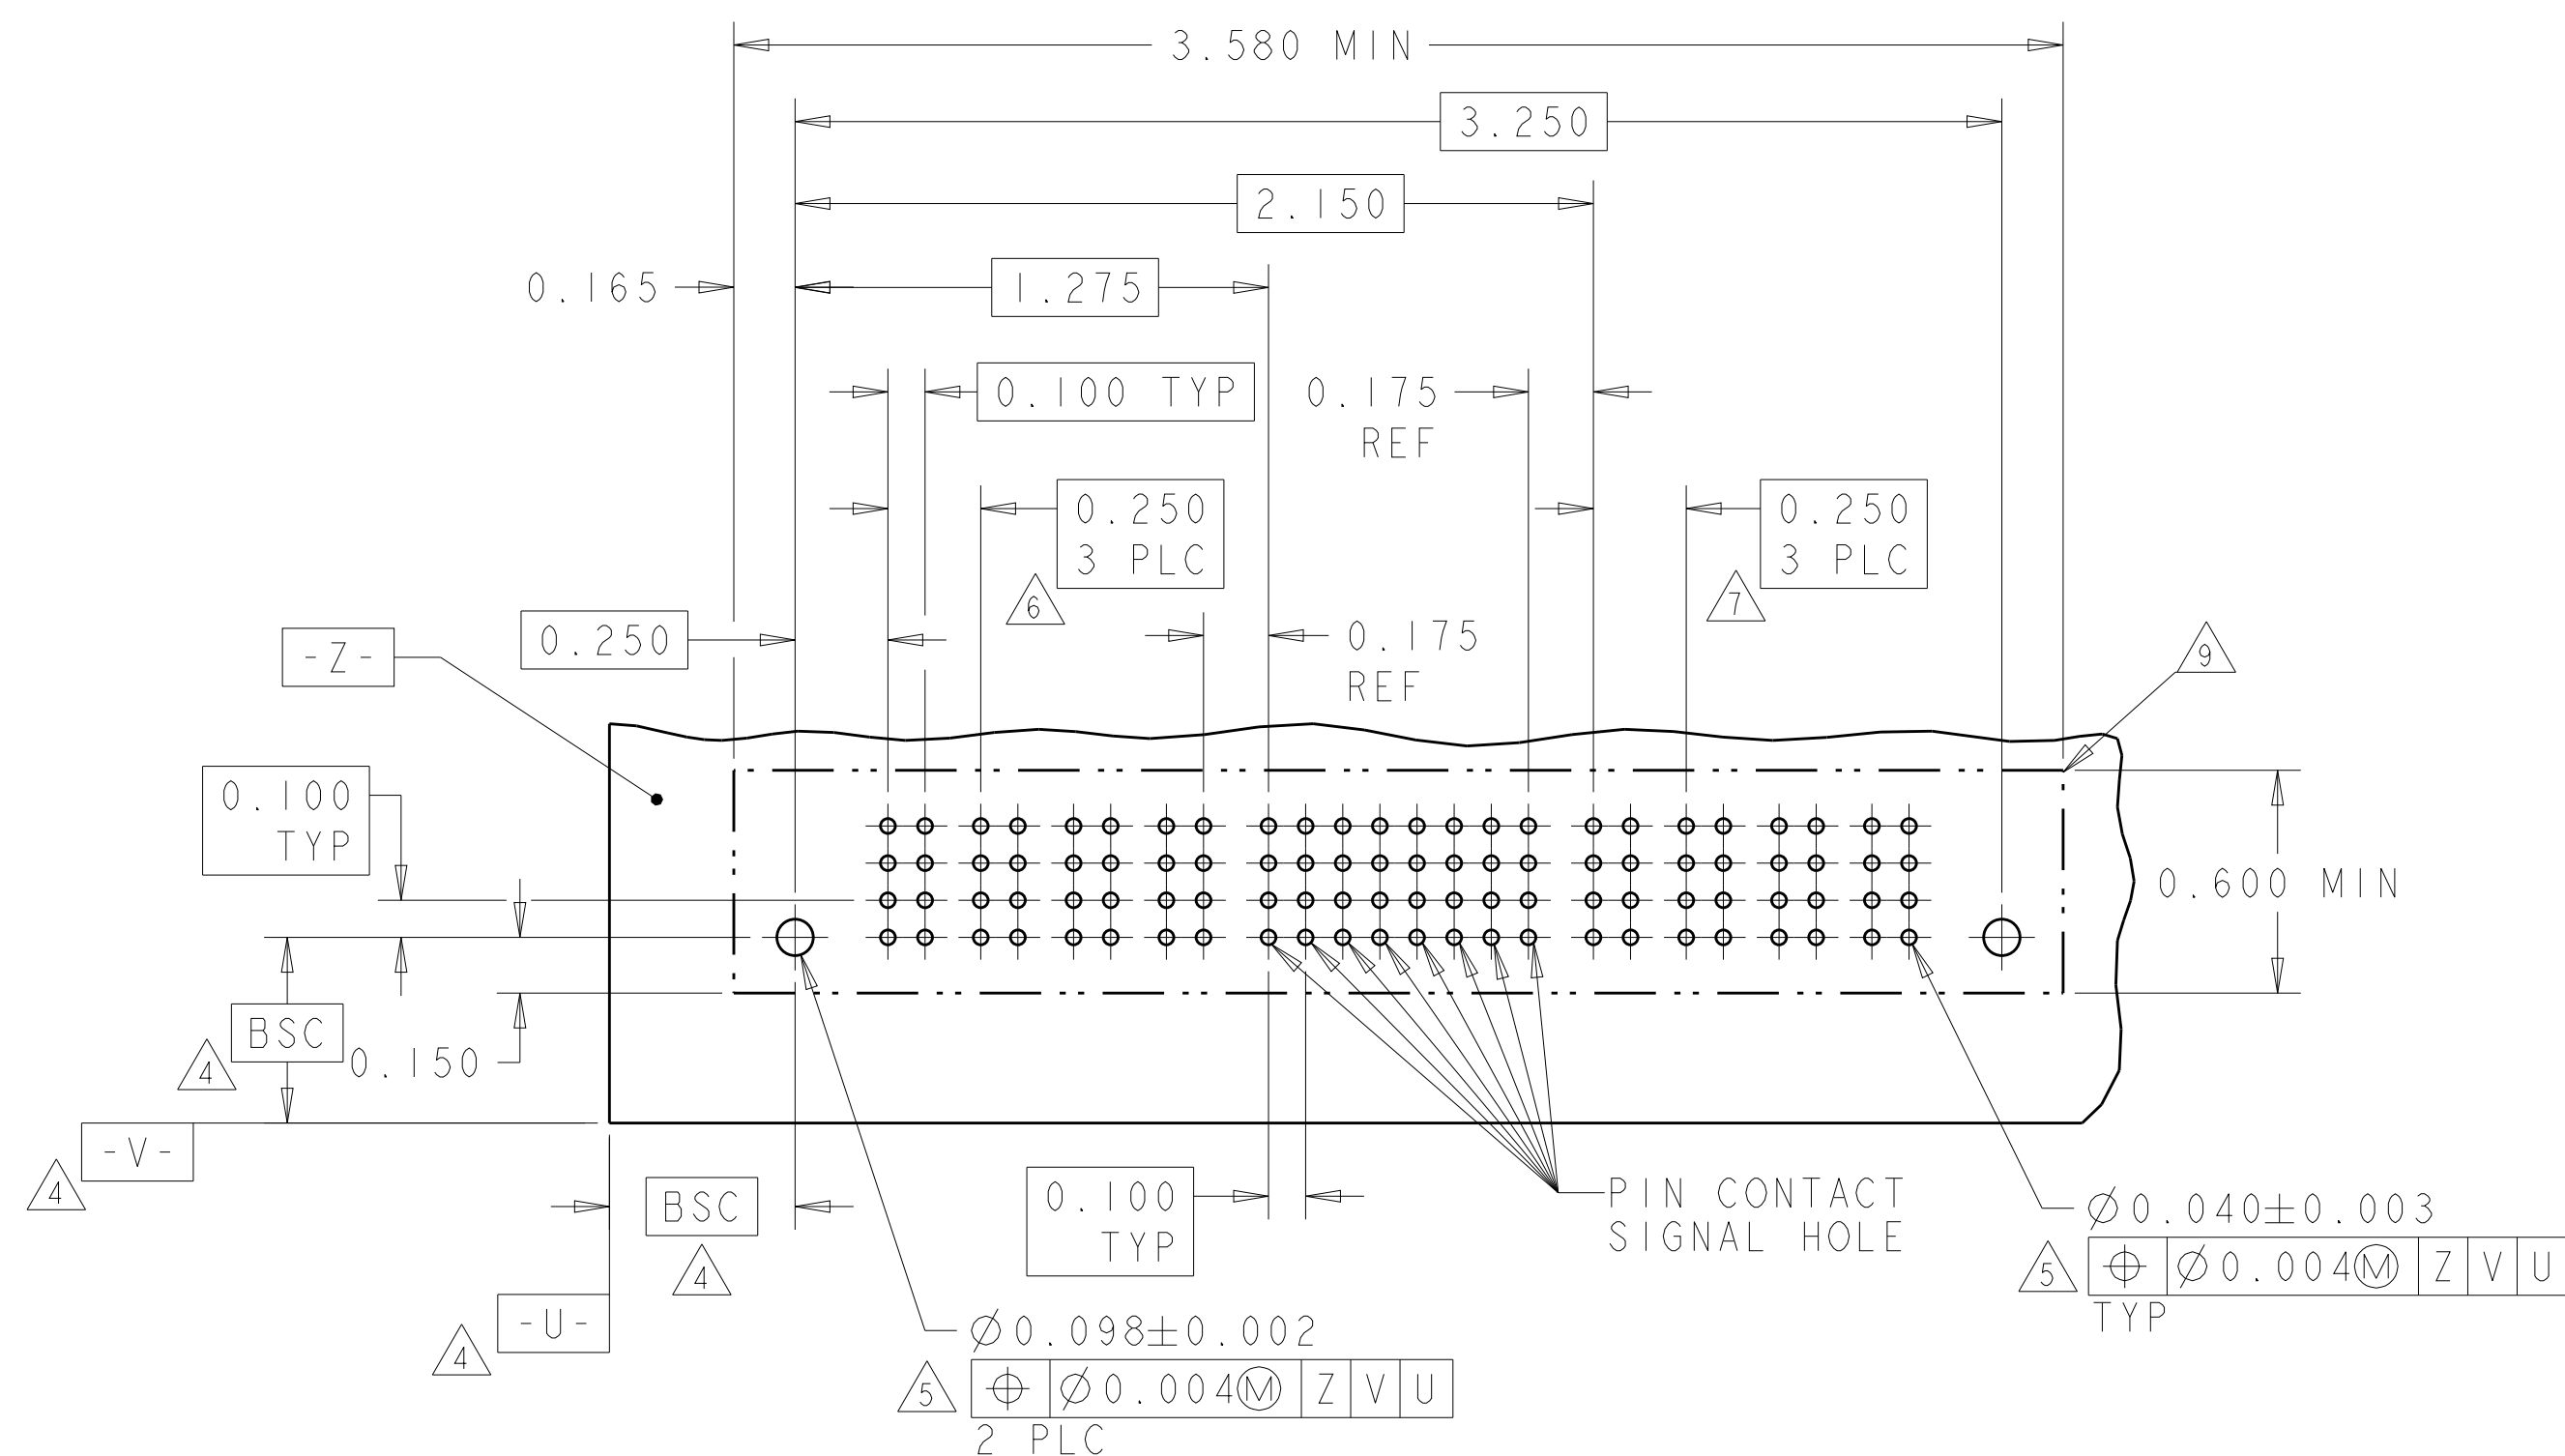
[illegible]

RECOMMENDED PCB LAYOUT 1-6600333-4
SCALE 2:1


PART NUMBER	ROWS		POWER						SIGNAL						POWER						
			P1	P2	P3	P4	P5	P6	I	2	3	4	5	6	P7	P8	P9	P10	P11	P12	
I-6600333-5	D		VM	VM	VM	VM	VM	VM	EV		EV	EV	EV	EV	VM	VM	VM	VM	VM	VM	
	EV									EV	EV	EV	EV								
	B									EV	EV	EV	EV								
	A									EV	EV	EV	ES								
6P+24S+6P		HD																			HD

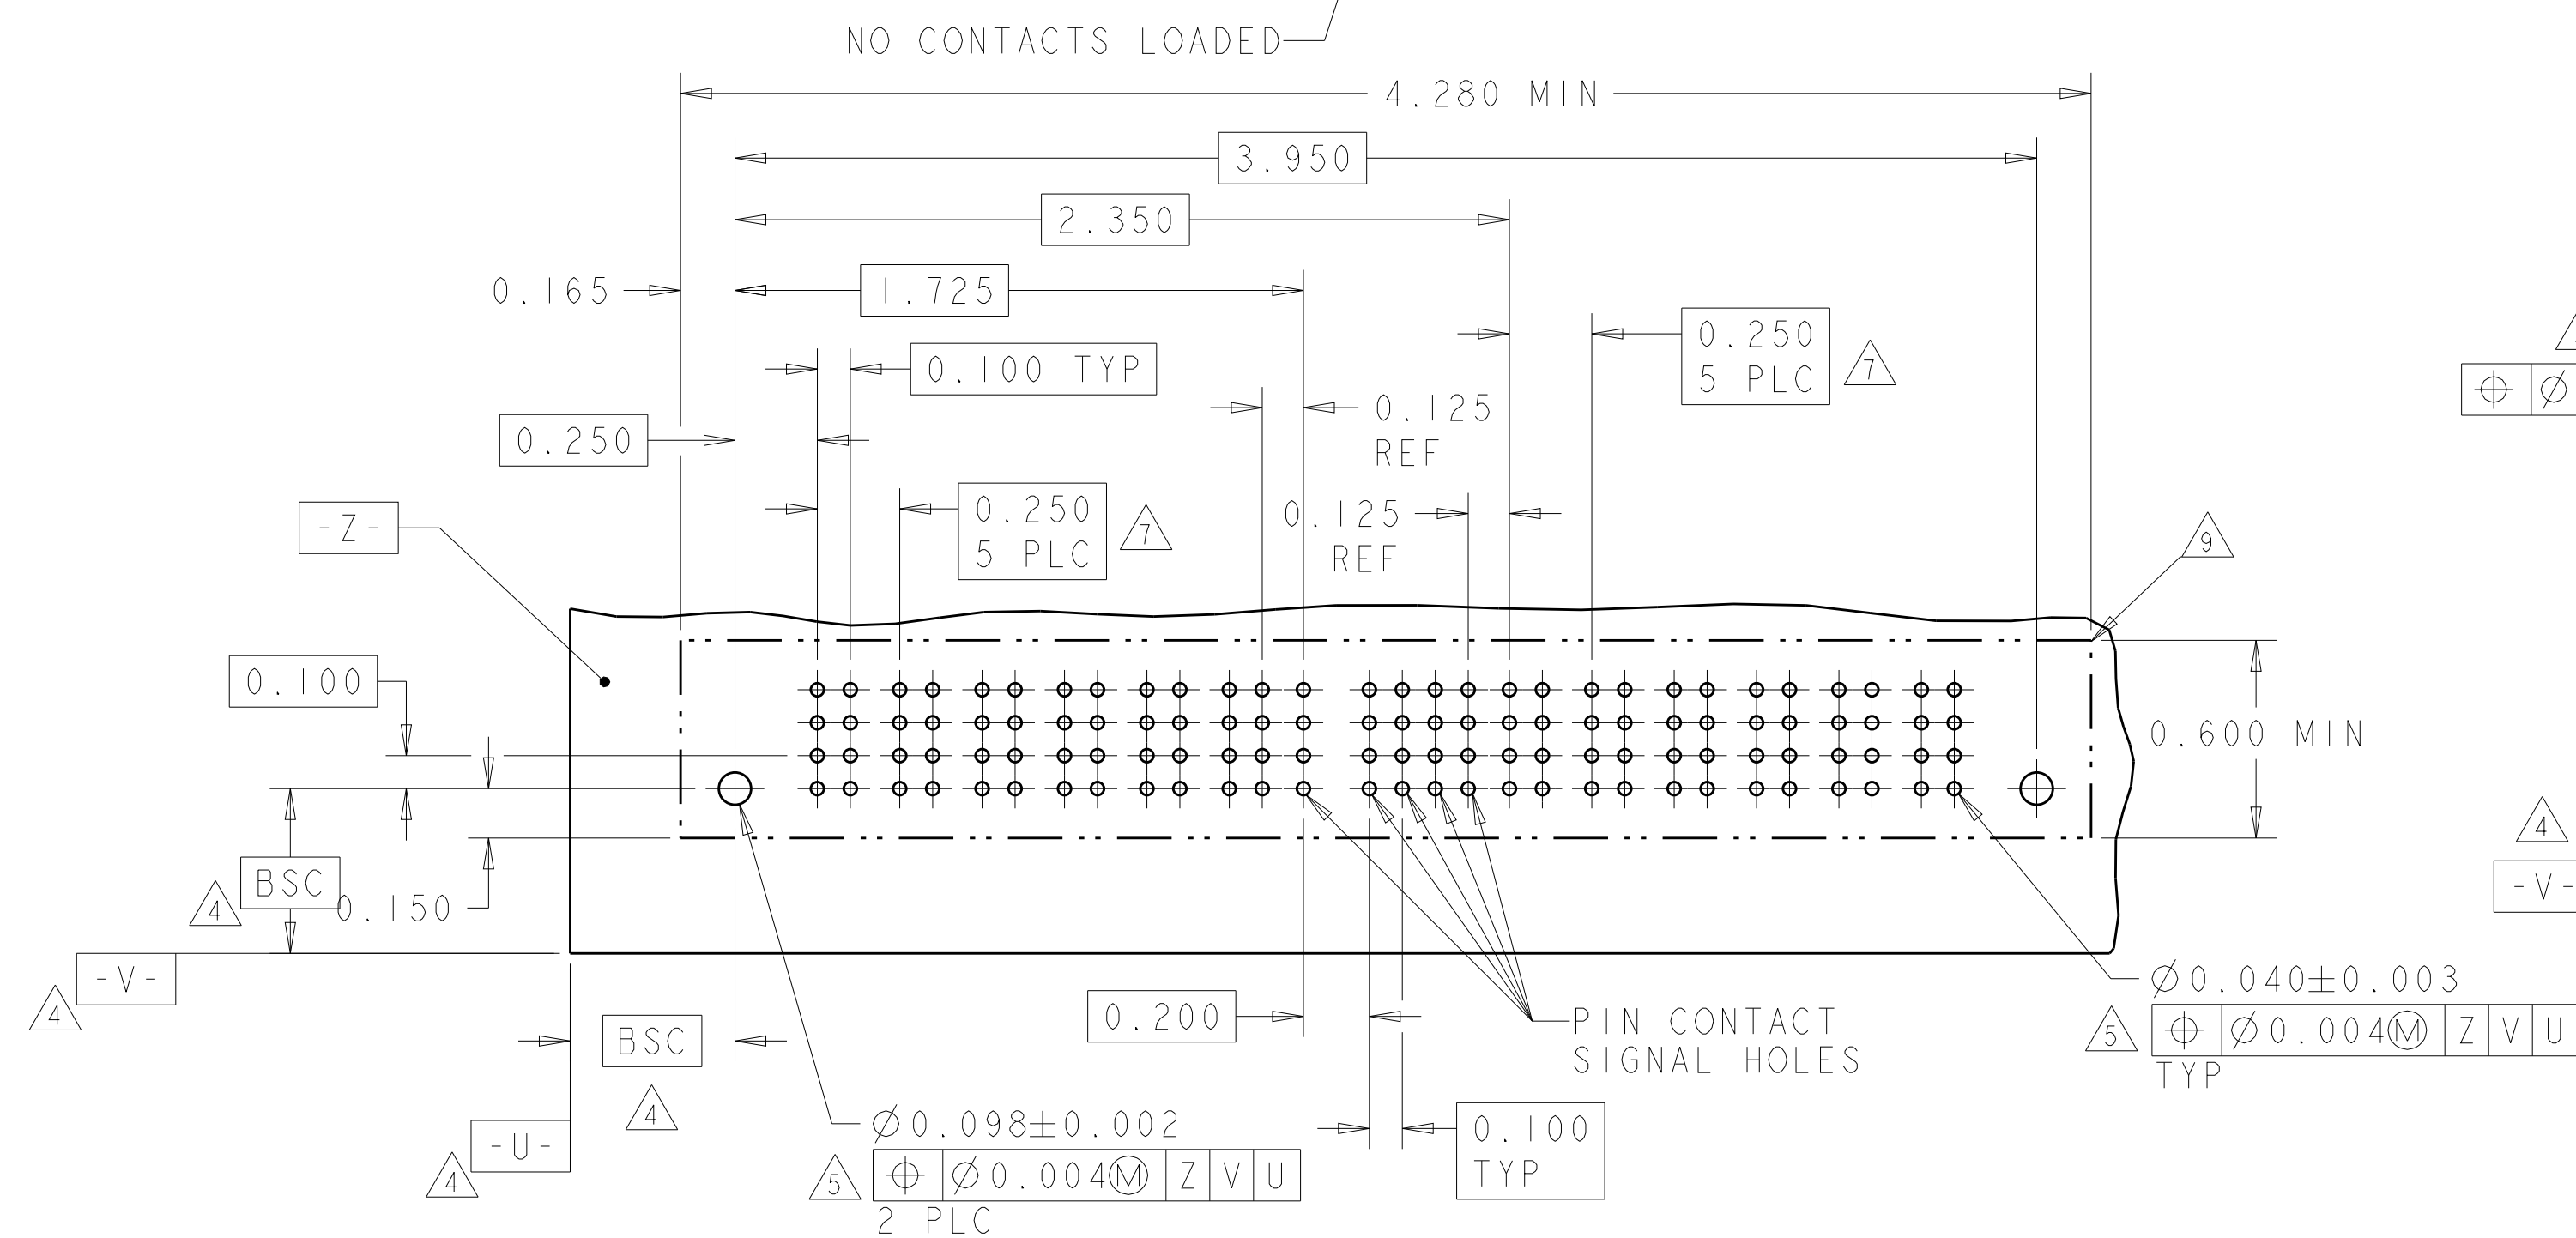

RECOMMENDED PCB LAYOUT 1-6600333-5
SCALE 2:1

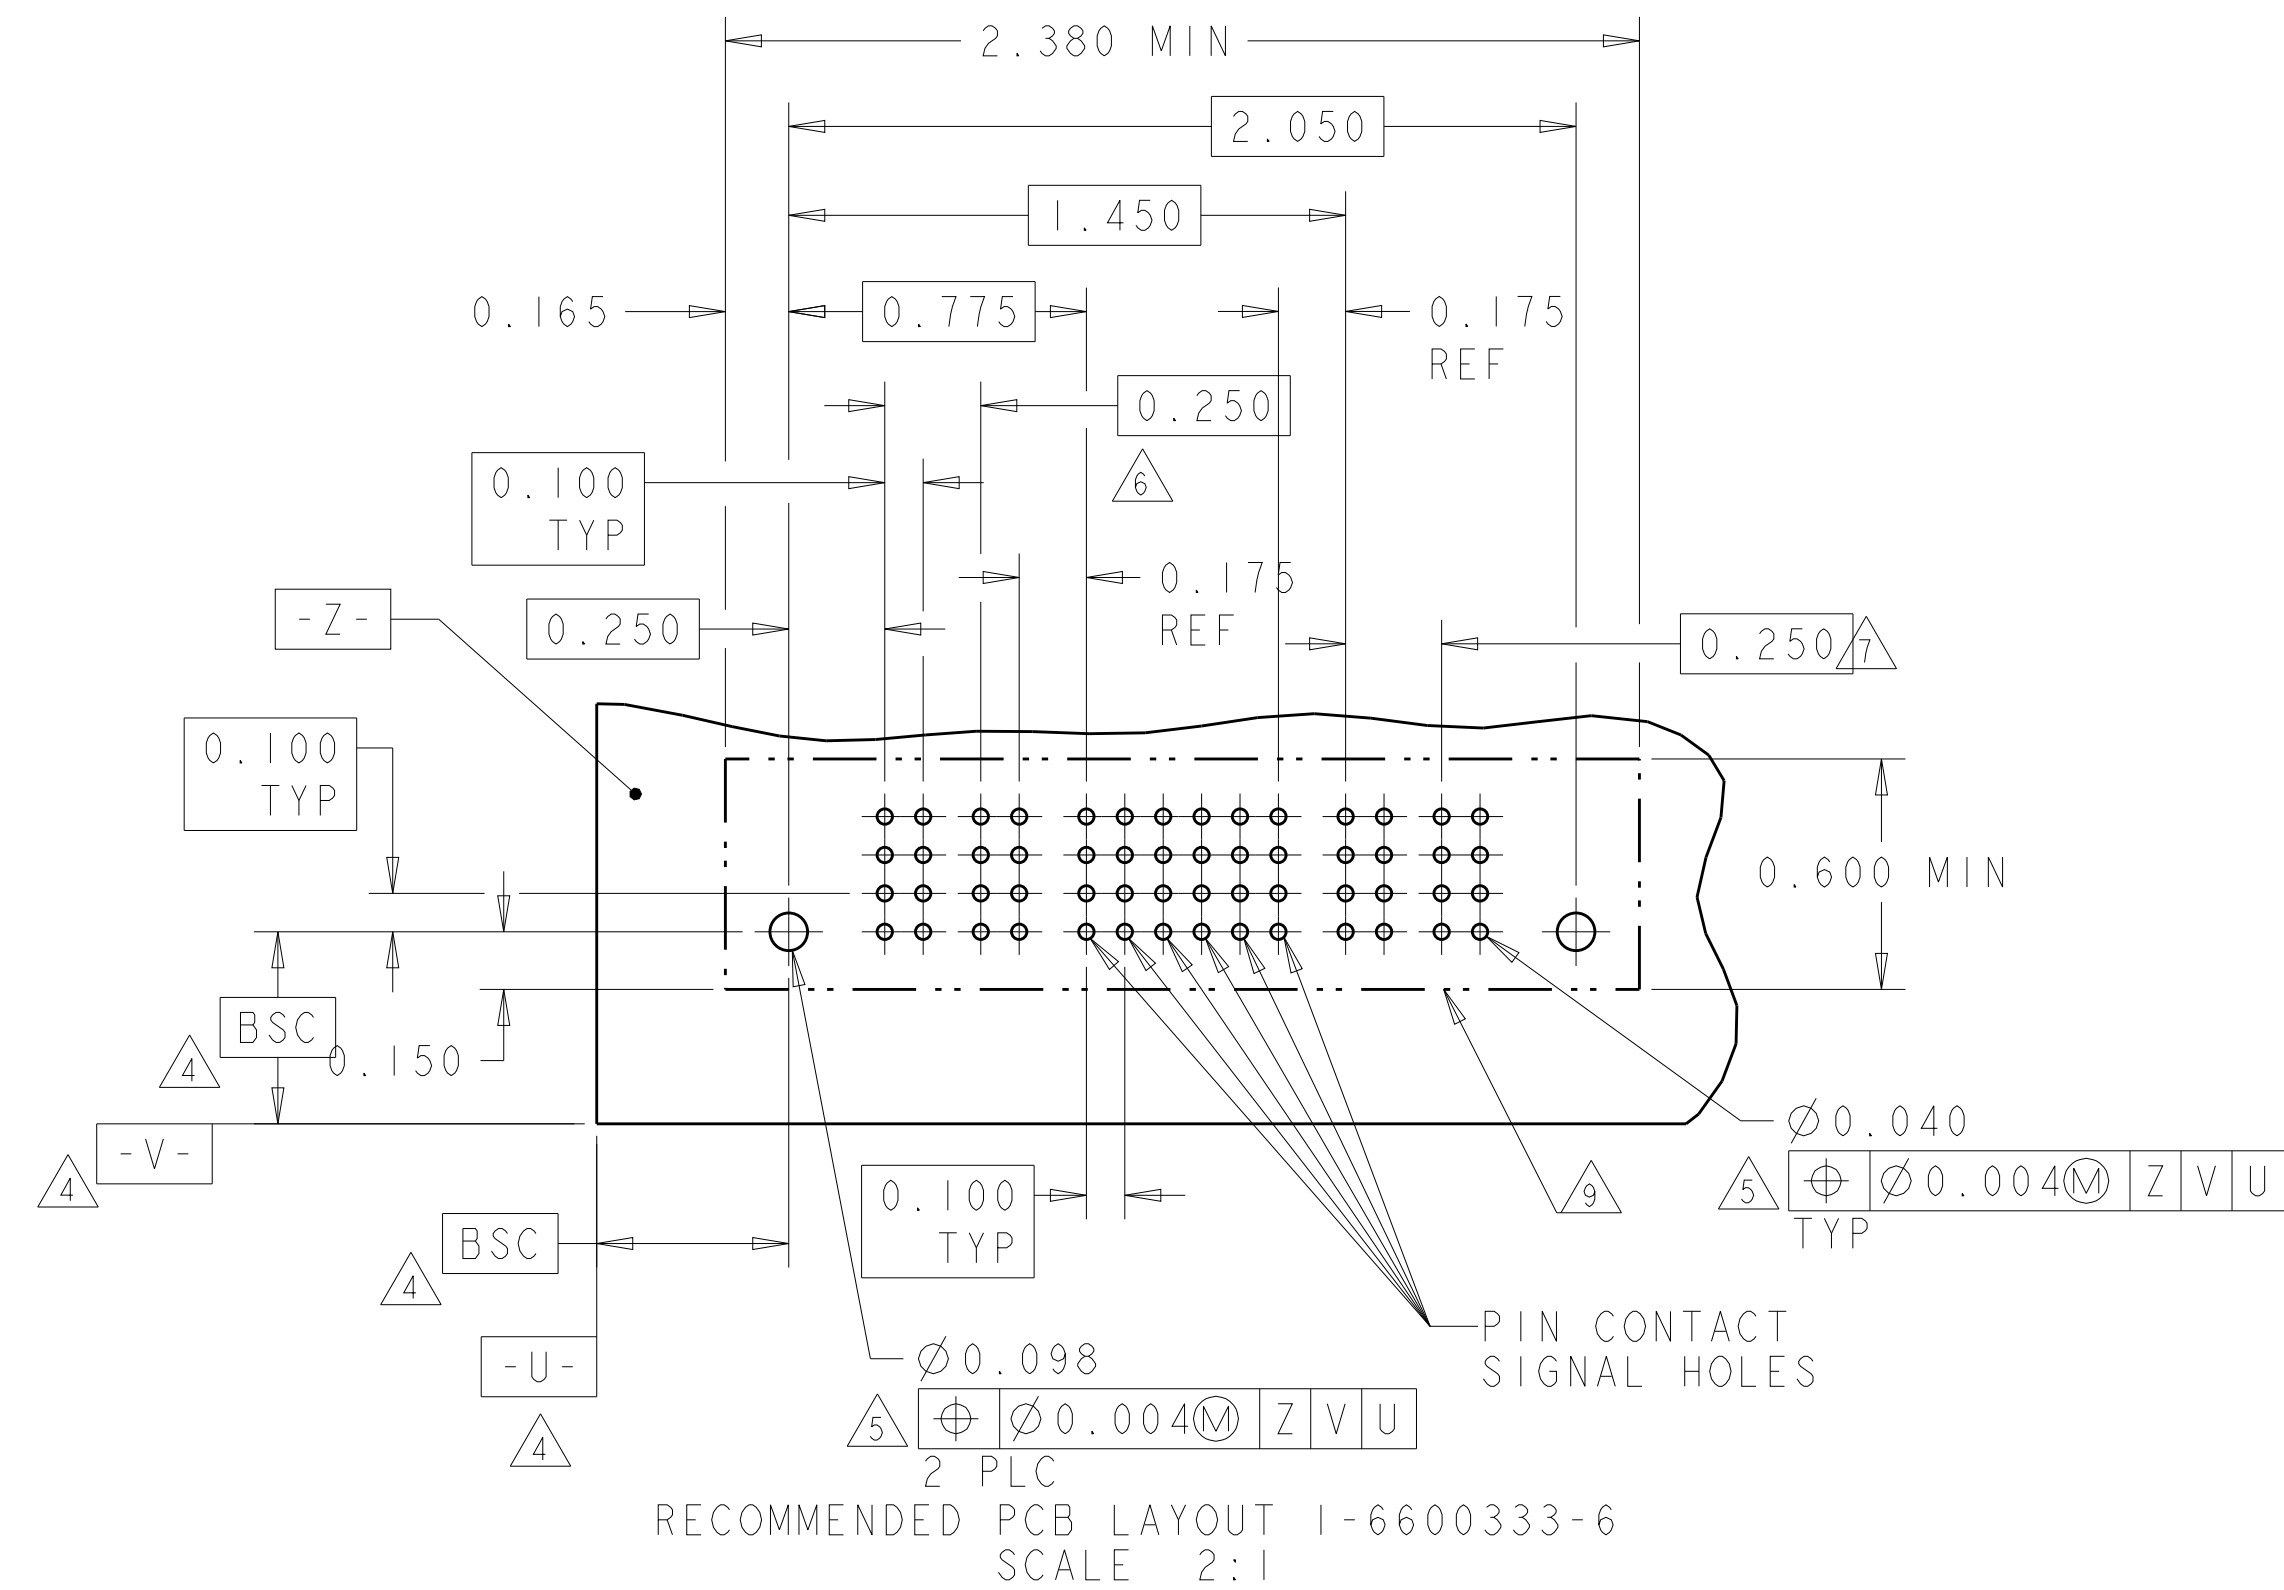[illegible]

PART NUMBER	ROWS		POWER						SIGNAL						POWER																																																																																																																																																																																																																																																																																																																					
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11	P12	P13	P14																																																																																																																																																																																																																																																																																																														
2-6600333-1	D C B A	 HD	 VM	 VM	 VM	 VM	 	 VM	 EV	 EV	 EV	 EV	 EV	 EV	 	 	 VM	 VM	 	 	 VM	 VM	 	 	 ES	 ES	 EV	 EV	 EV	 EV	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	

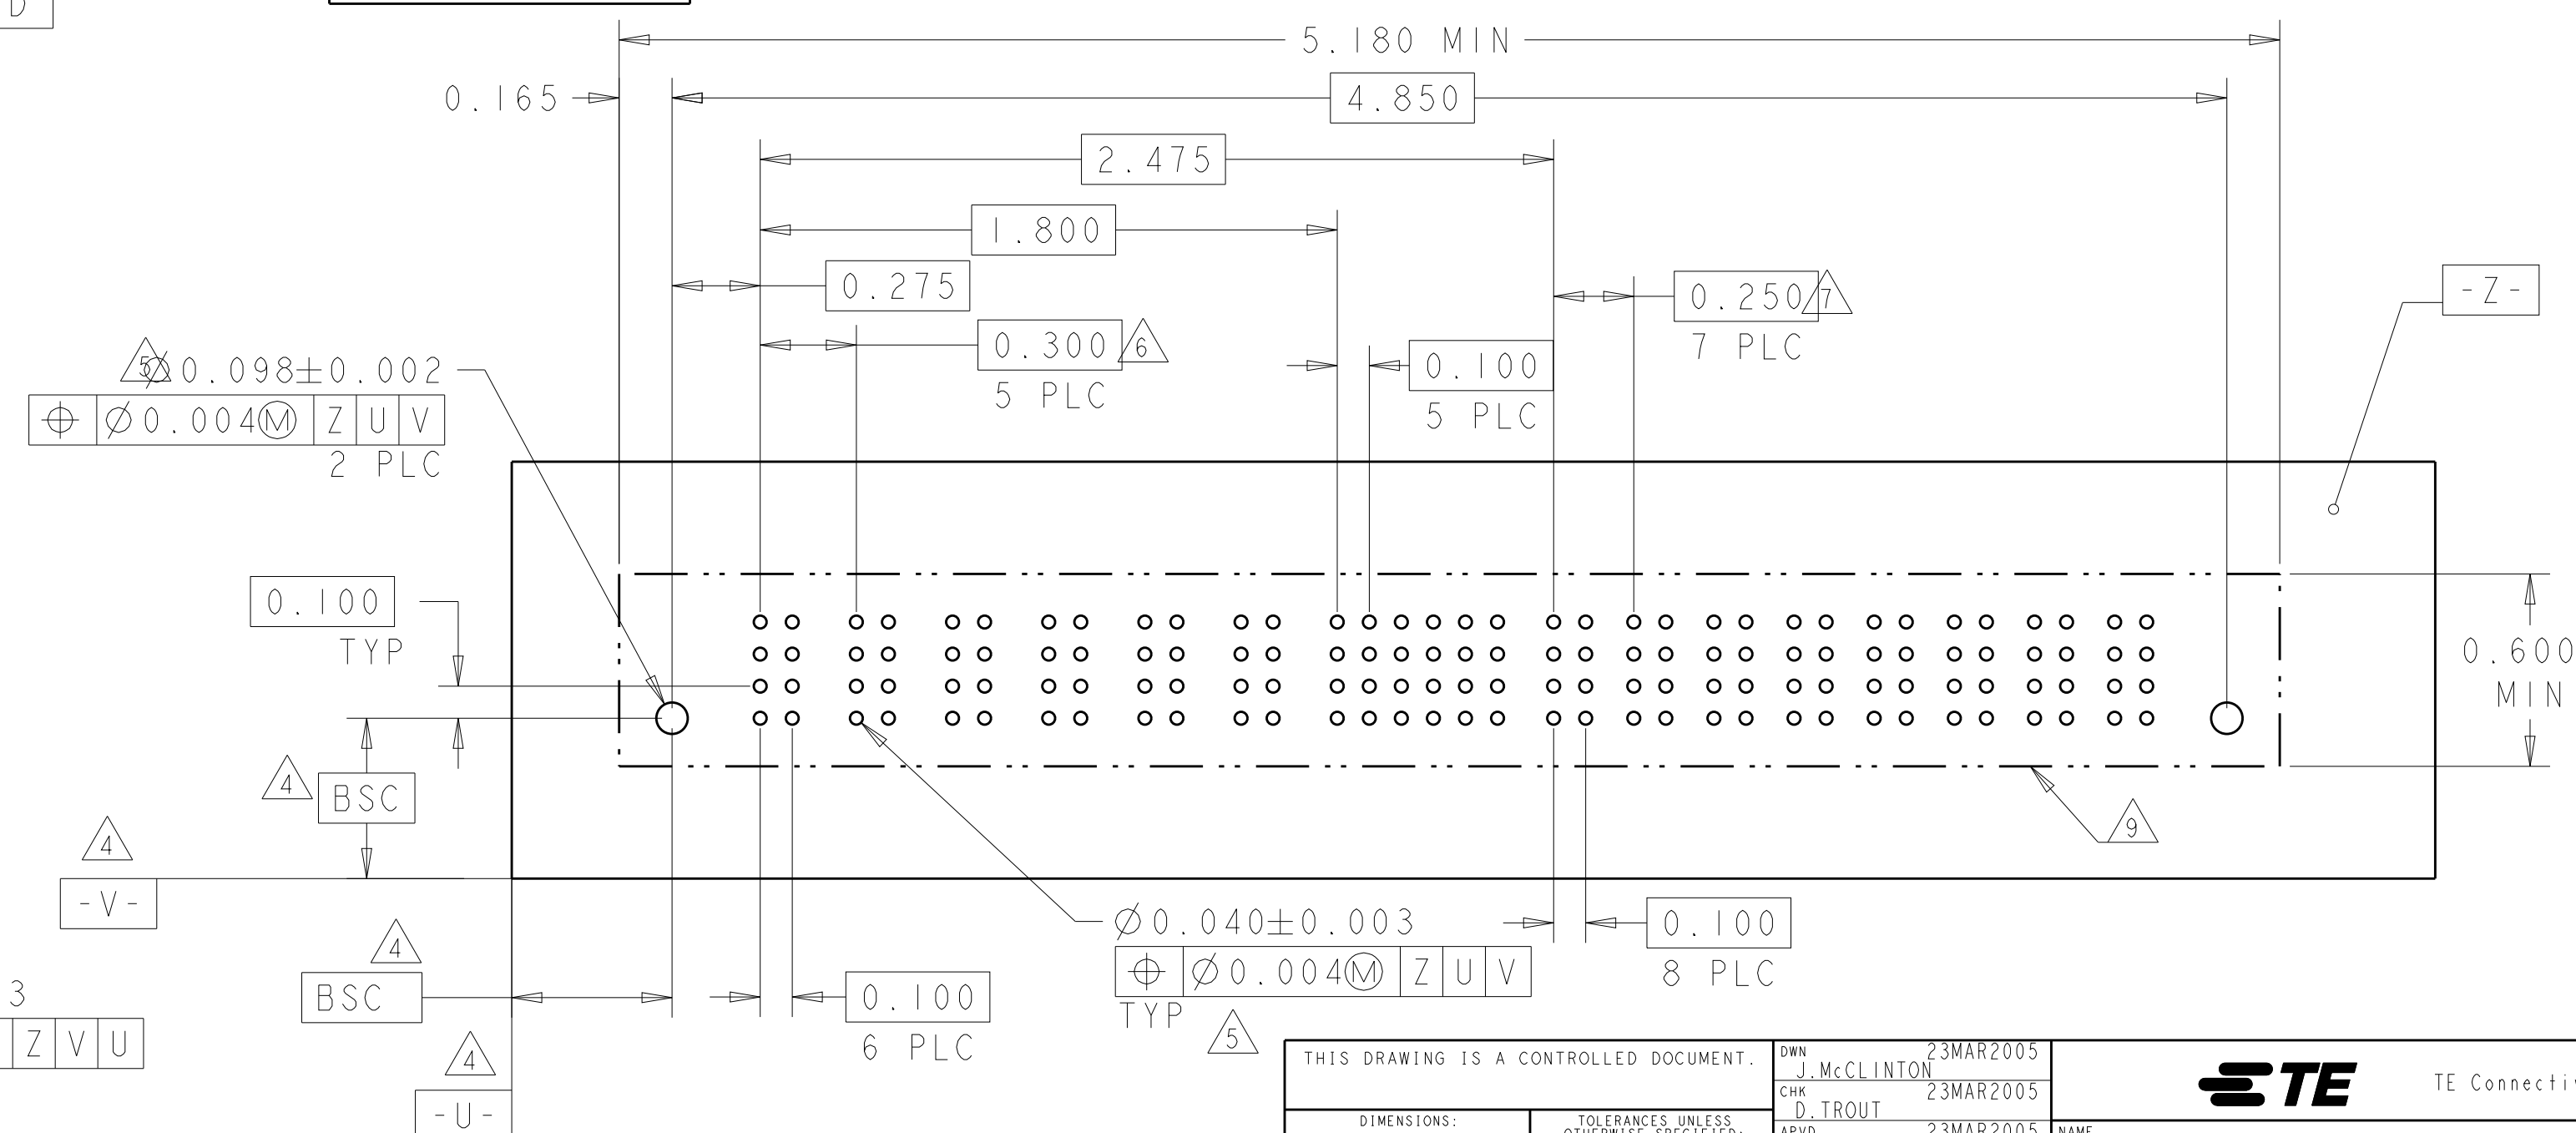

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 23MAR2005 J. McCLINTON CHK 23MAR2005 T. TROUT R. WHYNE 23MAR2005	 TE Connectivity	
DIMENSIONS: INCH 		TOLERANCES UNLESS OTHERWISE SPECIFIED: PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL
MATERIAL -		FINISH -	WEIGHT -	SIZE A1
		CUSTOMER DRAWING NO C=6600333		RESTRICTED TO -
		SCALE 3:1		SHEET 6 OF 22
		REV P2		


THE PART NUMBER 2-6600333-4 PCB LAYOUT IS SAME AS 2-6600333-2

4805 (3/11)


[illegible]4805 (3/11)

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-


PART NUMBER	ROWS		POWER				SIGNAL				POWER			
			P1	P2	P3	P4	1	2	3	4	P5	P6	P7	
2-6600333-5	D		VM	VM	VM	VM	EV	EV	EV	EV	VM	VM	VM	
	C						EV	EV	EV	EV				
	B						EV	EV	EV	EV				
	A						ES	EV	EV	EV				
4P+16S+3P		HD												HD

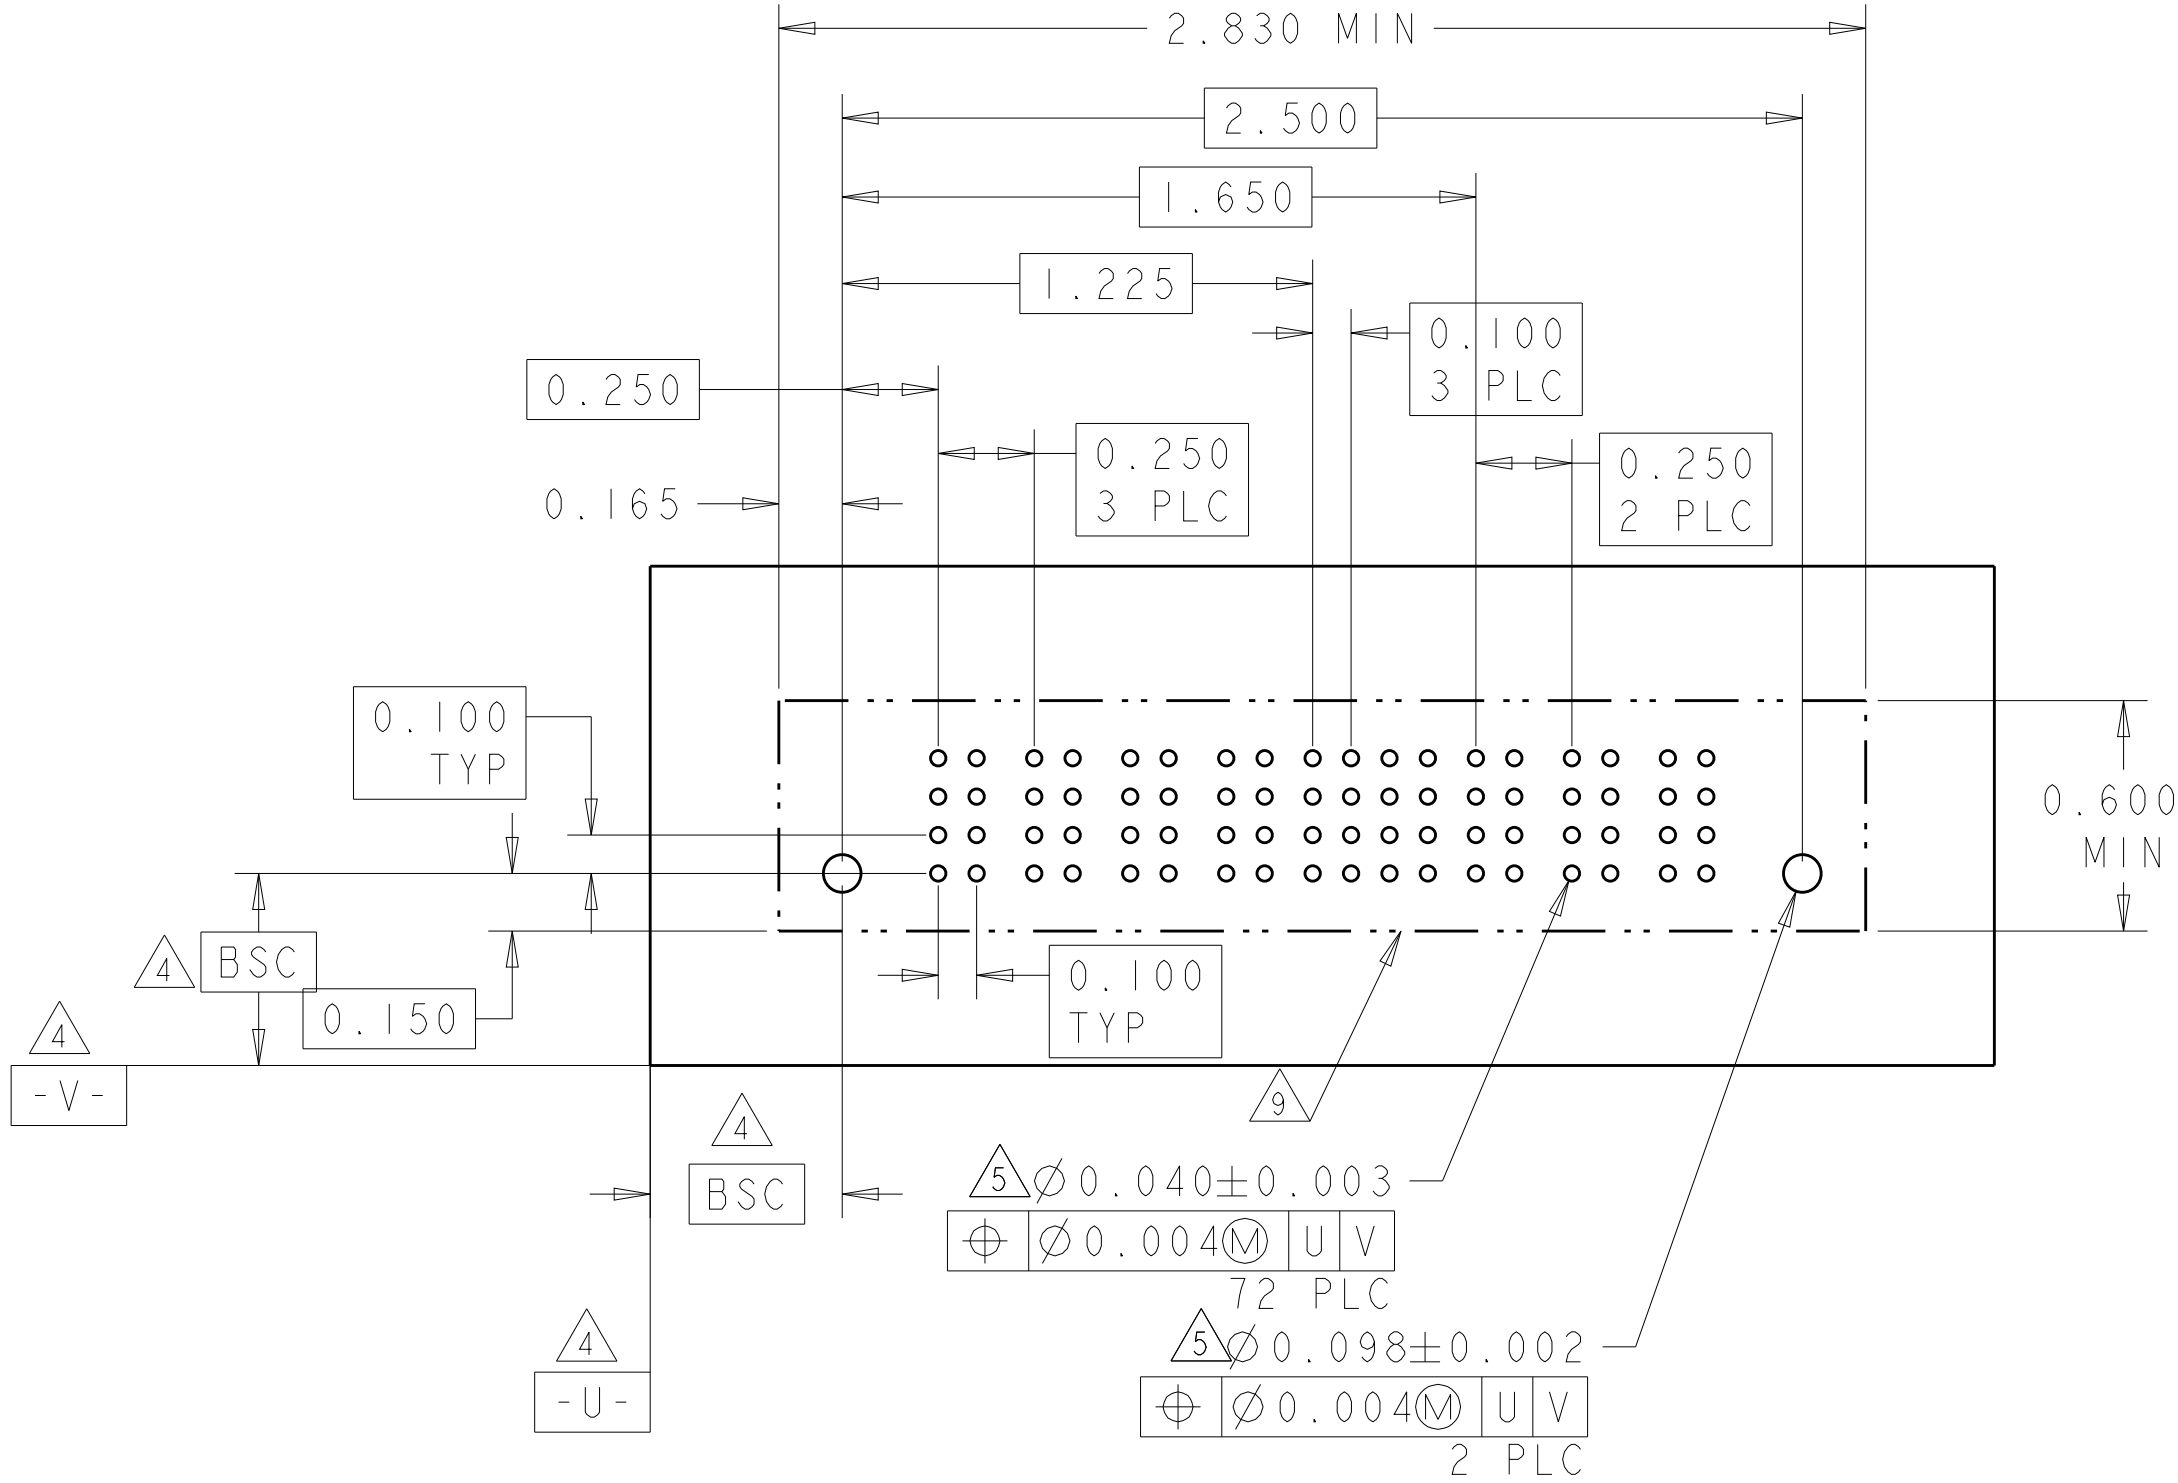

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
2-6600333-6	D		VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					ES	EV	EV	EV	EV	EV				
3P+24S+3P		HD													HD

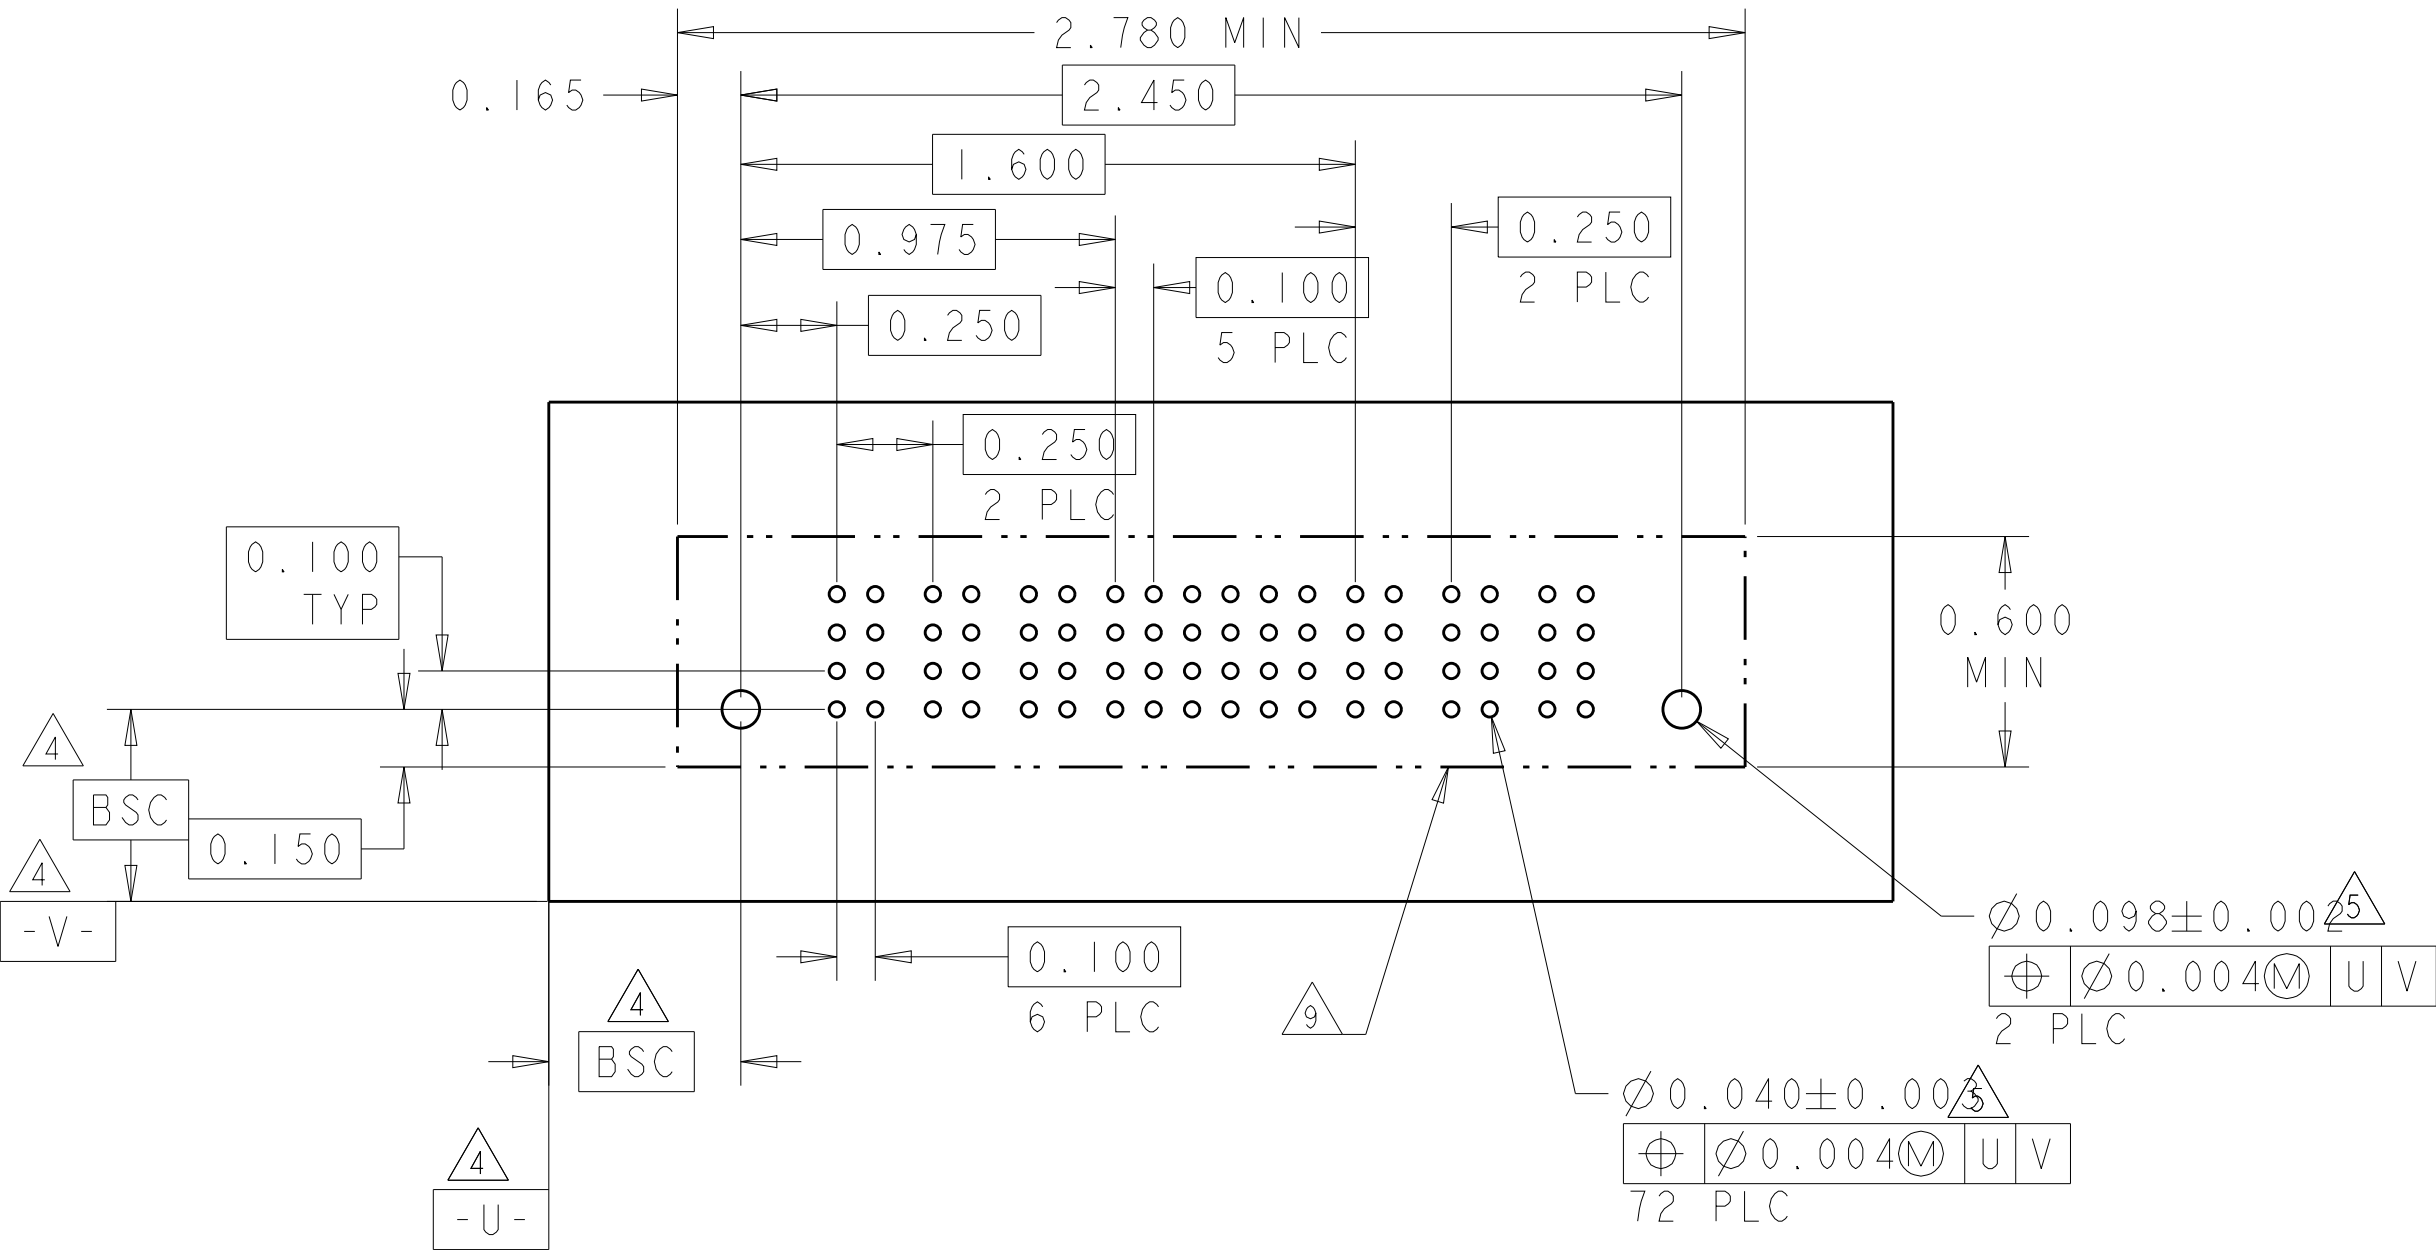

PART NUMBER	ROWS		POWER				SIGNAL						POWER					
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	P9	
2-6600333-7	D		VM	VM	VM	VM	ES	EV	ES	EV	EV		VM	VM	VM	VM	VM	
	C						EV	EV	EV	ES	EV							
	B						EV	ES	EV	EV	EV							
	A						ES	ES	EV	EV	ES							
4P+24S+5P		HD																HD

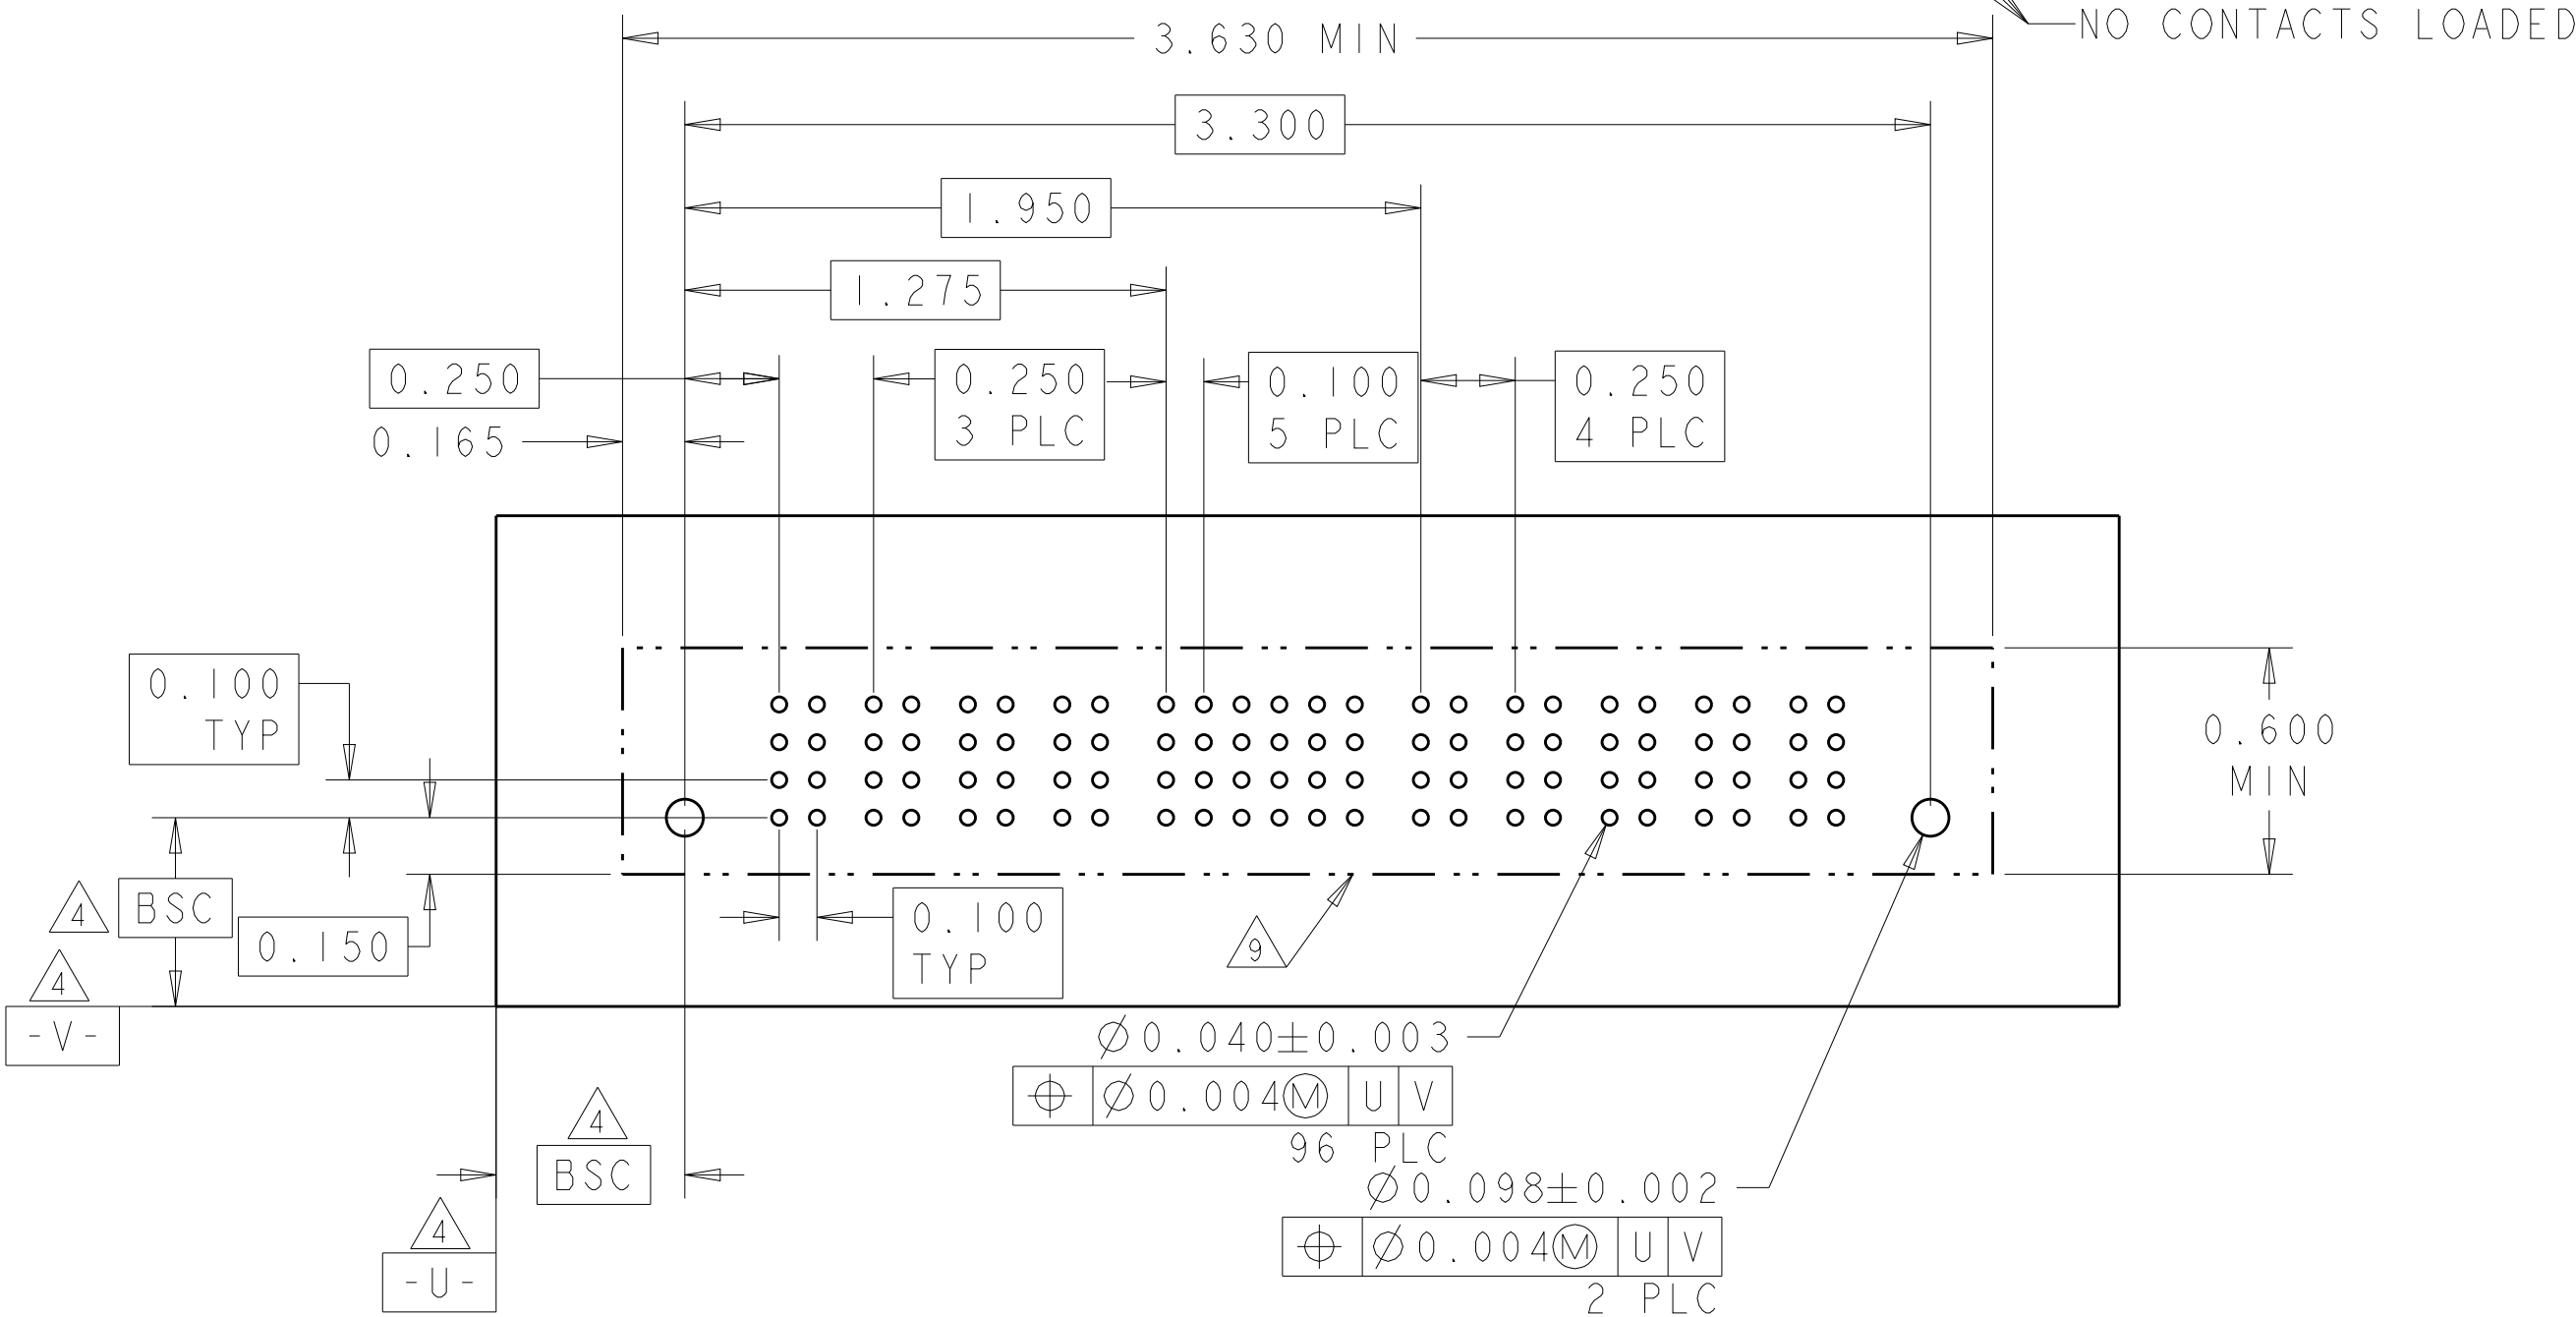

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN J. McCLINTON 23MAR2005
CHK D. TROUT 23MAR2005
APVD R. WHYNE 23MAR2005

DIMENSIONS:
INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

WEIGHT

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

SIZE
A100779

CAGE CODE
DRAWING NO
C=6600333

RESTRICTED TO

SCALE
3:1


SHEET
9 of 22

REV
P7


TE Connectivity


TE


PART NUMBER	ROWS		POWER		SIGNAL								POWER		
			P1	P2	1	2	3	4	5	6	7	8	P3	P4	
2-6600333-9	D		VM	VM	ES	EV	EV	EV	EV	EV	EV	EV			
	C				EV	EV	EV	EV	EV	EV	EV	EV			
	B				EV	EV	EV	EV	EV	EV	EV	EV			
	A				ES	EV	EV	EV	EV	EV	EV	ES			
2P+32S+2P		HD												HD	

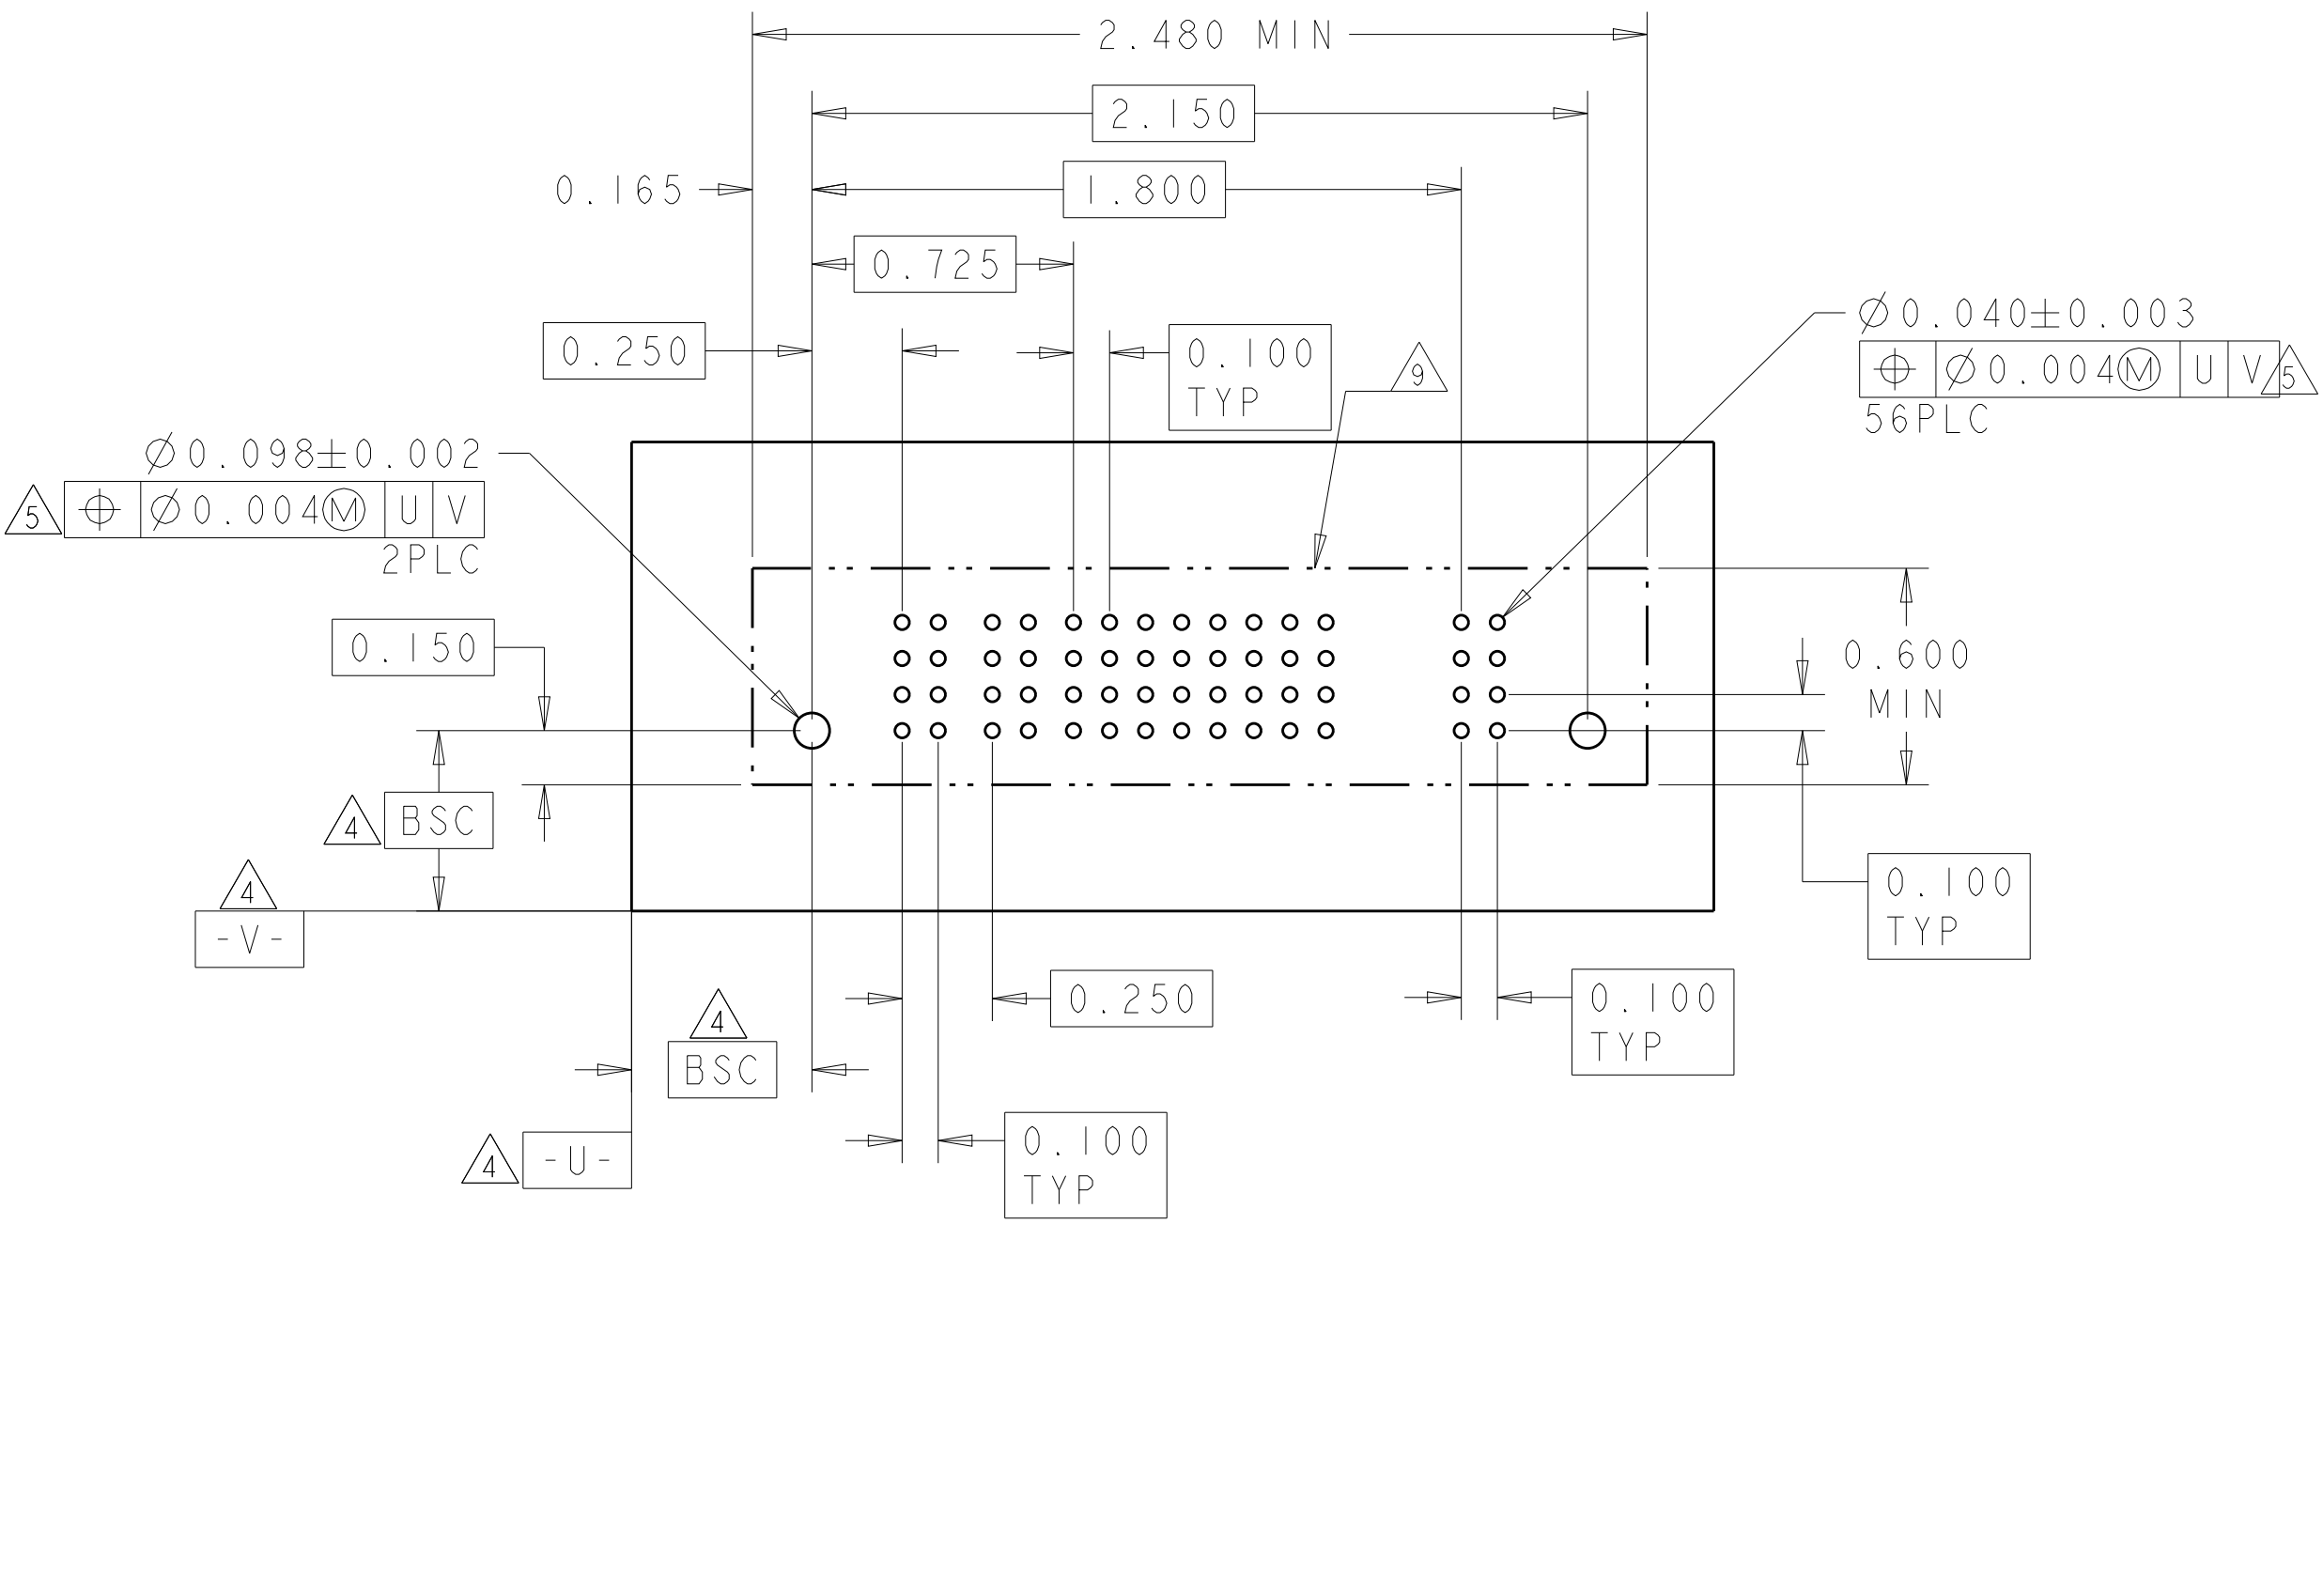4805 (3/11)

PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	
3-6600333-2	D		VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	
	C						EV	EV	EV	EV	EV	EV					
	B						EV	EV	EV	EV	EV	EV					
	A						EV	EV	EV	EV	EV	EV					
4P+24S+4P																	

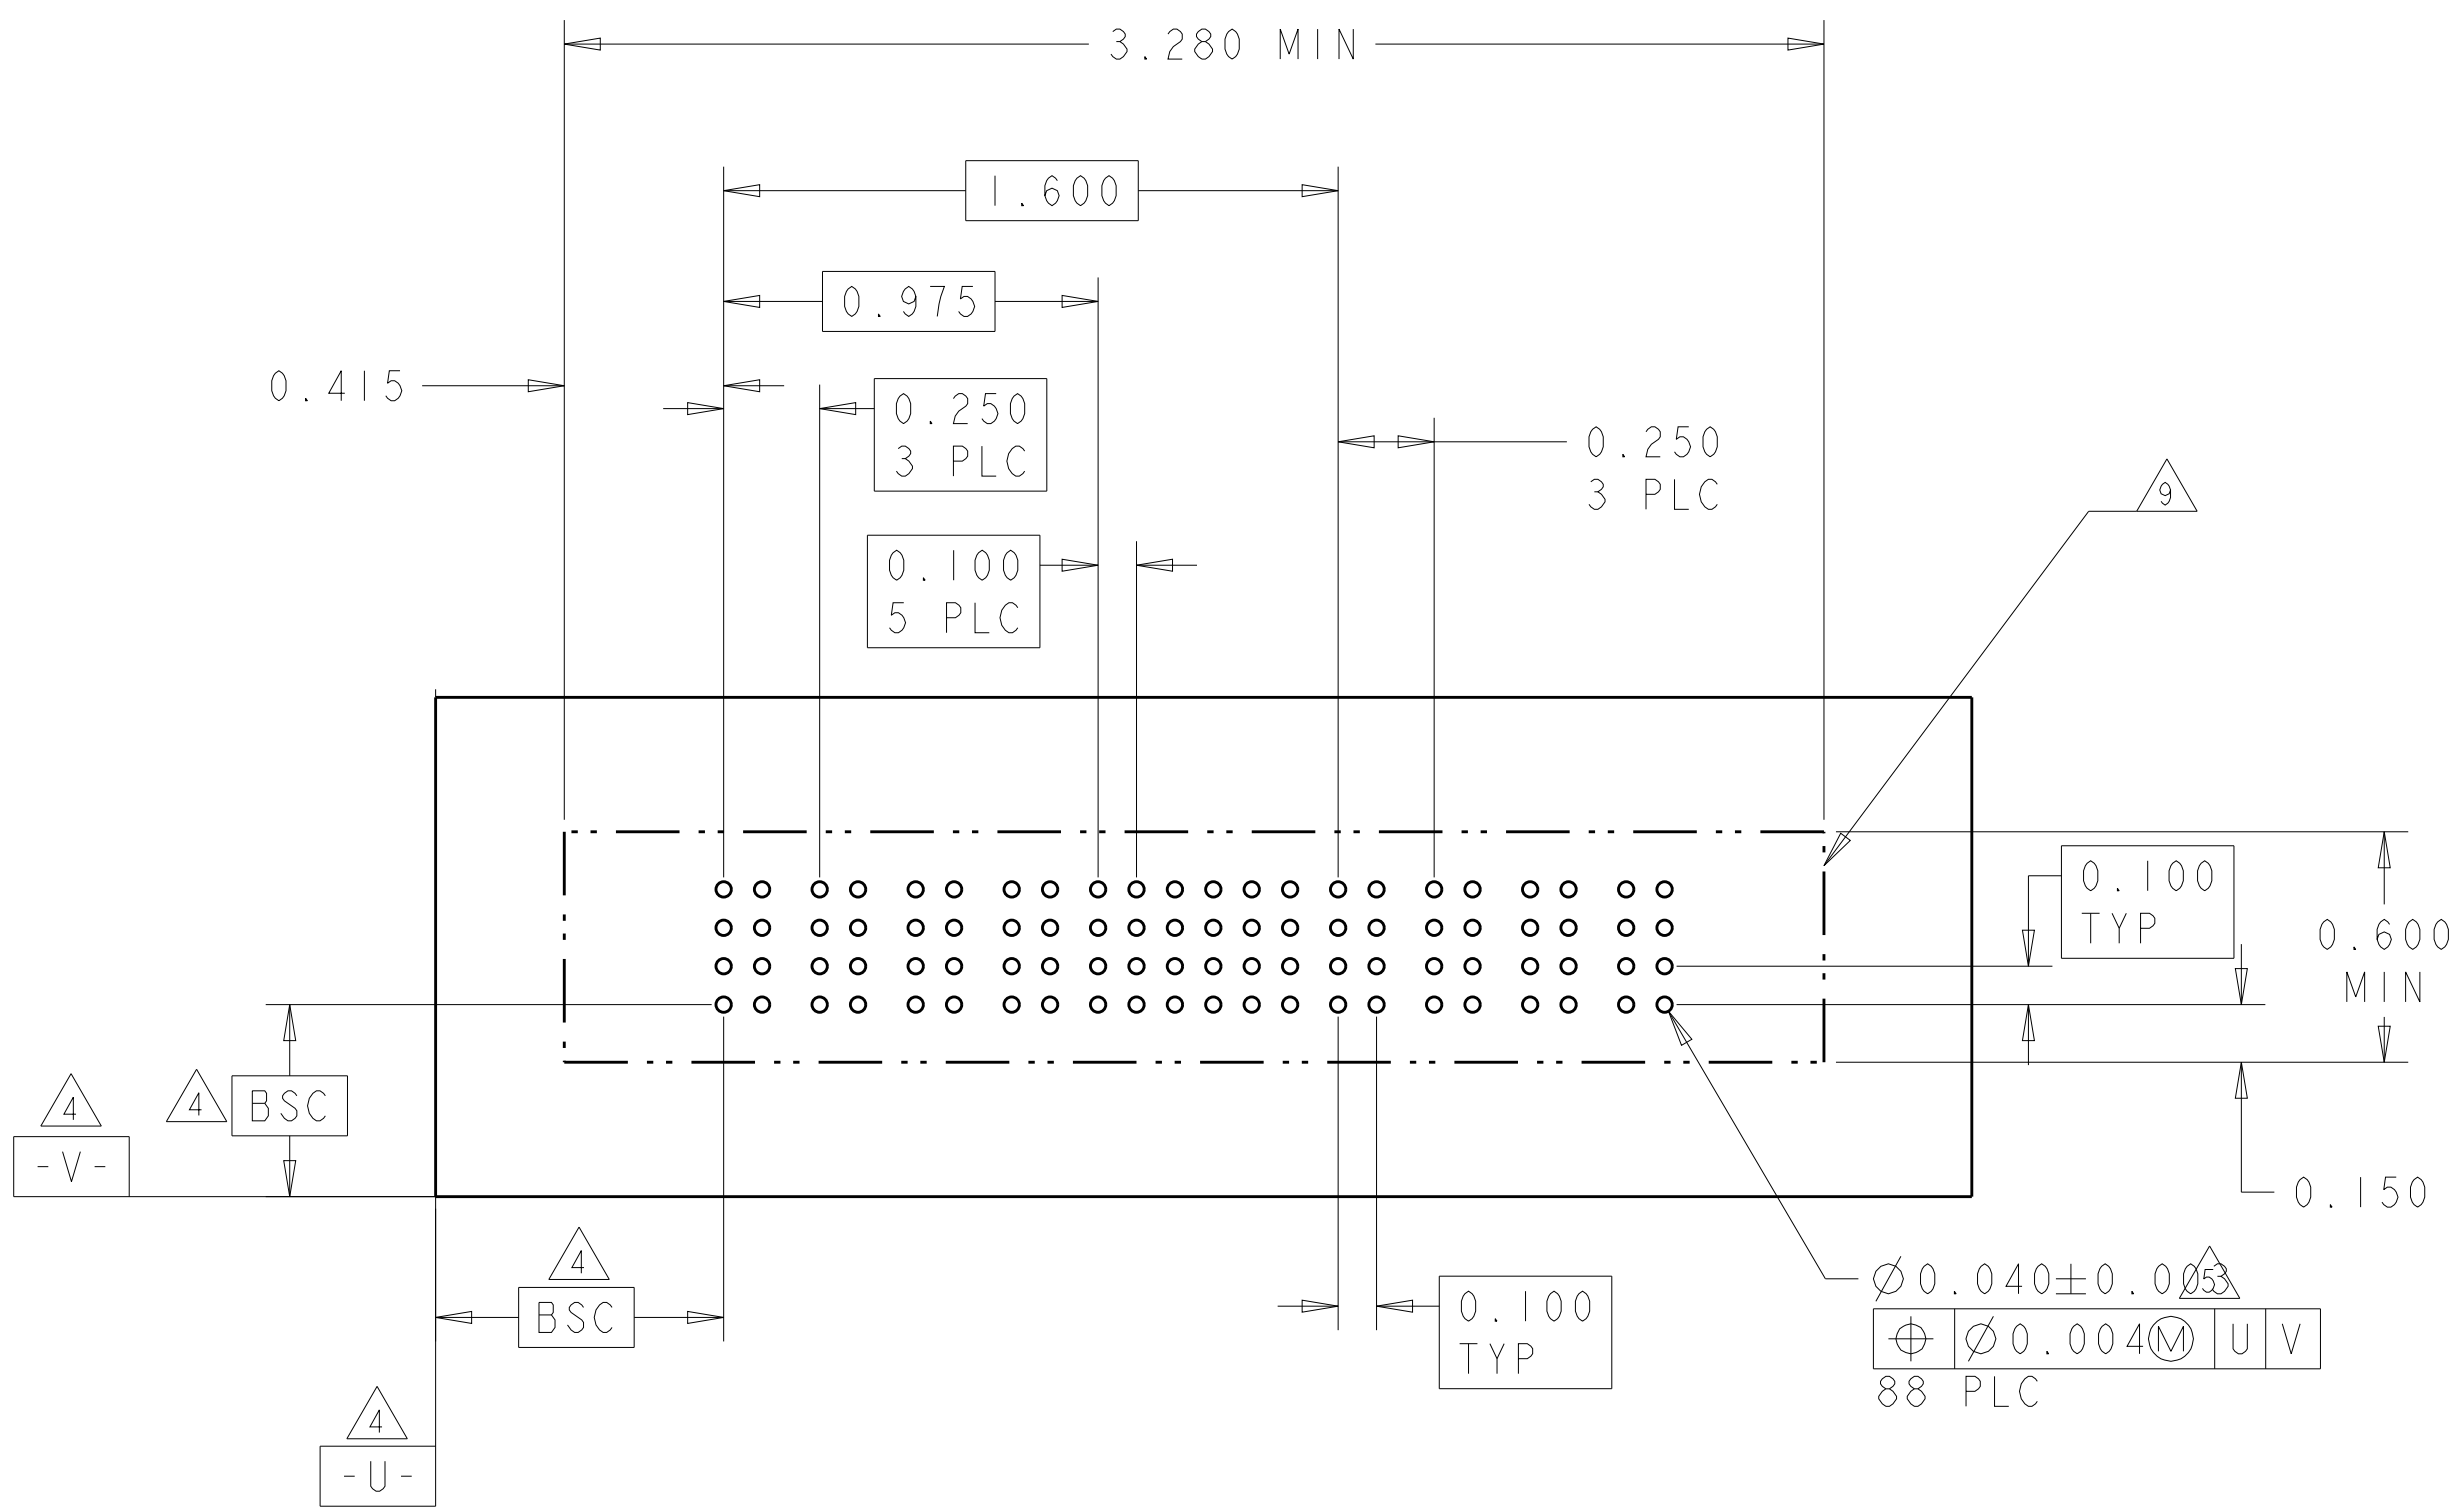4805 (3/11)



PART NUMBER	ROWS		POWER				SIGNAL				POWER				
			P1	P2	P3	P4	1	2	3	4	P5	P6	P7	P8	
3-6600333-3	D C B A														
4P + 16S + 4P															

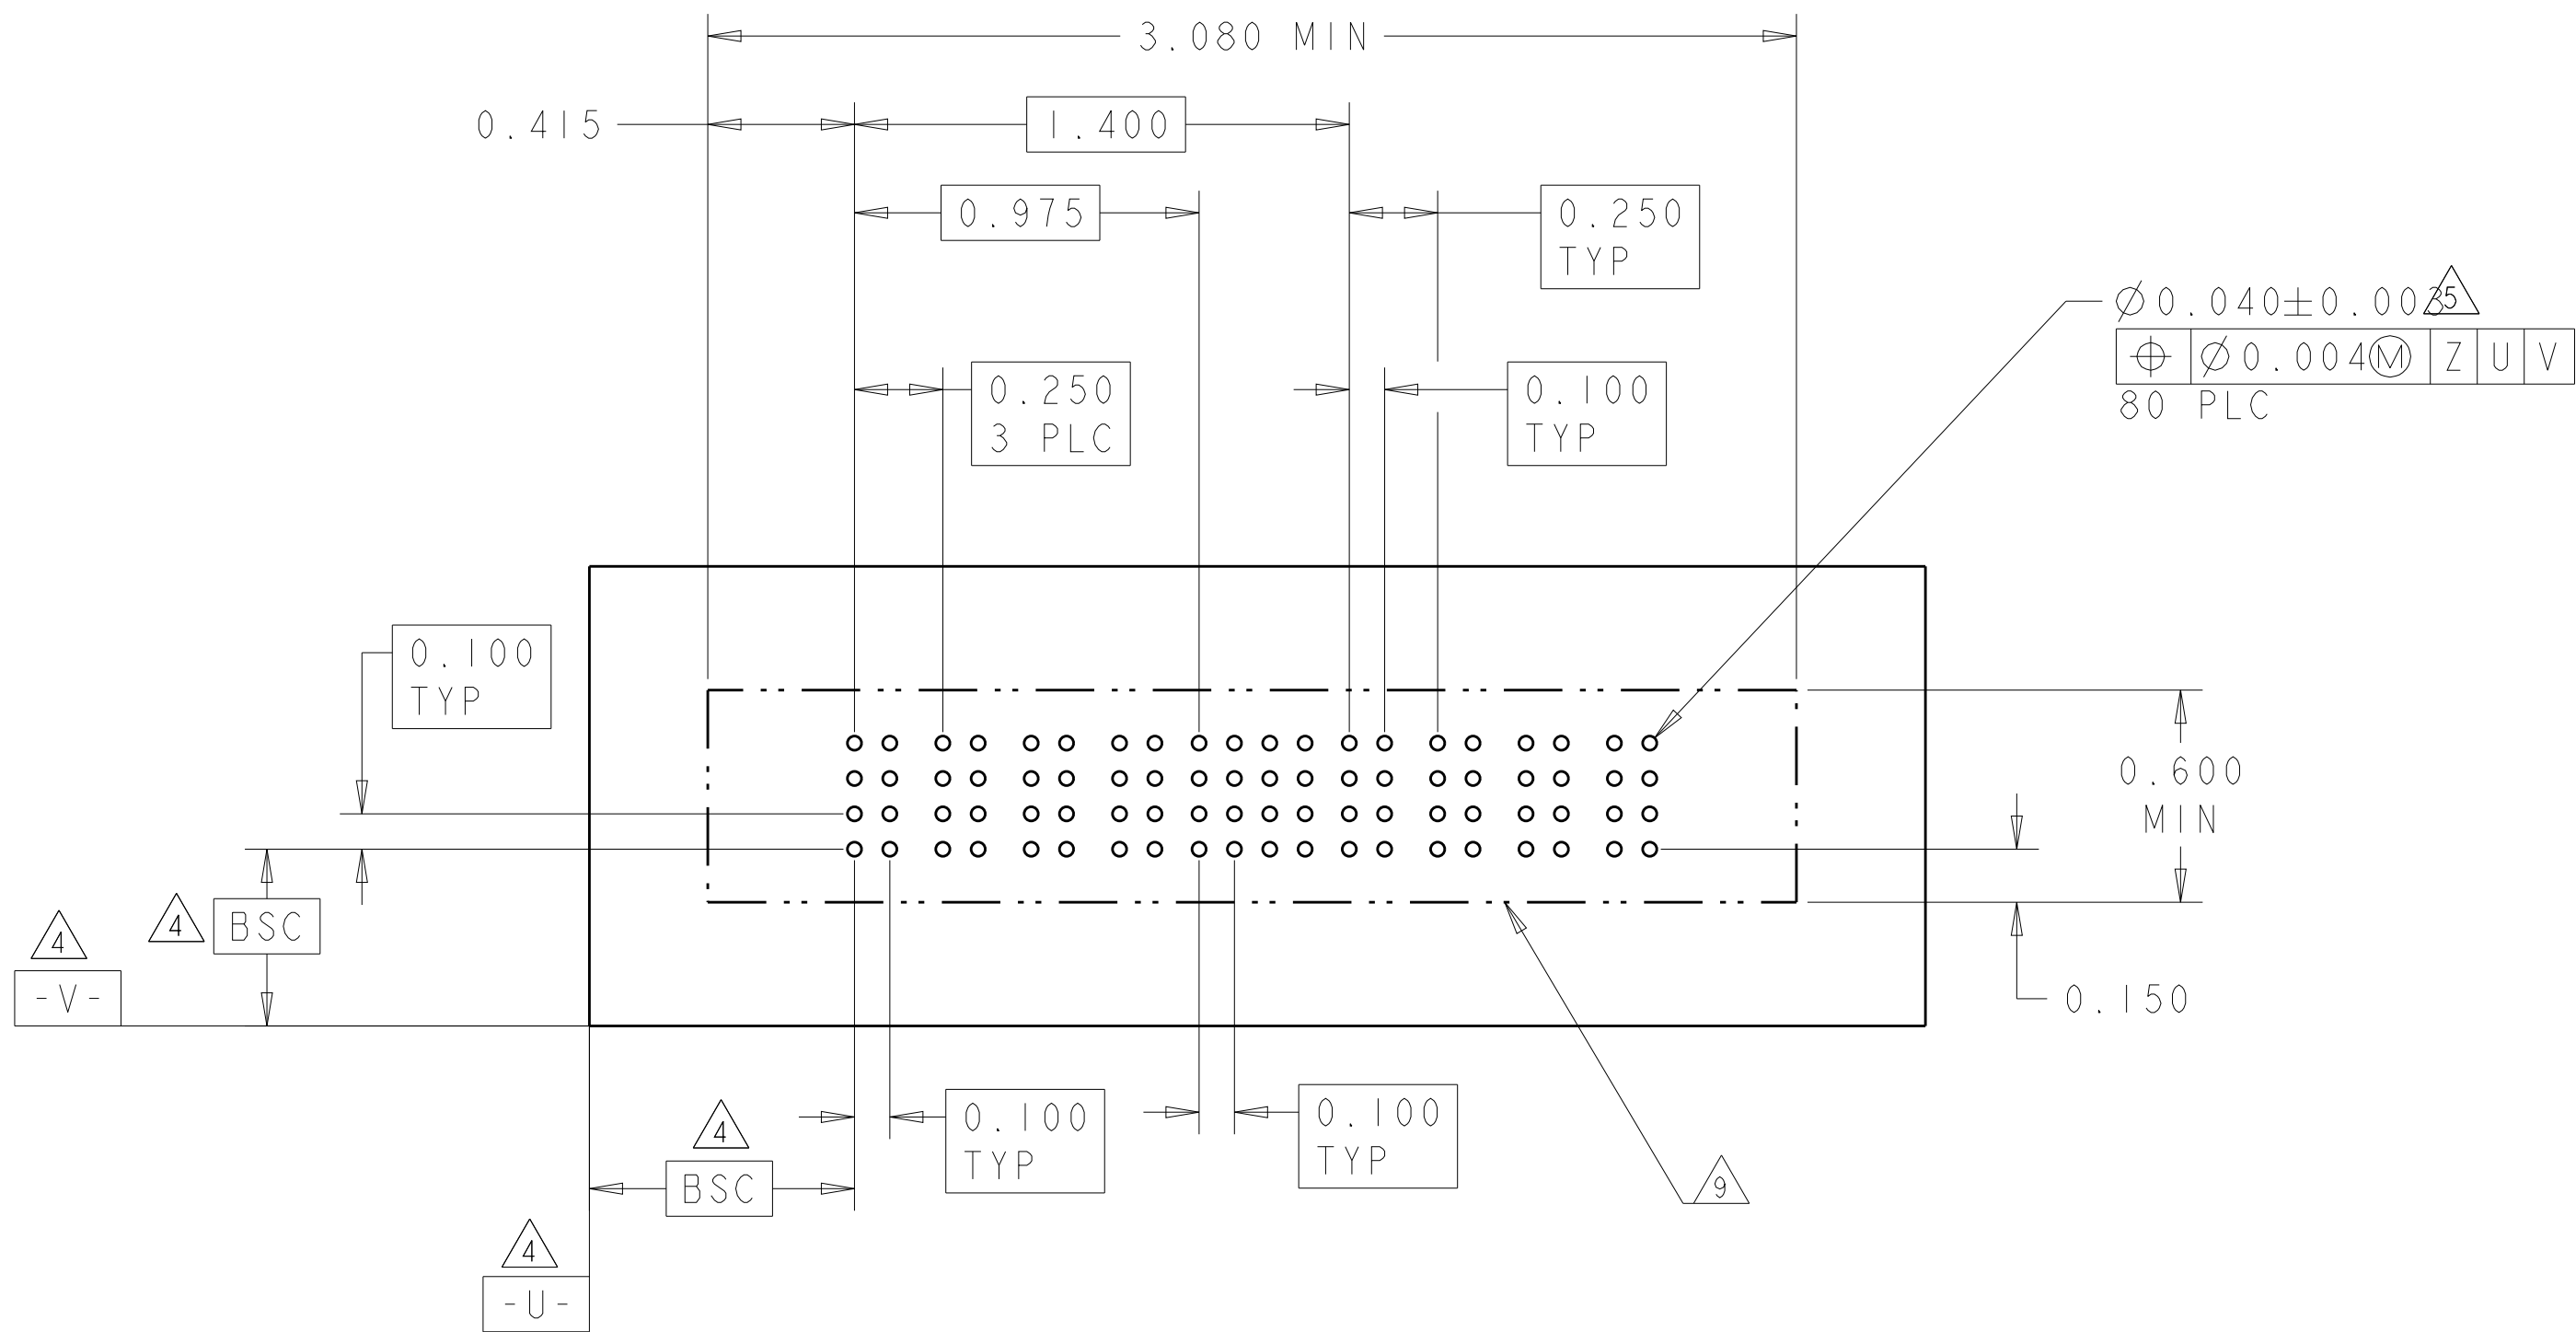4805 (3/11)

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
3-6600333-5	D		VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					EV	EV	EV	EV	EV	EV				
3P+24S+3P		HD													HD

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
3-6600333-7	D		VM	VM	ES	EV	EV	EV	EV	EV	VM	VM	
	C				ES	EV	EV	EV	EV	EV			
	B				EV	EV	EV	EV	EV	EV			
	A				ES	EV	EV	EV	EV	EV			
2P+24S+2P		HD											HD

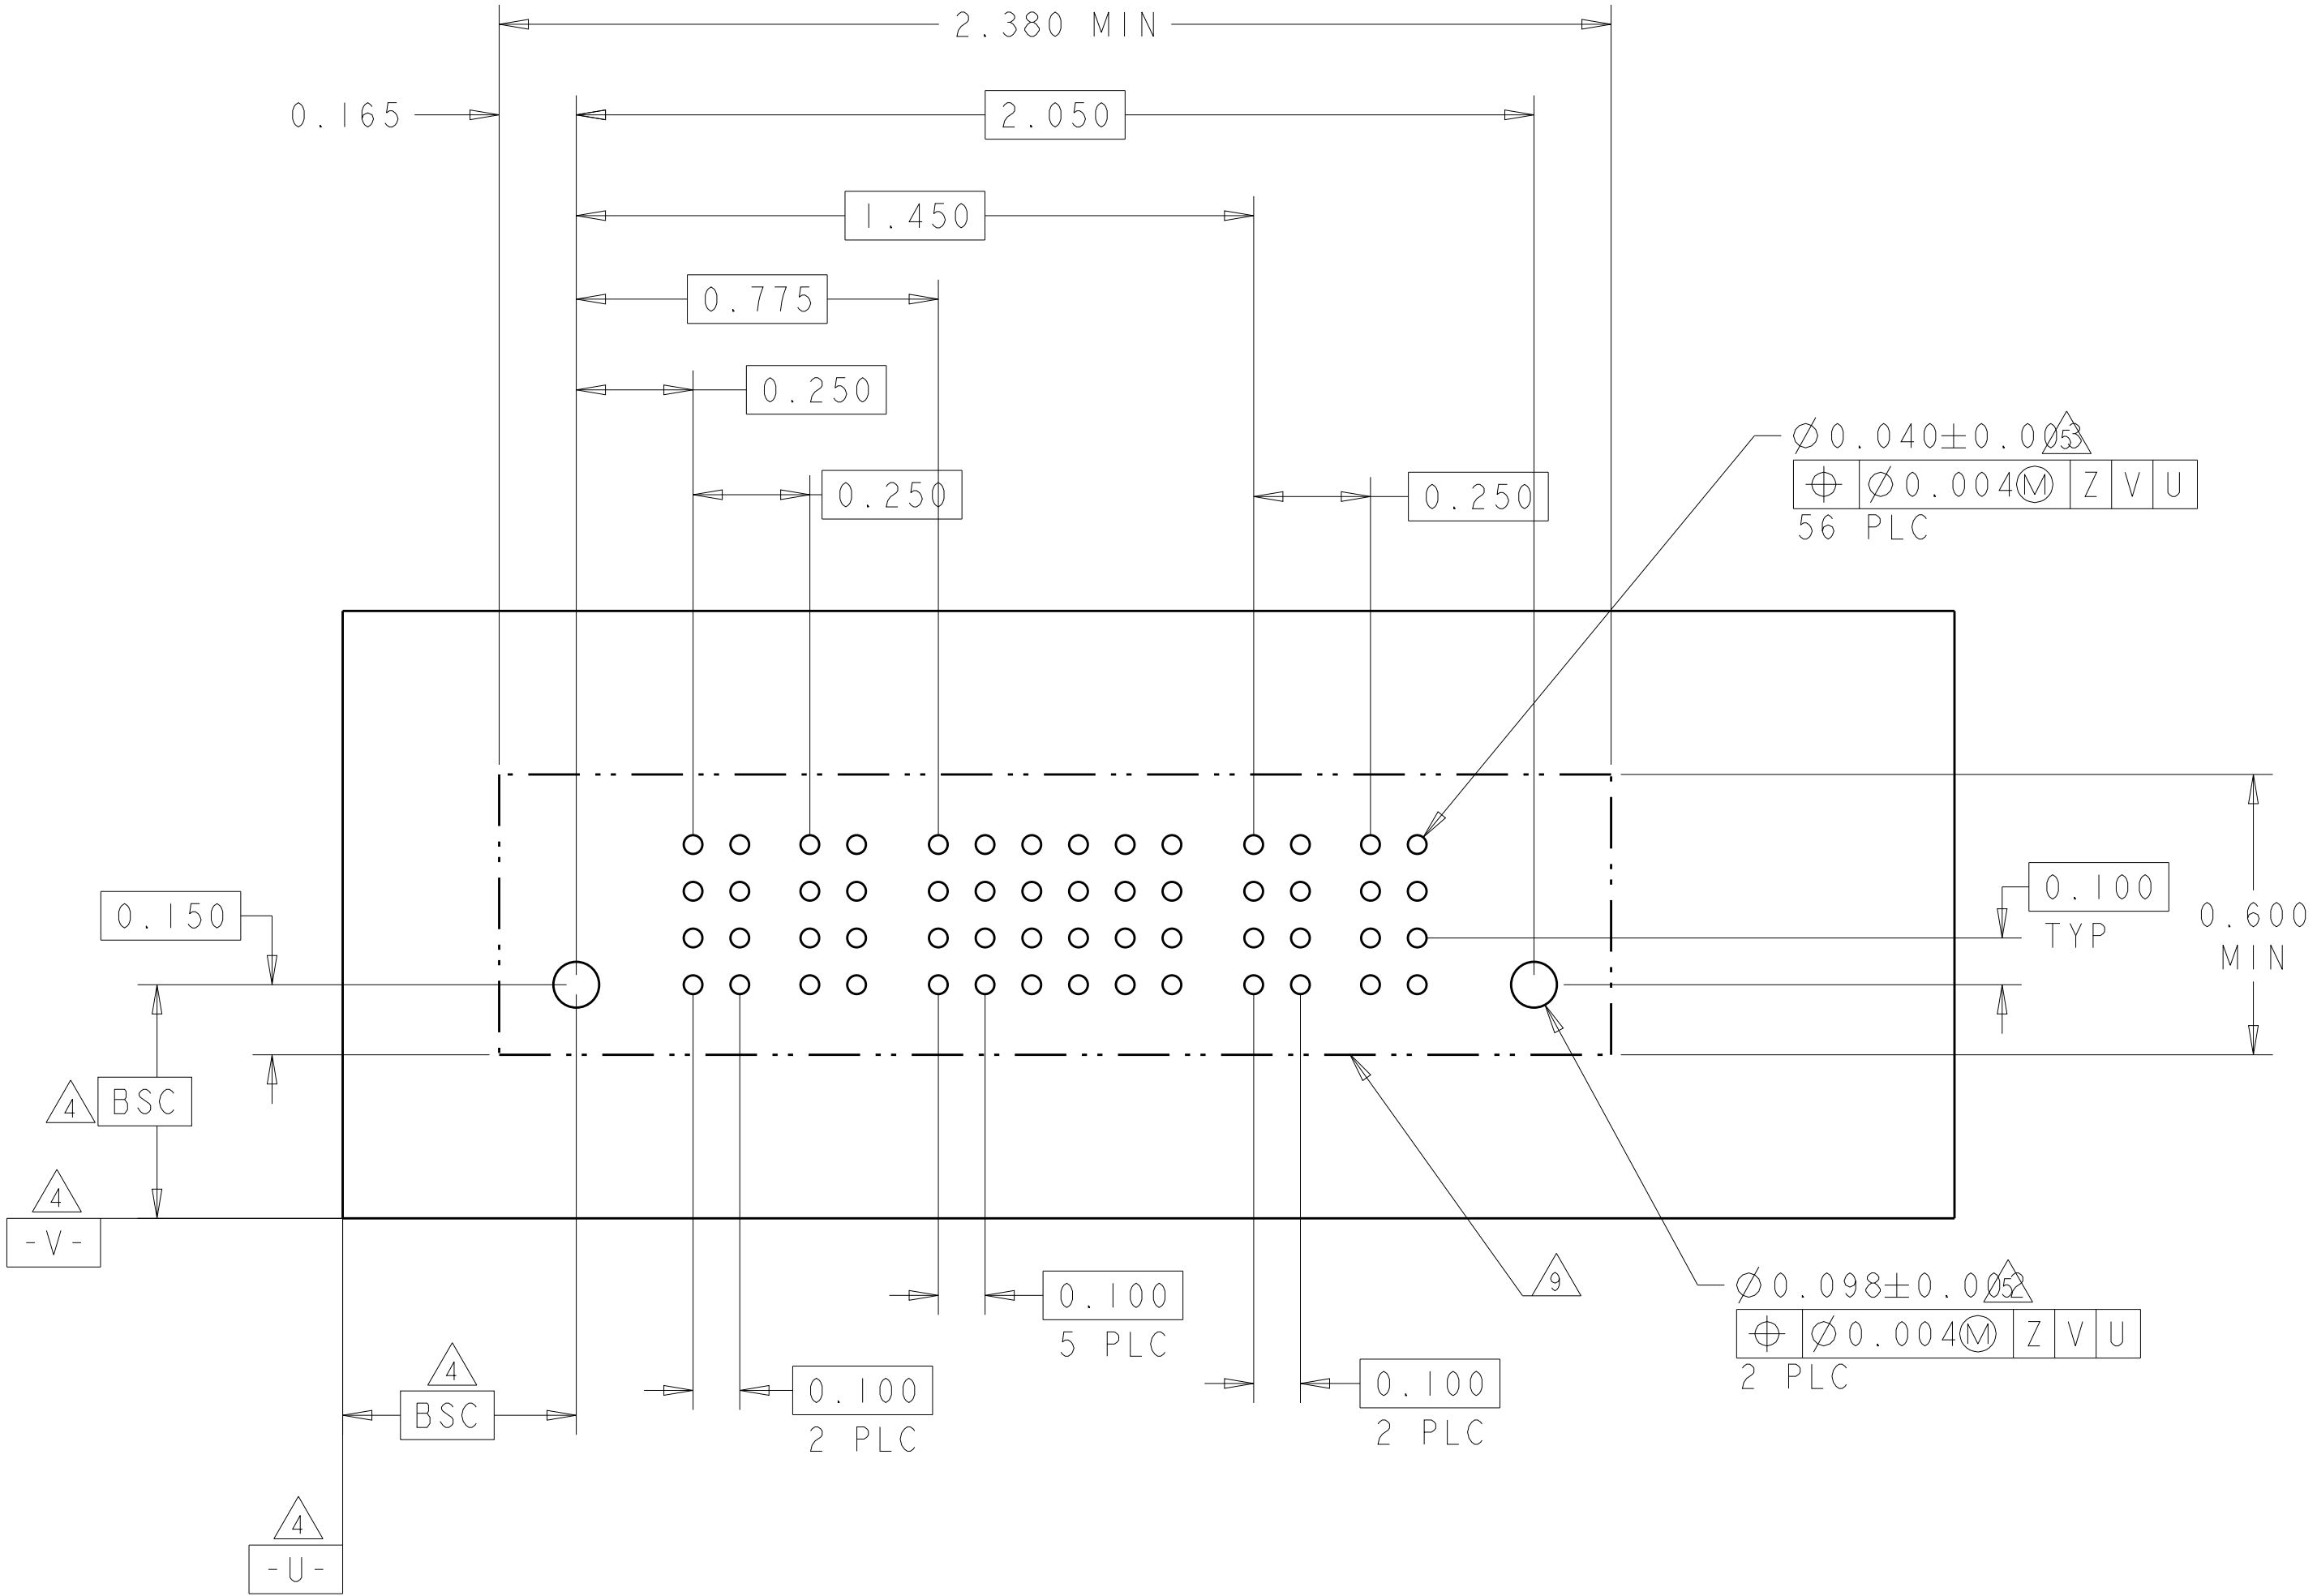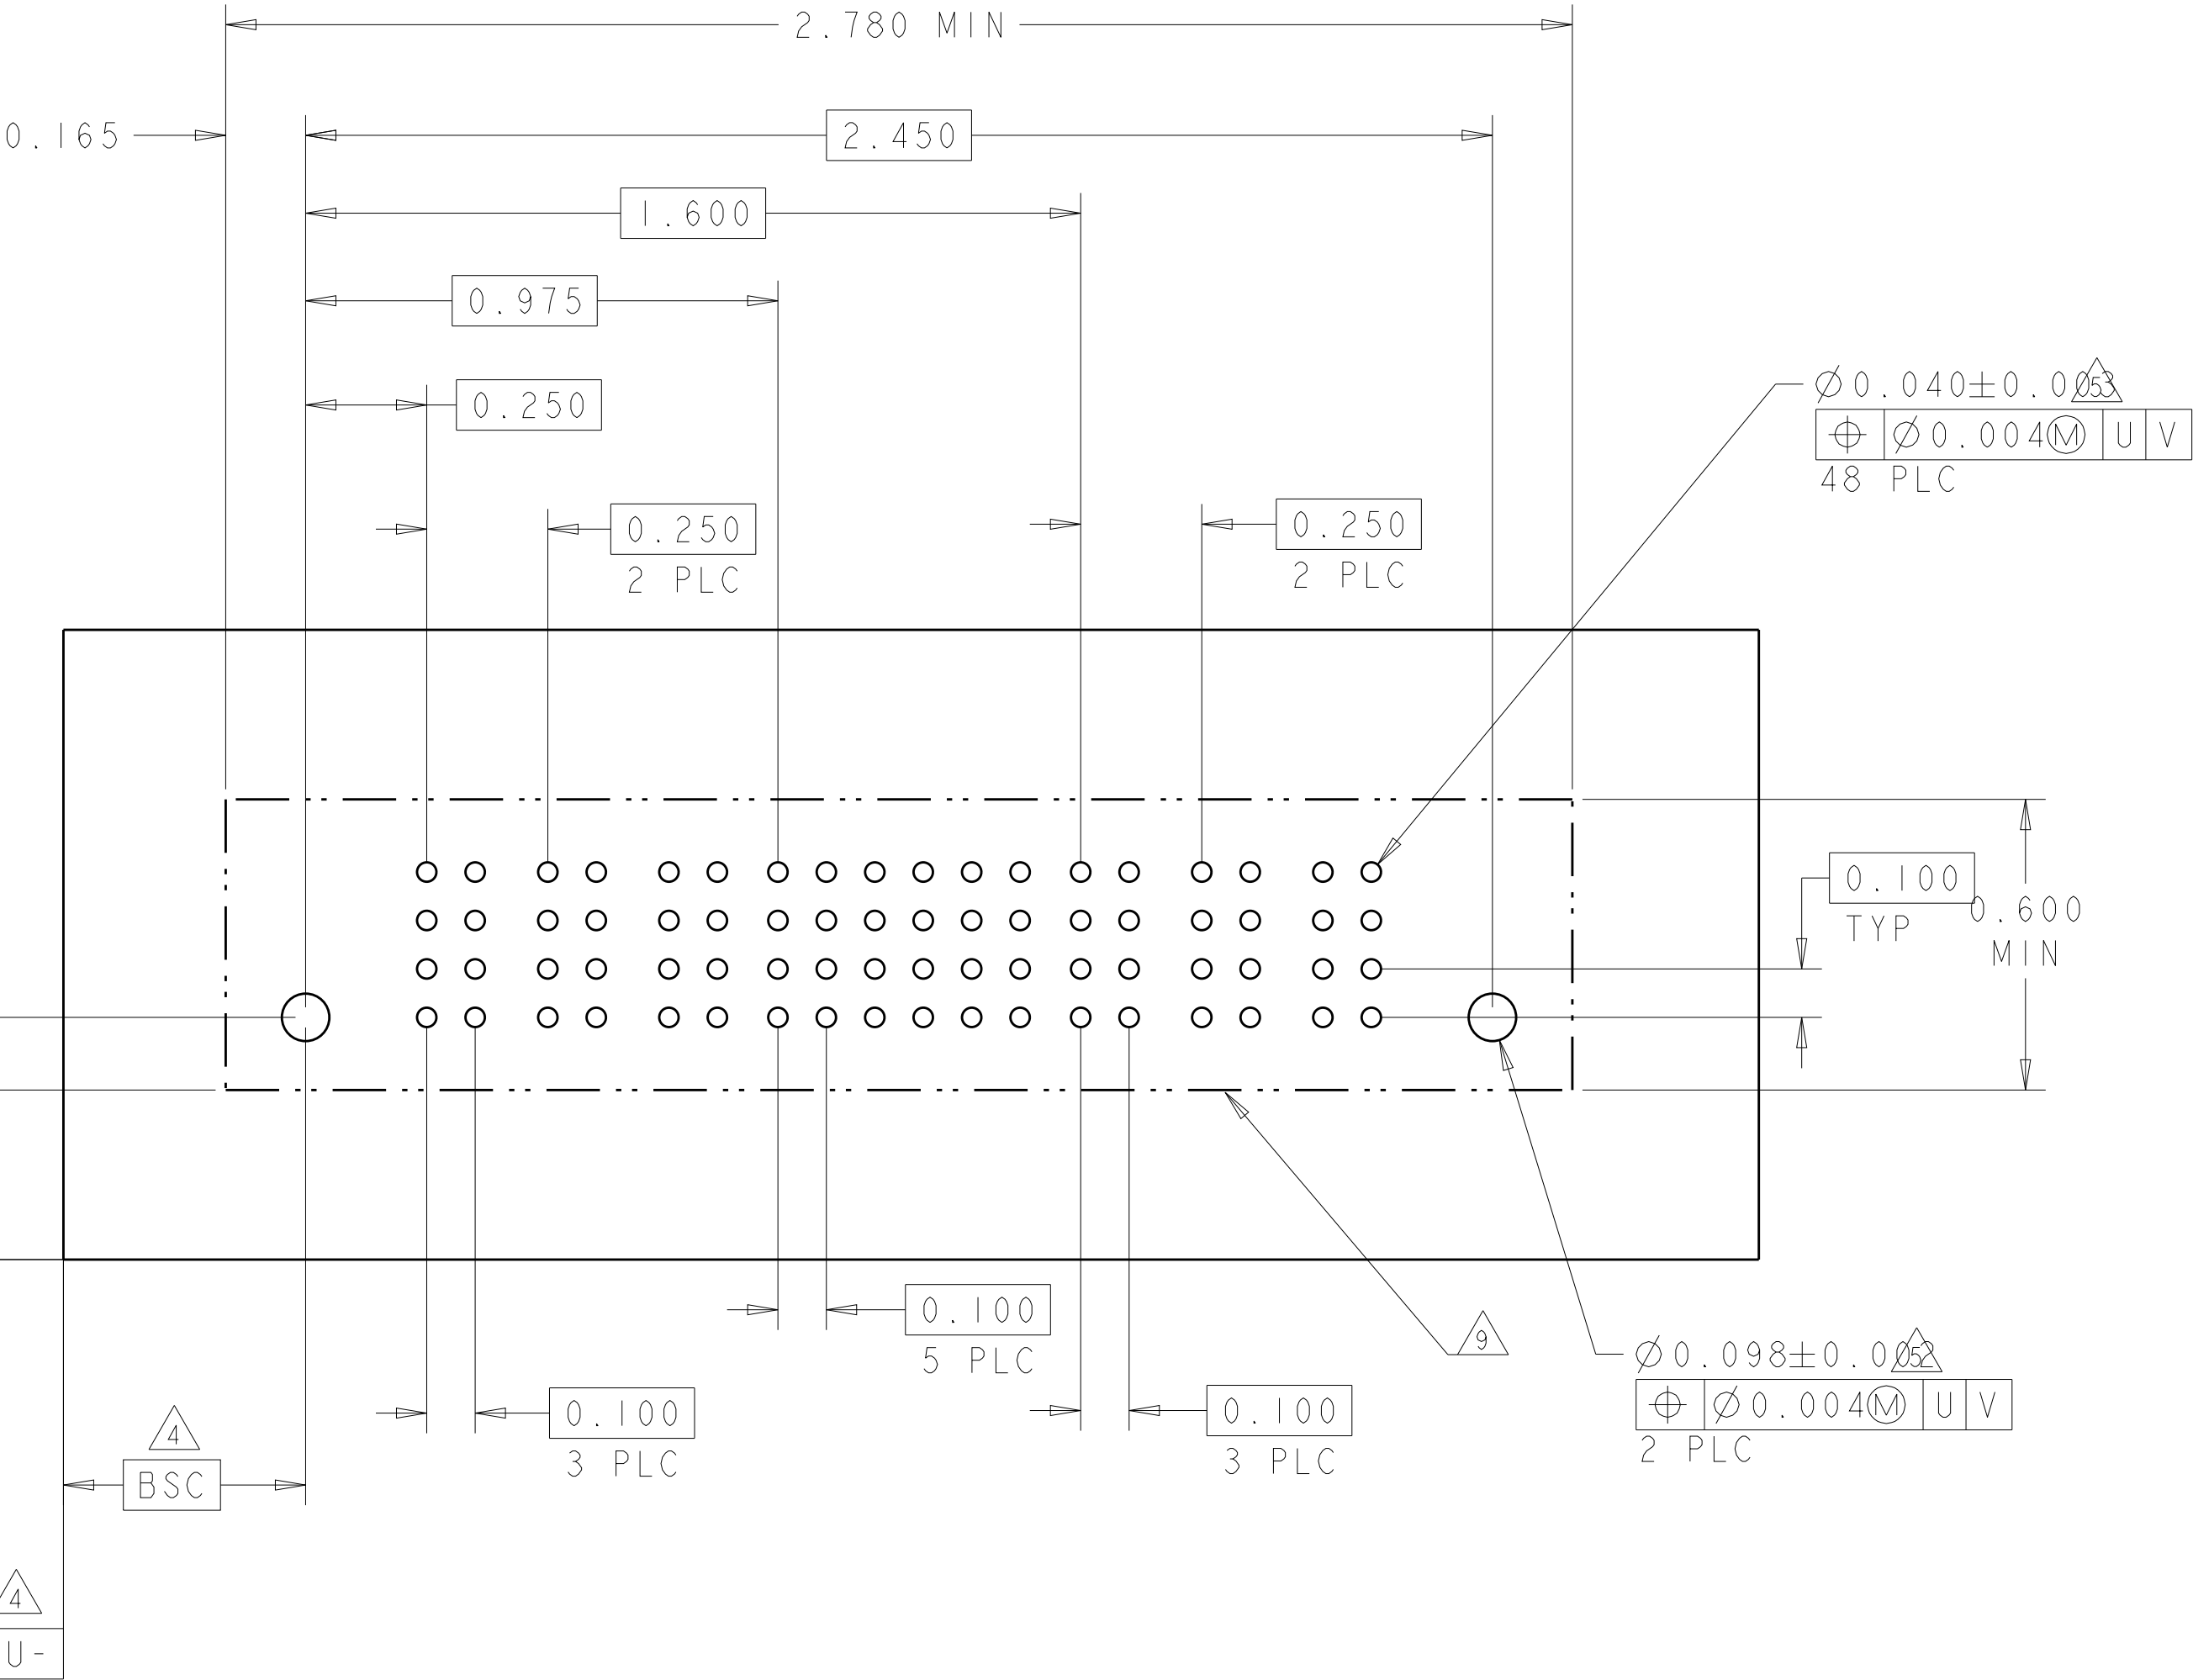

[illegible]4805 (3/11)



PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
3-6600333-9	D		VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					ES	EV	EV	EV	EV	EV				
3ACP+24S+3ACP		HD													HD

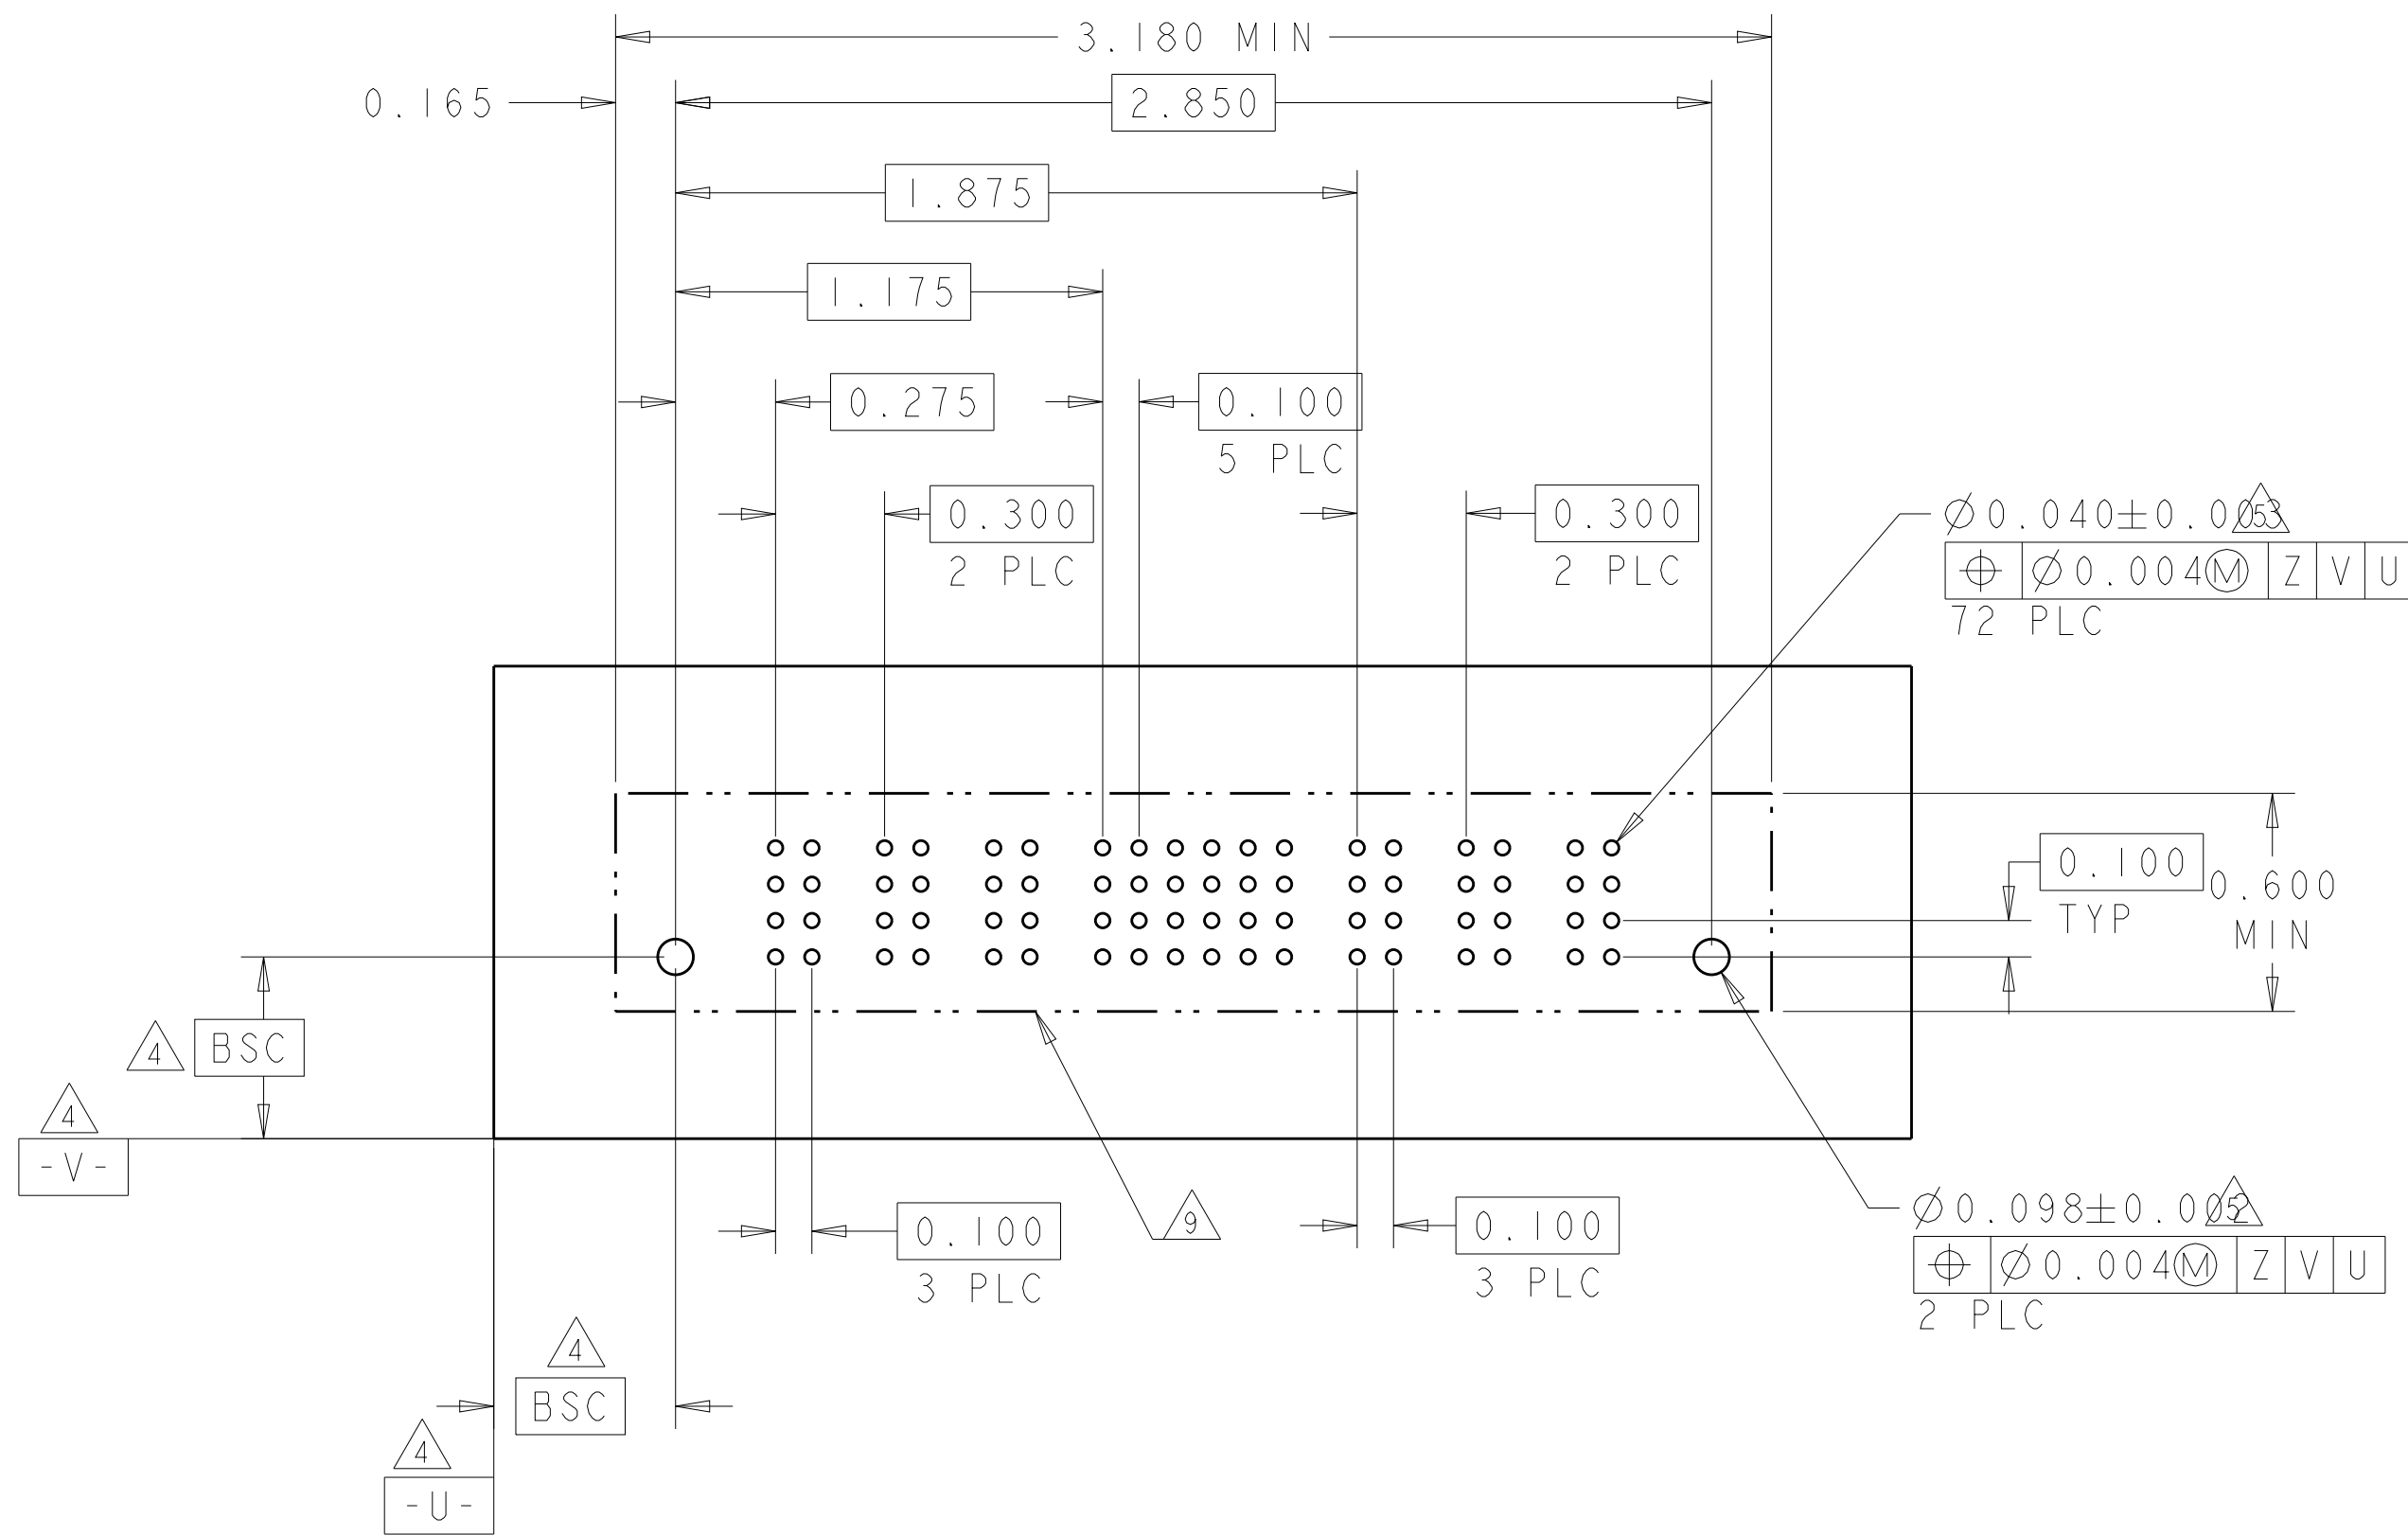4805 (3/11)


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-


PART NUMBER	ROWS		POWER		SIGNAL			POWER		
			P1	P2	1	2	3	P3	P4	
4-6600330-1	D		VM	VM	EV	EV	EV	VM	VM	
	C				EV	EV	EV			
	B				EV	EV	EV			
	A				EV	EV	EV			
					EV	EV	EV			
2P + 12S + 2P										

PART NUMBER	ROWS		POWER		SIGNAL			POWER		
			P1	P2	1	2	3	P2		
4-6600333-9	D		VM		ES	EV	EV	VM		
	C				EV	EV	EV			
	B				EV	EV	EV			
	A				EV	EV	EV			
1P+12S+1P										

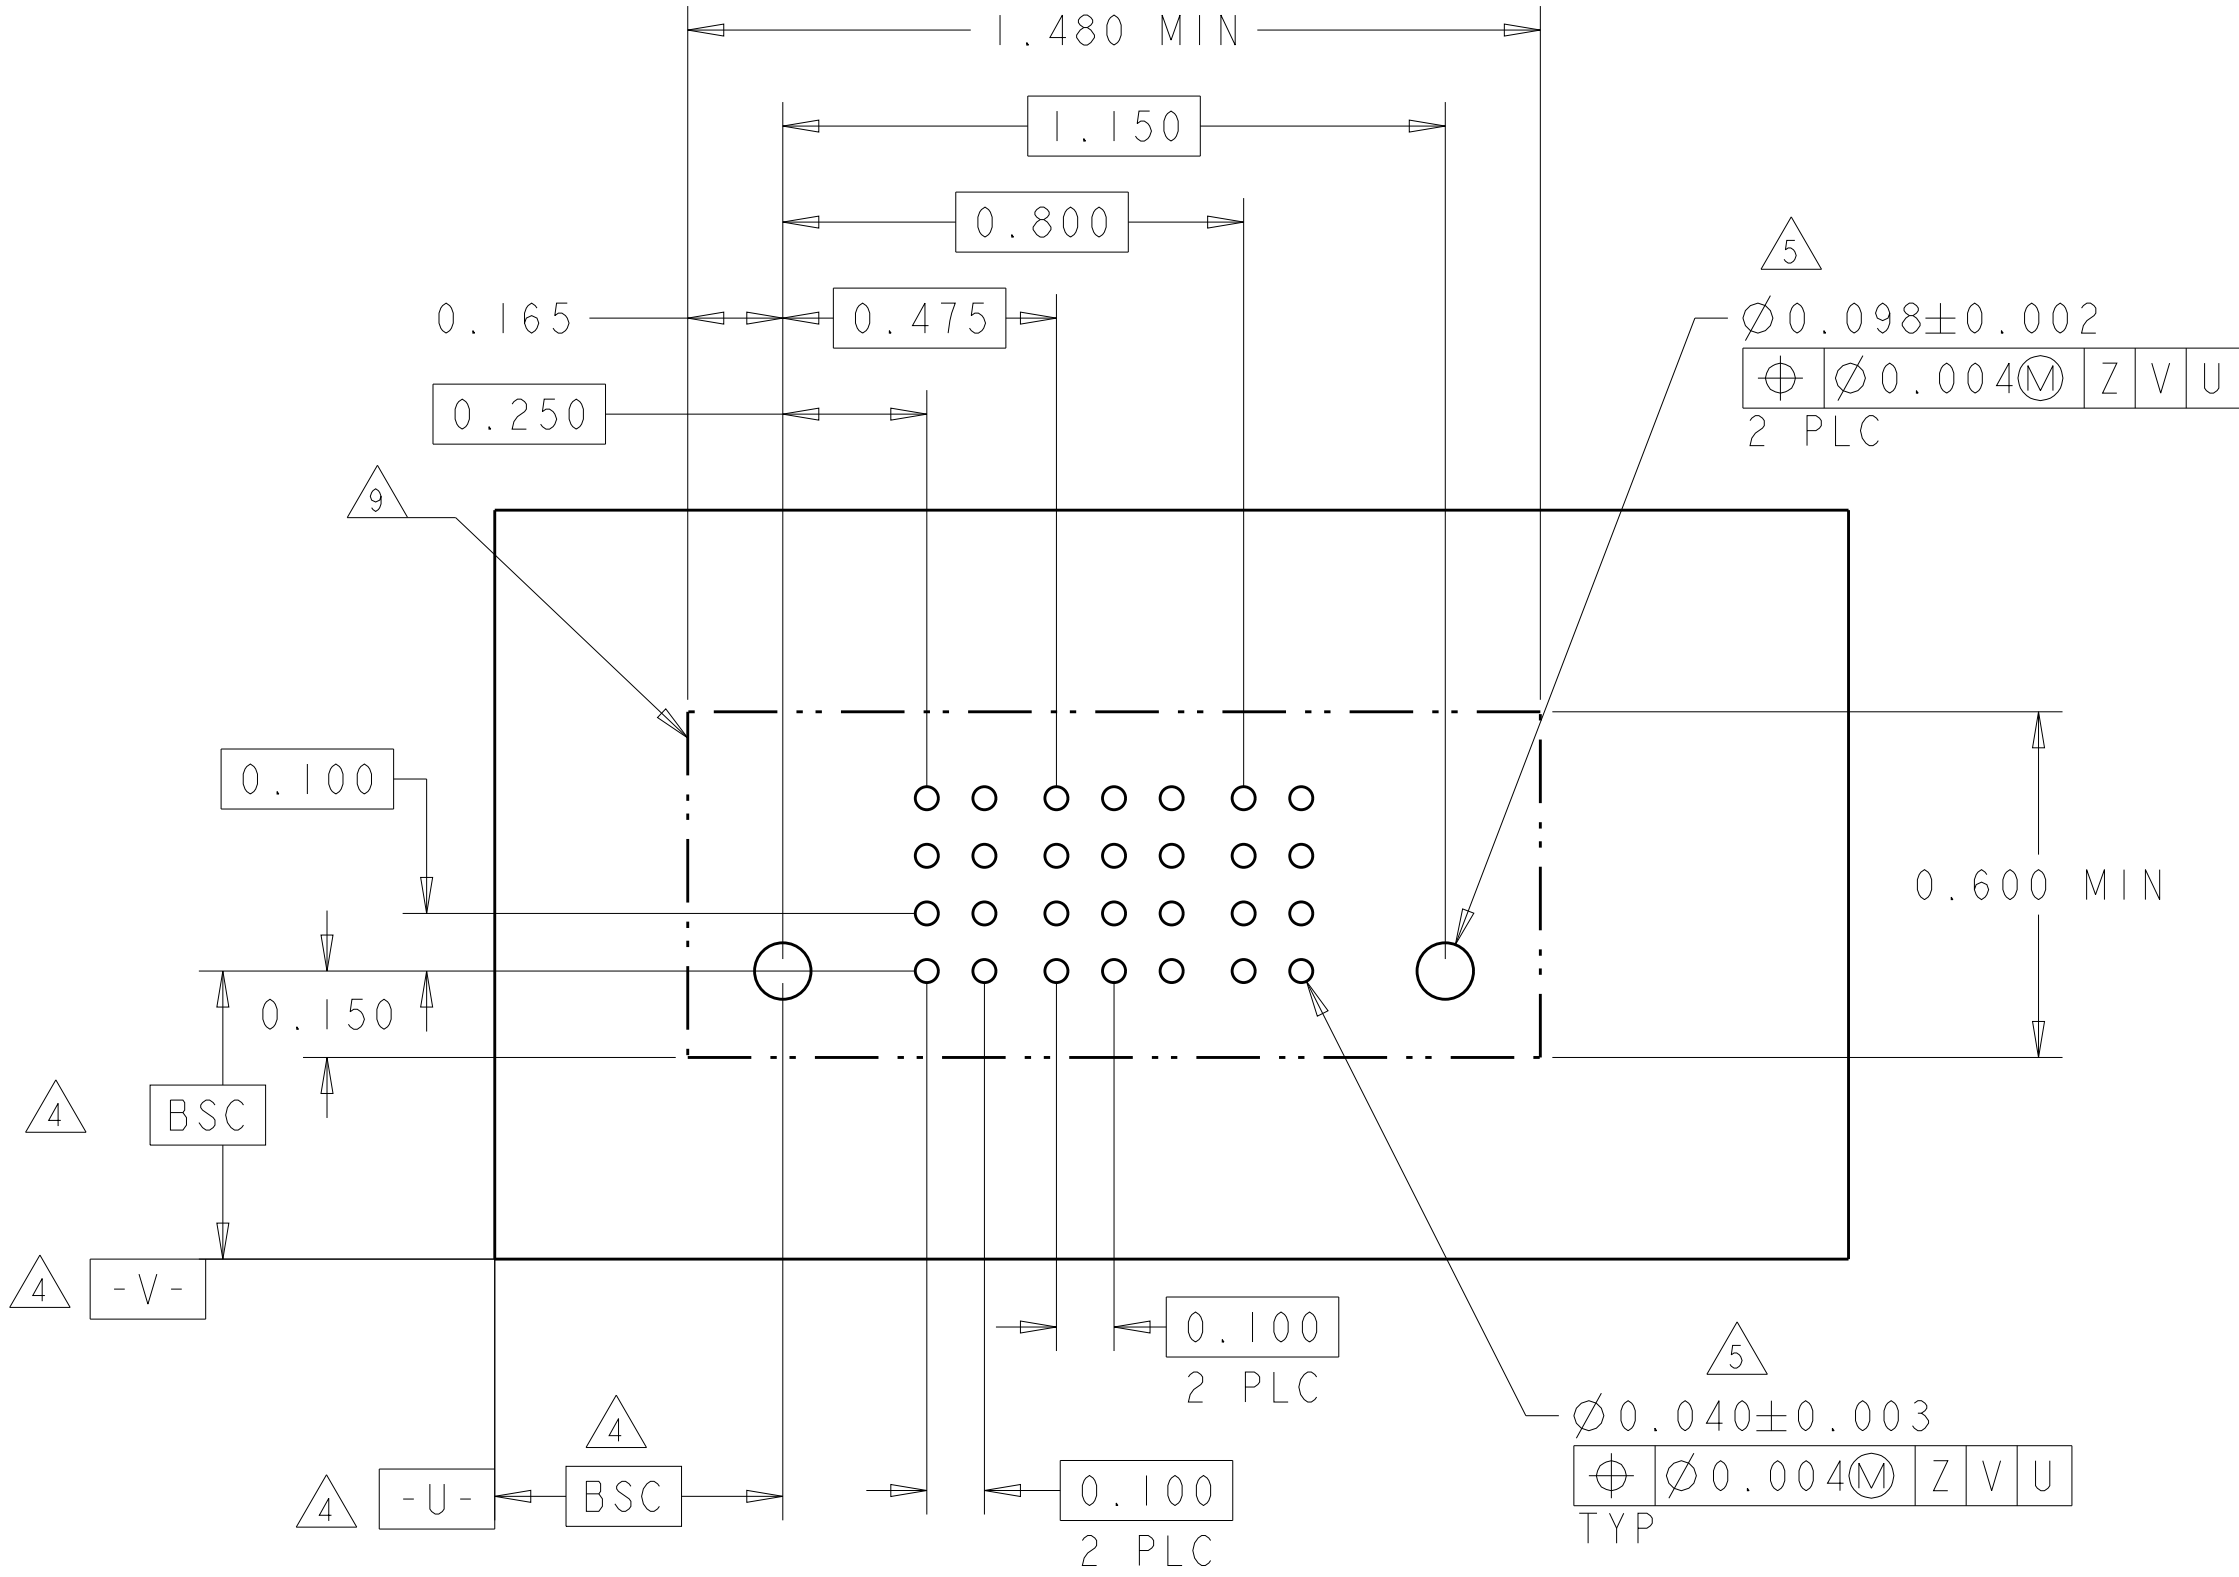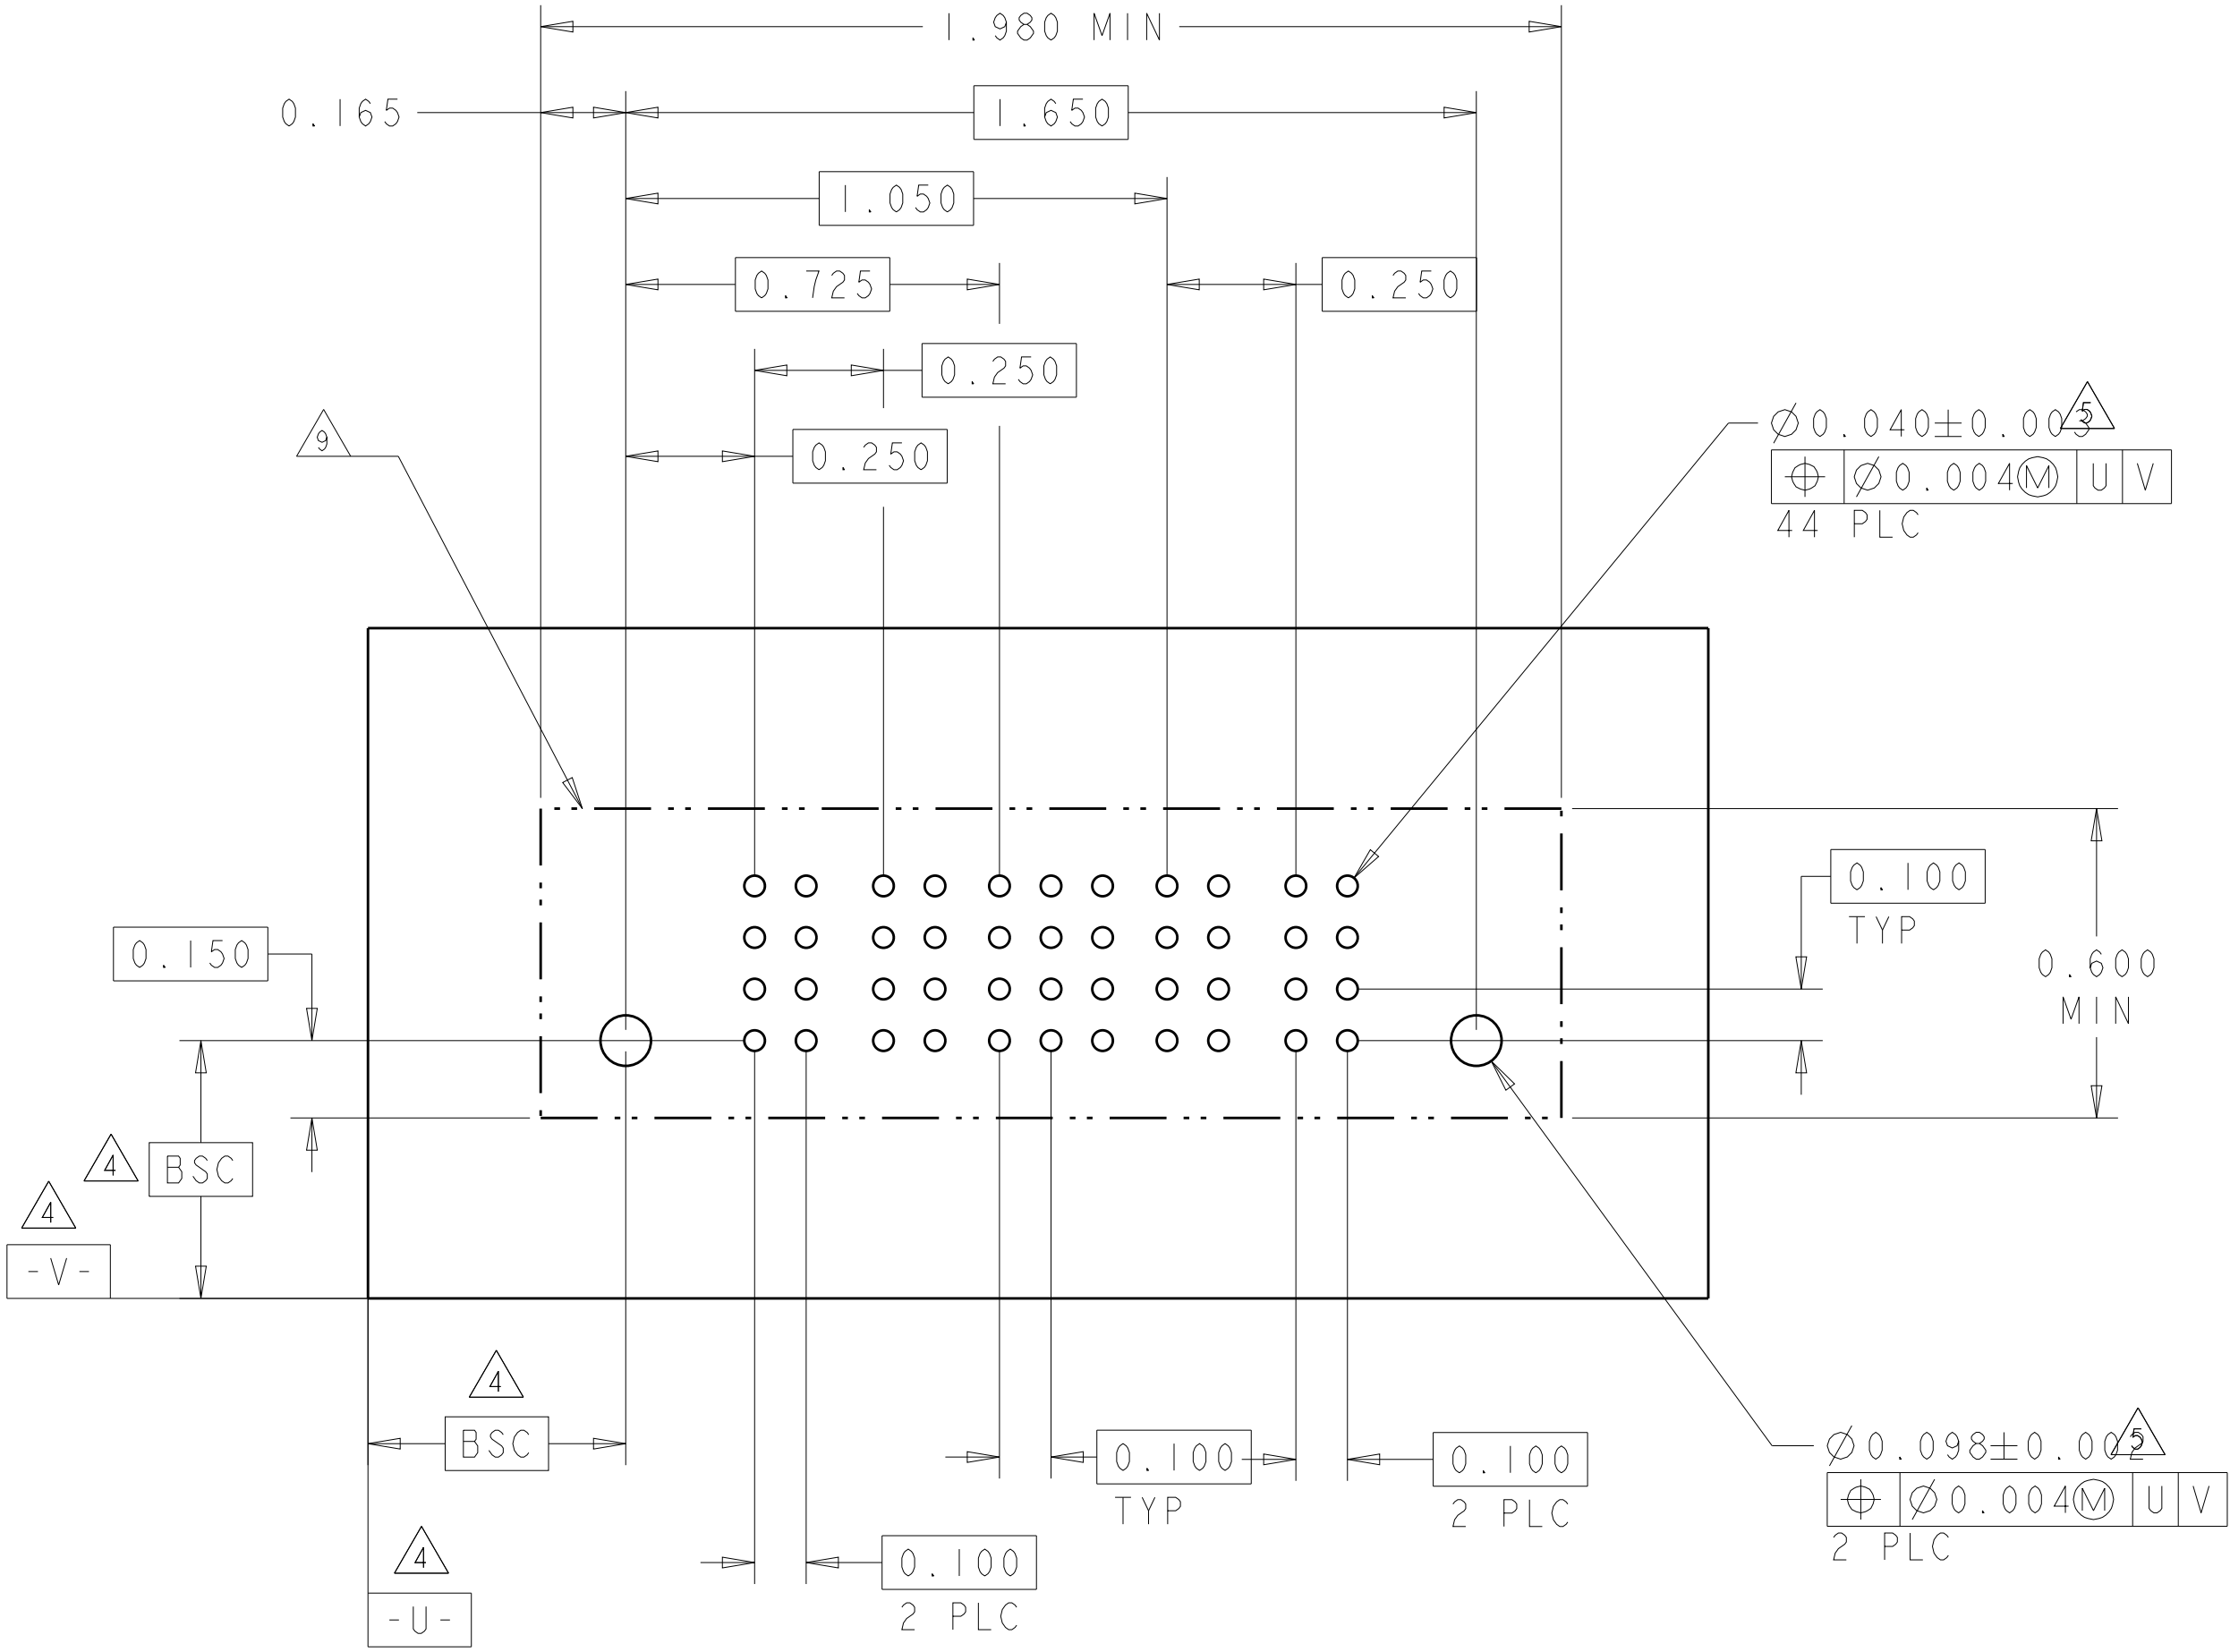

N





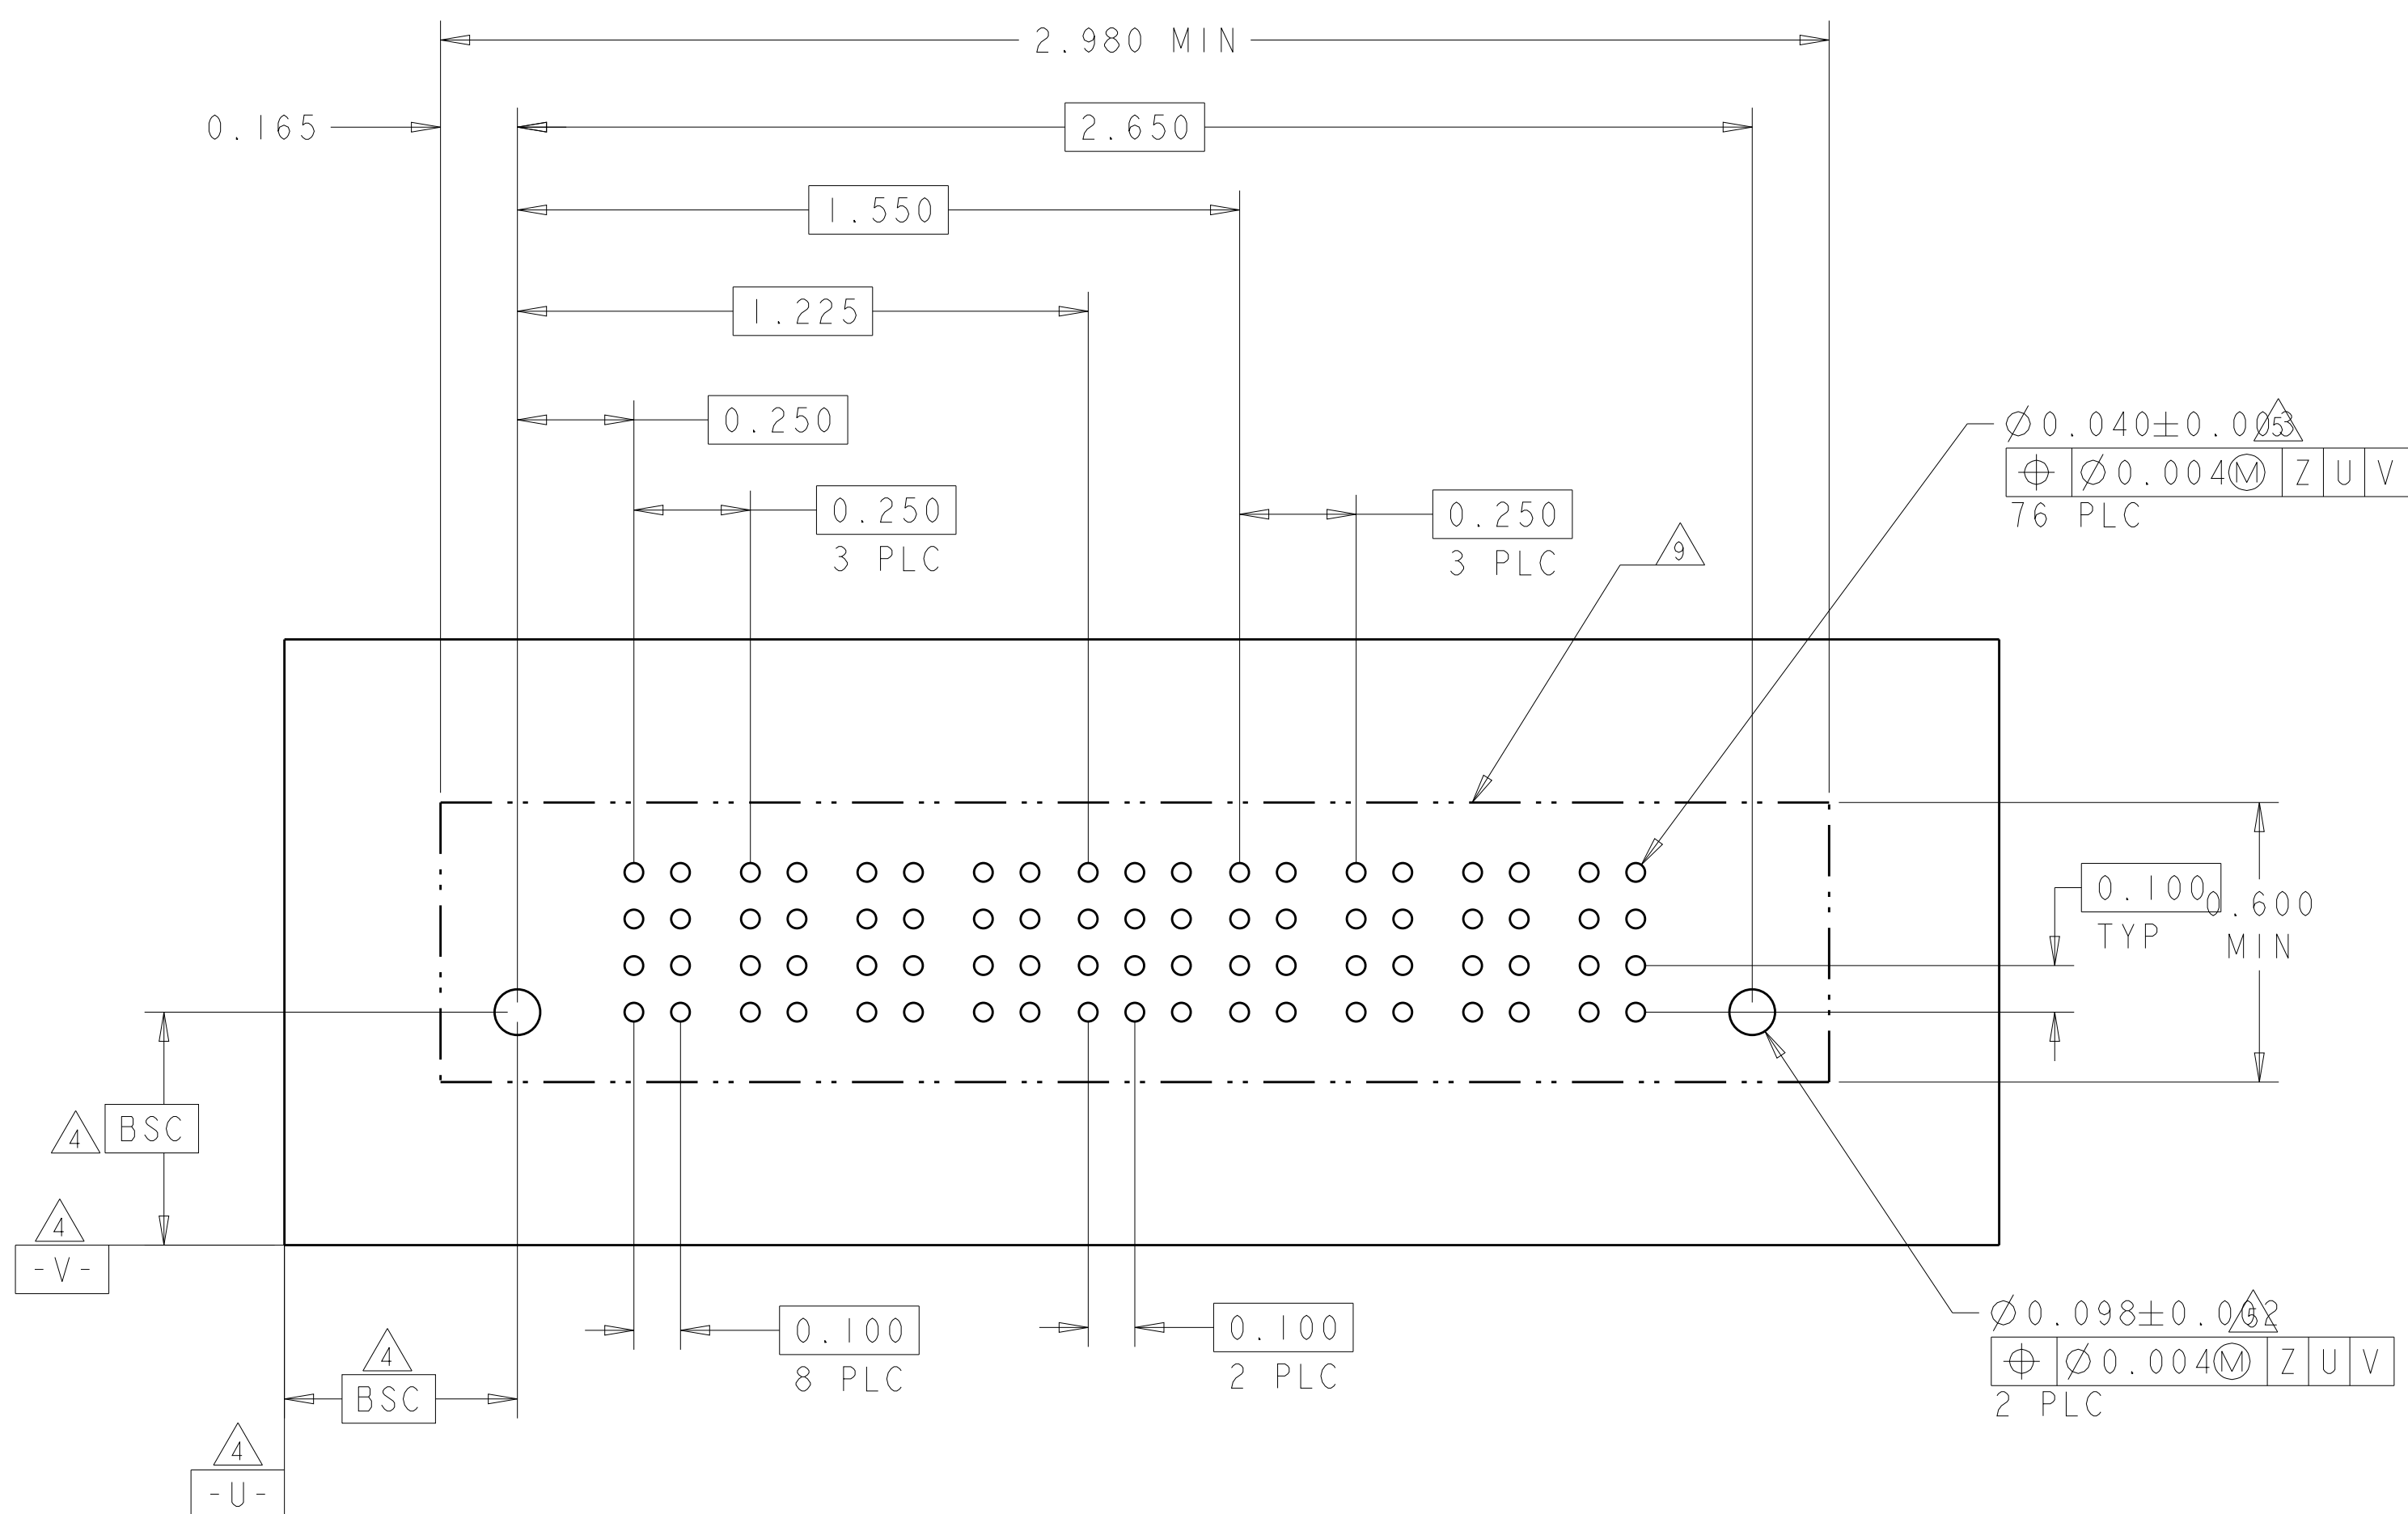[illegible]4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL						POWER			
			P1	P2	1	2	3	4	5	6	P3	P4		
4-6600333-3	D		VM	VM	ES	EV	EV	EV	EV	EV	VM	VM		
	C				EV	EV	EV	EV	EV	EV				
	B				EV	EV	EV	EV	EV	EV				
	A				EV	EV	EV	EV	EV	EV				
2ACP+24S+2ACP			HD											HD

PART NUMBER	ROWS		POWER		SIGNAL						POWER			
			P1	P2	1	2	3	4	5	6	P3	P4		
4-6600333-5	D		VM	VM	EV	EV	EV	EV	EV	EV	VM	VM		
	C				EV	EV	EV	EV	EV	EV				
	B				EV	EV	ES	EV	EV	EV				
	A				ES	EV	EV	EV	EV	EV				
2ACP+24S+2ACP			HD											HD

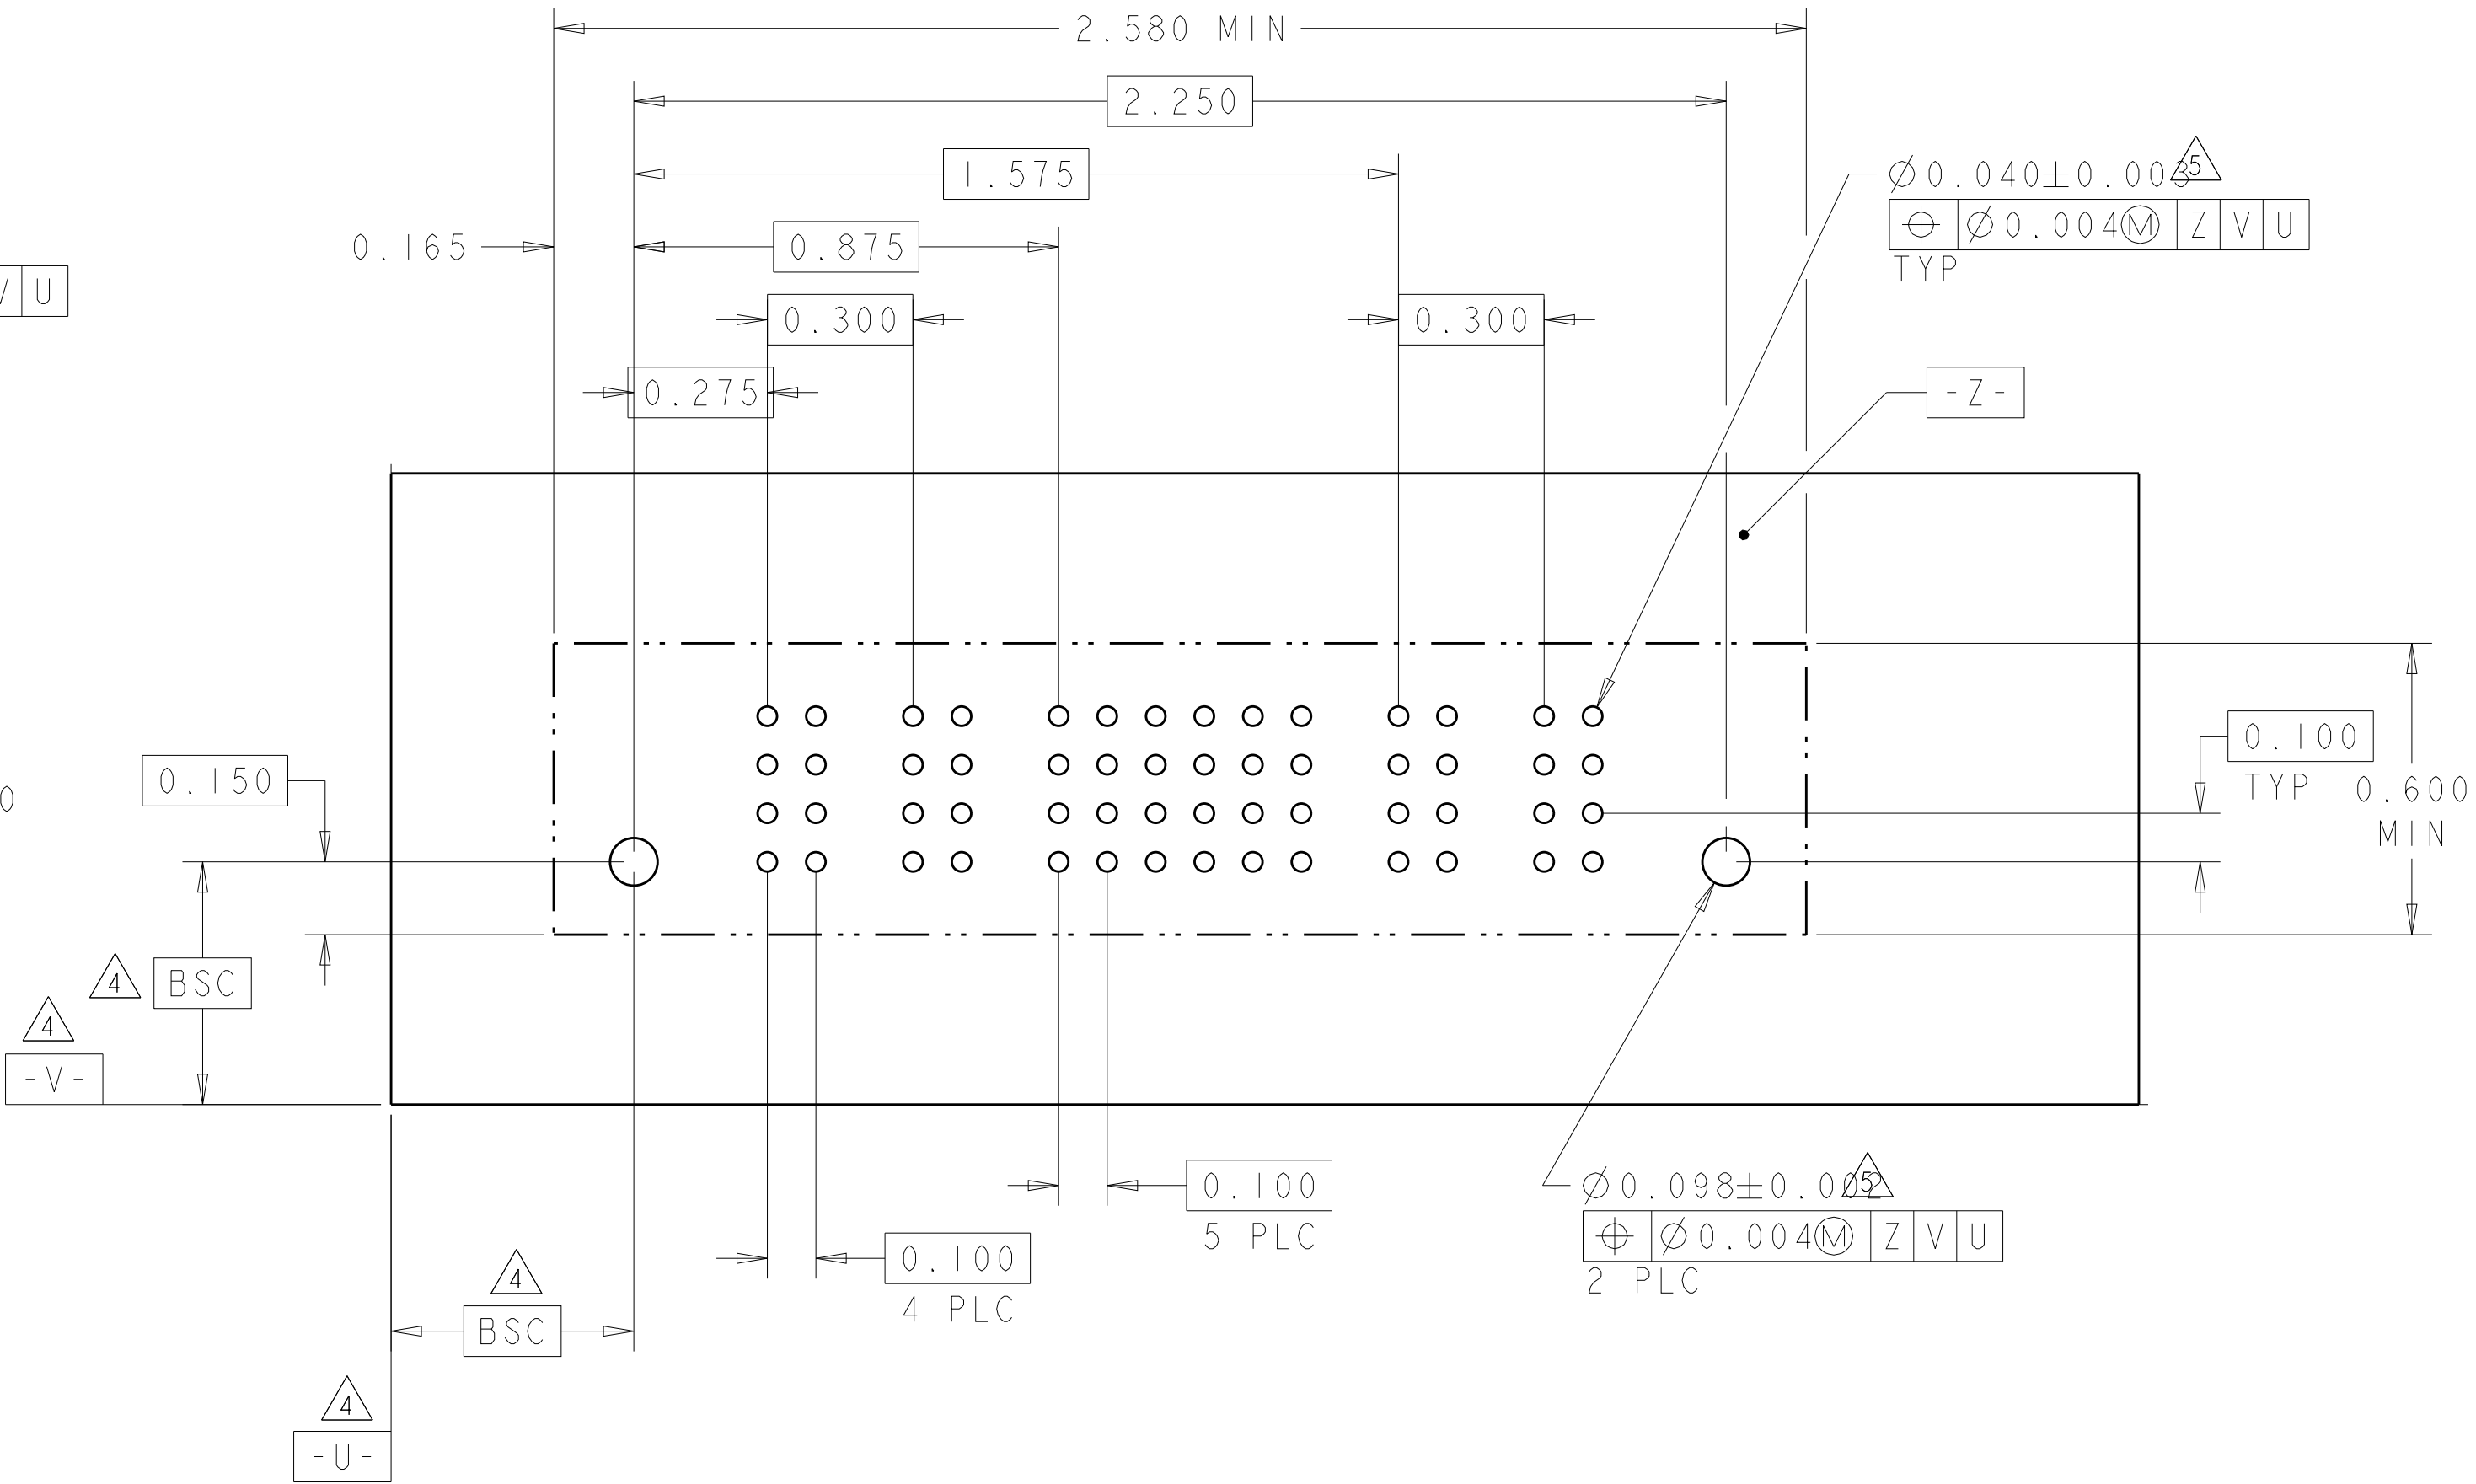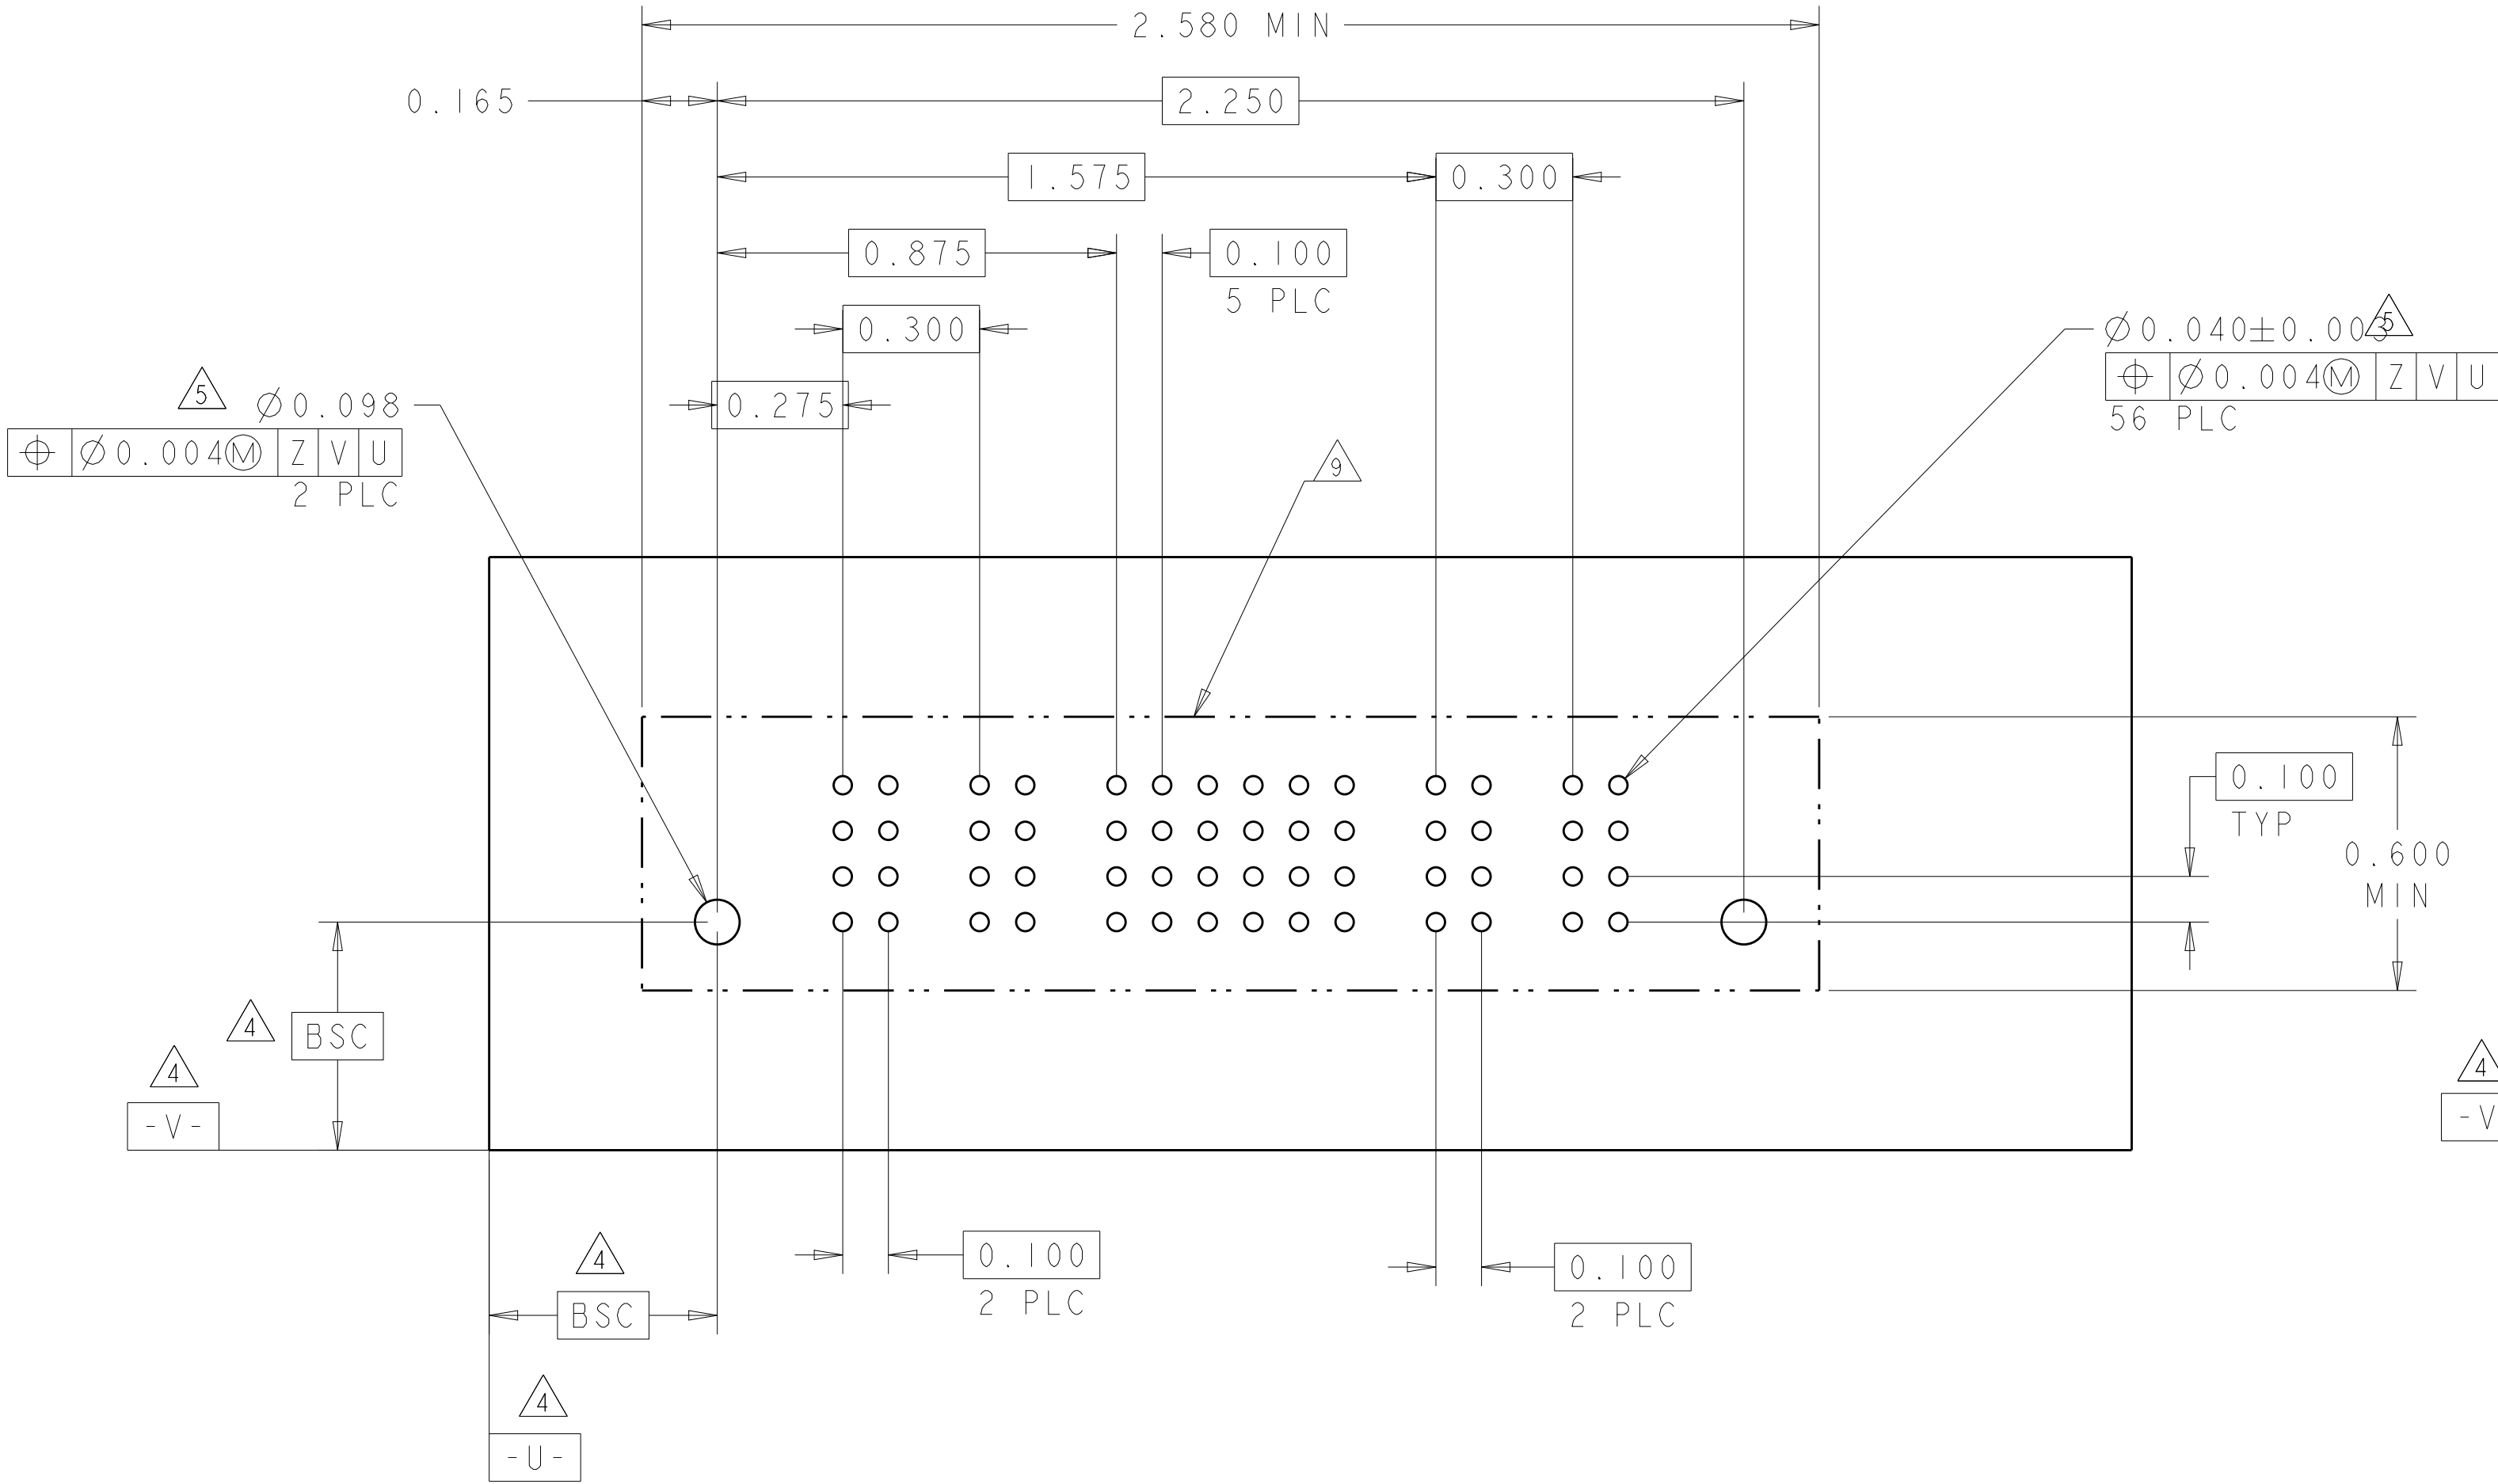

N7



9

4805 (3/11)

[illegible]4805 (3/11)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9