

Surge protection device - TT-2-PE-110 AC - 2858483

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Modular terminal block with two-stage surge protection for a floating double conductor, separate PE connection, nominal voltage: 110 V AC, for mounting on NS 35/7.5, terminal block width 6.2 mm, terminal block height: 54.6 mm

Why buy this product

- ✓ Versions with and without disconnect knife
- ✓ Protection of a floating double wire
- ✓ Protection of two signal wires with common reference potential
- ✓ Multi-stage modular terminal blocks with screw connection technology
- ✓ Disconnection of signal circuits by disconnect knife



Key commercial data

Packing unit	1
Minimum order quantity	1
Catalog page	Page 106 (TT-2011)
GTIN	 4 017918 893156
Custom tariff number	85363010
Country of origin	GERMANY

Technical data

General

Housing material	PA 6.6
Inflammability class according to UL 94	V0
Color	black
Standards for air and creepage distances	IEC 60664-1
Total surge current (8/20) μ s	10 kA
Ambient temperature (operation)	-40 °C ... 85 °C
Mounting type	DIN rail: 35 mm
Design	Double-level terminal block with PE foot – separate PE connection
Number of positions	2
Degree of protection	IP20
Direction of action	Line-Line & Line-Earth Ground

Surge protection device - TT-2-PE-110 AC - 2858483

Technical data

General

Width	6.2 mm
Height	79.6 mm
Depth	54.6 mm

Protective circuit

IEC category	C1
IEC category	C2
IEC category	C3
IEC category	D1
Nominal voltage UN	110 V AC
Maximum continuous operating voltage UC	120 V AC
Maximum continuous voltage UC (wire-wire)	120 V AC
Nominal current IN	300 mA (30 °C)
Operating effective current IC at UC	≤ 5 µA
Ground conductor current IPE	≤ 10 µA
Nominal discharge surge current In (8/20) µs (Core-Core)	5 kA
Nominal discharge surge current In (8/20) µs (Core-Earth)	5 kA
Total surge current (8/20) µs	10 kA
Max. discharge surge current I _{max} (8/20) µs maximum (Core-Core)	5 kA
Max. discharge surge current I _{max} (8/20) µs maximum (Core-Earth)	5 kA
Nominal pulse current I _{an} (10/1000) µs (Core-Earth)	100 A
Lightning test current (10/350) µs, peak value I _{imp}	500 A
Output voltage limitation at 1 kV/µs (Core-Core) spike	≤ 250 V
Output voltage limitation at 1 kV/µs (Core-Earth) spike	≤ 650 V
Protection level UP (Core-Core)	≤ 300 V (C2 - 10 kV / 5 kA)
Protection level UP (Core-Core)	≤ 250 V (C1 - 1 kV/500 A)
Protection level UP (Core-Earth)	≤ 900 V (C2 - 10 kV / 5 kA)
Protection level UP (Core-Earth)	≤ 650 V (C1 - 1 kV/500 A)
Protection level UP (Core-Earth)	≤ 850 V (C3 - 10 A)
Protection level UP (Core-Earth)	≤ 900 V (C3 - 100 A)
Protection level UP (Core-Earth)	≤ 800 V (D1 - 500 A)
Response time t _A (Core-Core)	≤ 1 ns
Response time t _A (Core-Earth)	≤ 100 ns
Input attenuation a _E , sym.	Typ. 1.5 dB (≤ 2 MHz)
Input attenuation a _E , sym.	Typ. 0.6 dB (≤ 500 kHz / 150 Ω)
Cut-off frequency f _g (3 dB), sym. in 50 Ohm system	Typ. 15 MHz
Cut-off frequency f _g (3 dB), sym. in 150 Ohm system	Typ. 8 MHz
Capacity (Core-Core)	Typ. 600 pF
Capacity (Core-Earth)	≤ 2 pF
Resistance in series	9.4 Ω 10 % (per path)
Resistance in series	9.4 Ω
Message: Surge protection fault	None

Surge protection device - TT-2-PE-110 AC - 2858483

Technical data

Protective circuit

Max. required back-up fuse	315 mA (T/IEC 60127-2/3)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	C1 (1 kV / 500 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	C2 (10 kV/5 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C1 (1 kV / 500 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C2 (10 kV/5 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C3 (100 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	D1 (500 A)
Alternating current carrying capacity in acc. with IEC 61643-21 (Core-Core)	0.1 A/1 s
Alternating current carrying capacity in acc. with IEC 61643-21 (Core-Earth)	1 A/1s

Connection data

Connection method	Screw connection
Connection type IN	Screw terminal blocks
Connection type OUT	Screw terminal blocks
Screw thread	M3
Tightening torque	0.8 Nm
Stripping length	8 mm
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14

Connection, protective circuit

Standards/regulations	IEC 61643-21
Standards/regulations	EN 61643-21

Classifications

eclass

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 7.0	27130807

etim

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943

Surge protection device - TT-2-PE-110 AC - 2858483

Classifications

unspsc

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

Approvals

Approvals

Approvals

GOST

Ex Approvals

Approvals submitted

Approval details

GOST



Accessories

Accessories

Assembly

End cover - D-DEK 1,5 BK - 2838995



Cover for setting the end of a TERMITRAB TT-2-PE... and TT-2/2 row of terminal blocks, color: black

Marking

Surge protection device - TT-2-PE-110 AC - 2858483

Accessories

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

Zack Marker strip, flat - ZBF 6:UNBEDRUCKT - 0808710



Zack Marker strip, flat, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into flat marker groove, For terminal block width: 6.2 mm, Lettering field: 5.15 x 6.15 mm

Zack Marker strip, flat - ZBF 6/WH-100:UNBEDRUCKT - 0808736



Zack Marker strip, flat, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into flat marker groove, For terminal block width: 6.2 mm, Lettering field: 5.15 x 6.15 mm

Zack Marker strip, flat - ZBF 6,LGS:FORTL.ZAHLEN - 0808749



Zack Marker strip, flat, Strip, white, Labeled, Printed horizontally: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 100, Mounting type: Snap into flat marker groove, For terminal block width: 6.2 mm, Lettering field: 5.15 x 6.15 mm

Additional products

End cover - D-DEK 1,5 BK - 2838995



Cover for setting the end of a TERMITRAB TT-2-PE... and TT-2/2 row of terminal blocks, color: black

Surge protection device - TT-2-PE-110 AC - 2858483

Accessories

Shield connection - SSA 3-6 - 2839295



shield fast connections for conductor diameter 3 - 6 mm. Potential connection cable: 200 mm, black


Shield connection - SSA 5-10 - 2839512




Shield fast connection for conductor diameters 5 - 10 mm. Potential connection cable: 200 mm, black

Drawings

Dimensioned drawing

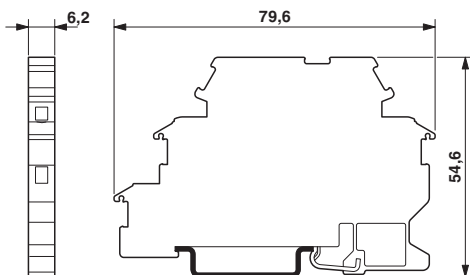

Circuit diagram

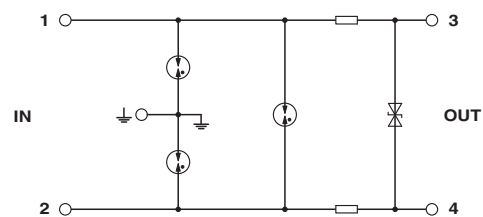

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9