


Technical Data Sheet

RRC-SCC1120 – Single Cell Charger 1120

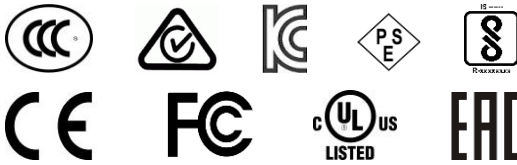

5 Watt Desktop Battery Charger for RRC1120

Features:

- Single bay charger
- For the standard battery RRC1120
- Optimized charging process for RRC battery:
 - Longer cycle life
- Simple operation – Plug and Play
- External wall plug power supply for worldwide use

Applications:

- Standard charging station for mobile devices used in medical, industrial and consumer markets

Specification RRC-SCC1120

Input	
Voltage	5V nom.
Current	1000mA nom.
Power	5W

Output	
Voltage	4.2VDC
Current max.	1A
Voltage tolerance ⁽¹⁾	±1% max.
Current tolerance ⁽¹⁾	±10% max. @1A
Protection	Short circuit Battery over/under temperature Charger over temperature Charge timer

Environmental	
Cooling	convection cooled
Temperature	Operating: 0°C to 40°C Non-operating -10°C to 70°C
Pressure & Altitude	Operating: 1060hPa to 795hPa -382m to 2000m Non-operating: 1060hPa to 572hPa -382m to 4570m
Humidity	5% to 95% r.H., non-condensing

General	
Indicator	Multi-color LED (green, red, orange)
Battery types	Standard battery RRC1120
Green procurement	RoHS 2011/65/EU WEEE 2012/19/EU Chinese RoHS

LED Indications	
Orange light	The inserted battery is of the correct type and is currently being charged.
Green light	The battery is charged and can be removed for use.
Red blinking	Battery detection phase
Red light	No battery inserted, battery over/under temperature-, charger over temperature-, battery over voltage-, battery charge timer time-out-error or input voltage too low

Charger Mechanical Details	
Housing dimensions (LxWxH)	40.6 x 76 x 12.6mm
Weight	15g (excluding power supply)

Notes:

1. Total regulation tolerance includes initial set accuracy, line and load regulation

Technical Data Sheet

RRC-SCC1120 – Single Cell Charger 1120



Safety & EMC		
	In combination with specified external AC/DC power supply	
Regulatory approvals	Europe	CE
Electromagnetic Emissions	Europe	EN55011, EN55022, level B
	USA	FCC15 class B
Electromagnetic Immunity	ESD immunity	EN/IEC61000-4-2
	Electromagnetic field immunity	EN/IEC61000-4-3
	EFT / Burst	EN/IEC61000-4-4
	Surge	EN/IEC61000-4-5
	Conducted Immunity	EN/IEC61000-4-6
	Magnetic Fields	EN/IEC61000-4-8

Specification external AC/DC power supply

Input	
Voltage range	100 - 240VAC
Current	0.3A max.
Stand by power	No load < 0.1W @ 230 VAC

Output	
Voltage range	5VDC
Power	5W max.
Current range	1A
Protection	Over voltage, Short circuit

Environmental	
Temperature	Operating: 0°C to 40°C
	Non-operating -20°C to 60°C

General	
Efficiency	California's Energy Efficiency Level VI
Line regulation	±5%
Ripple & Noise	200mV (p-p)

Power Supply Mechanical Details	
Standard output connector	Micro USB
Housing dimensions (LxWxH)	71 x 60 x 26.5mm for UK
	60 x 26 x 40mm for EU
	60 x 26 x 40mm for KR
	60.3 x 41.5 x 66.3mm for AUS
	60 x 25.2 x 40mm for USA/CAN/JP
	68 x 30 x 35mm for CN
Weight	70g max.

Safety & EMC & Approvals		
Approvals	Europe	CE
	International	CB
	USA/Canada	cULus
	Australia	RCM
	Russia (Customs Union)	EAC
	Korea	KC
	China	CCC
	Japan	PSE
	India	BIS

Germany/Headquarters	USA	Hong Kong	China
RRC power solutions GmbH Technologiepark 1 D-66424 Homburg / Saar	RRC power solutions Inc. 18340 Yorba Linda Blvd., Suite 107-437 Yorba Linda, CA 92886-4104	RRC power solutions Ltd. S-V,6/F, Valiant Industrial Centre 2-12 Au Pui Wan Street Fo Tan, N.T., Hong Kong	RRC power solutions Ltd. Room 520, Yuanlin Building, Aiguo Road No. 3066, Luohu District, Shenzhen 518021
Tel.: +49 6841 98090 Fax: +49 6841 9809280 Email: sales@rrc-ps.de Web: www.rrc-ps.de	Tel.: +1 714 777 3604 Fax: +1 714 777 3658 Email: usa@rrc-ps.com Web: www.rrc-ps.com	Tel.: +852 2376 0106 Fax: +852 2375 0107 Email: hkrrc@rrc-ps.cn Web: www.rrc-ps.com	Tel.: +86 755 8374 1908 Fax: +86 755 8374 1861 Email: hkrrc@rrc-ps.cn Web: www.rrc-ps.com

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9