

## Specification

|             |   |                                                                                                                                                                                                                                                                                                   |
|-------------|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Part No.    | : | <b>CGGBP.35.2.A.08</b>                                                                                                                                                                                                                                                                            |
| Description | : | GPS/GLONASS/GALILEO/BeiDou<br>L1 Embedded Patch Antenna 35x35x2mm                                                                                                                                                                                                                                 |
| Features    | : | Wide-band Operation L1 1559-1610MHz<br>3.45dBi Peak Gain for BeiDou Band<br>3.68dBi Peak Gain for GPS/GALILEO Band<br>4.87dBi Peak Gain for GLONASS Band<br>Low profile – 2mm Height<br>Pin type Ceramic Patch Antenna<br>Manufactured in an IATF16949 Approved Facility<br><b>RoHS compliant</b> |



## 1. Introduction

The CGGBP.35.2.A.08 is a ceramic GNSS L1 GPS/GLONASS/GALILEO/BeiDou embedded passive patch antenna, with a low profile of 2mm thickness. It is designed for professional applications in vehicle navigation devices as well as other M2M devices. Typical uses are in transportation, defense, marine, agriculture, and navigation.

Compared to using a smaller antenna, this will translate into the GNSS system having much higher location accuracy, improved reliability of lock in urban areas, better signal reception, with more satellites acquired and a quicker time to first fix. The CGGBP.35.2.A.08 is manufactured and tested in a TS16949 first tier automotive approved facility.

The patch is mounted via pin and double-sided adhesive. While the antenna will work very well in most device environments (Note cannot be covered with metal enclosure), tuning and further optimization of this antenna to different ground-planes and enclosures can be done if required, also including a pin length change, subject to possible NRE and minimum order quantity. Contact your local Taoglas sales office for more details.


## 2. Specification

| ELECTRICAL            |                   |                           |           |
|-----------------------|-------------------|---------------------------|-----------|
| Application Bands     | BeiDou            | GPS/GALILEO               | GLONASS   |
| Frequency             | 1561.098±2.046MHz | 1575.42 ±1.023MHz         | 1602±5MHz |
| Efficiency            | 58.60 %           | 59.94 %                   | 71.33%    |
| Peak Gain             | 3.45dBi           | 3.68dBi                   | 4.87dBi   |
| Average Gain          | -2.32dBi          | -2.22dBi                  | -1.47dBi  |
| Impedance             | 50 ohms           |                           |           |
| MECHANICAL            |                   |                           |           |
| Ceramic Dimension     |                   | 35.5 x 35.5 x 2mm         |           |
| Material              |                   | Ceramic                   |           |
| Pin Diameter          |                   | 0.85mm                    |           |
| Pin Length            |                   | 2.4mm                     |           |
| Weight                |                   | 8.6g                      |           |
| ENVIRONMENTAL         |                   |                           |           |
| Operation Temperature |                   | -40℃ to 85℃               |           |
| Storage Temperature   |                   | -40℃ to 105℃              |           |
| Humidity              |                   | Non-condensing 65℃ 95% RH |           |


\* Antenna properties were measured with the antenna mounted on 70\*70mm Ground Plane

## 3. Antenna Characteristics


### 3.1. Return Loss

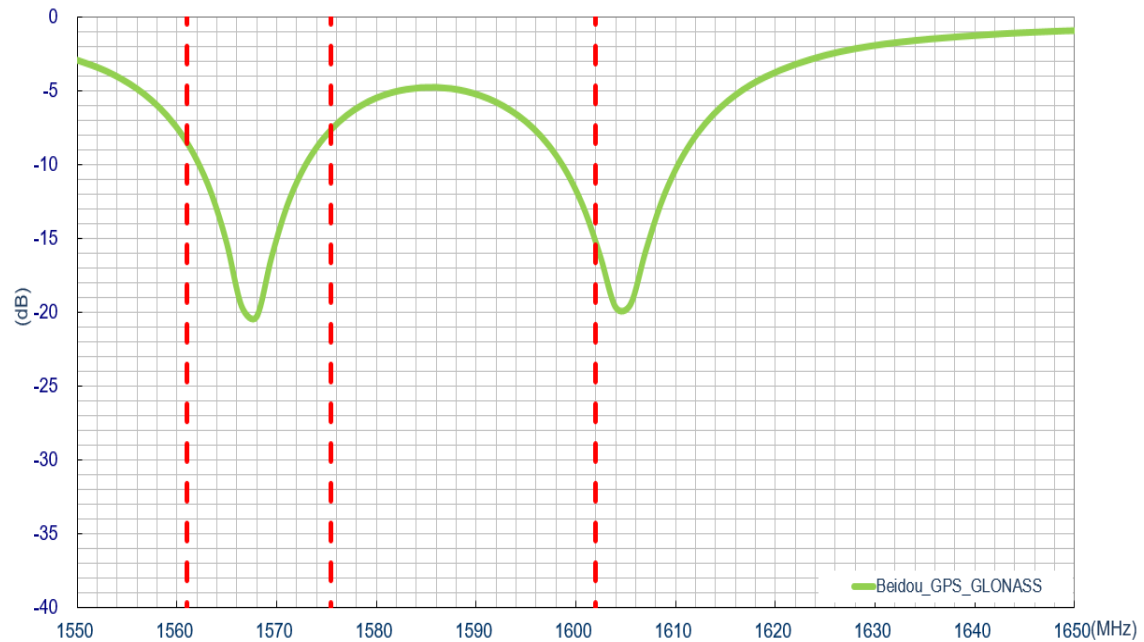


### 3.2. VSWR

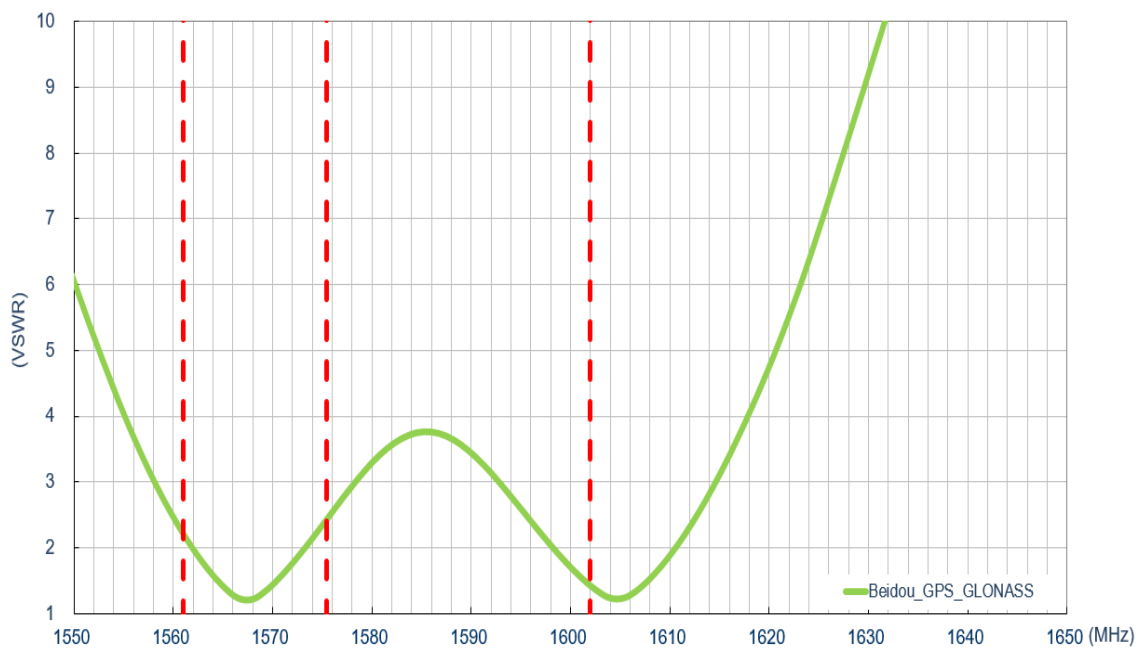


### 3.3. Efficiency

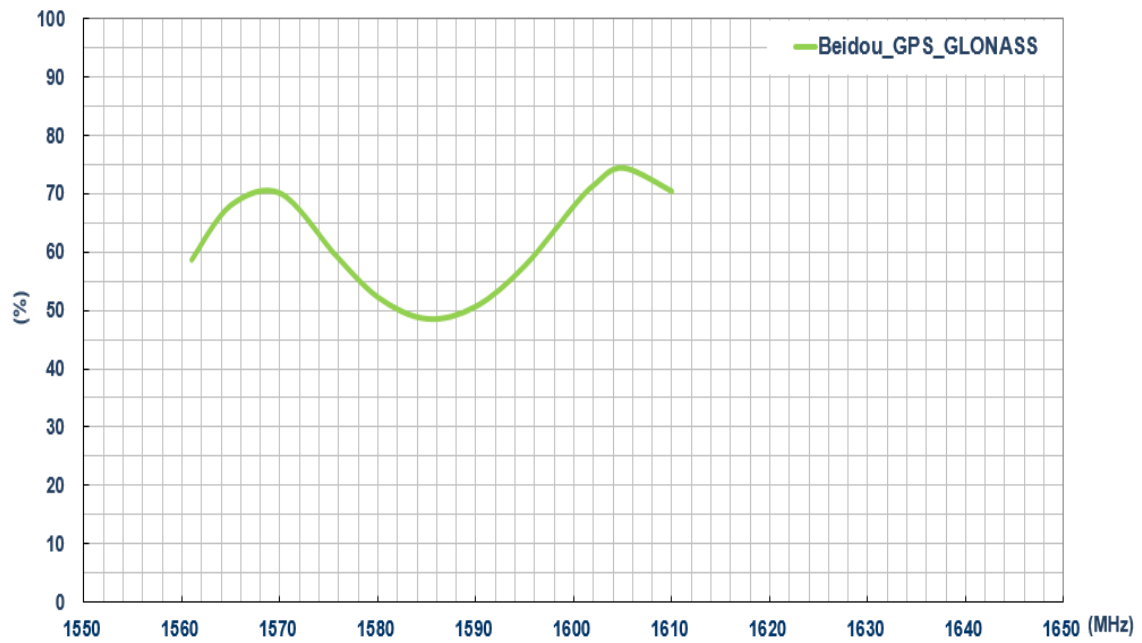


### 3.4. Average Gain

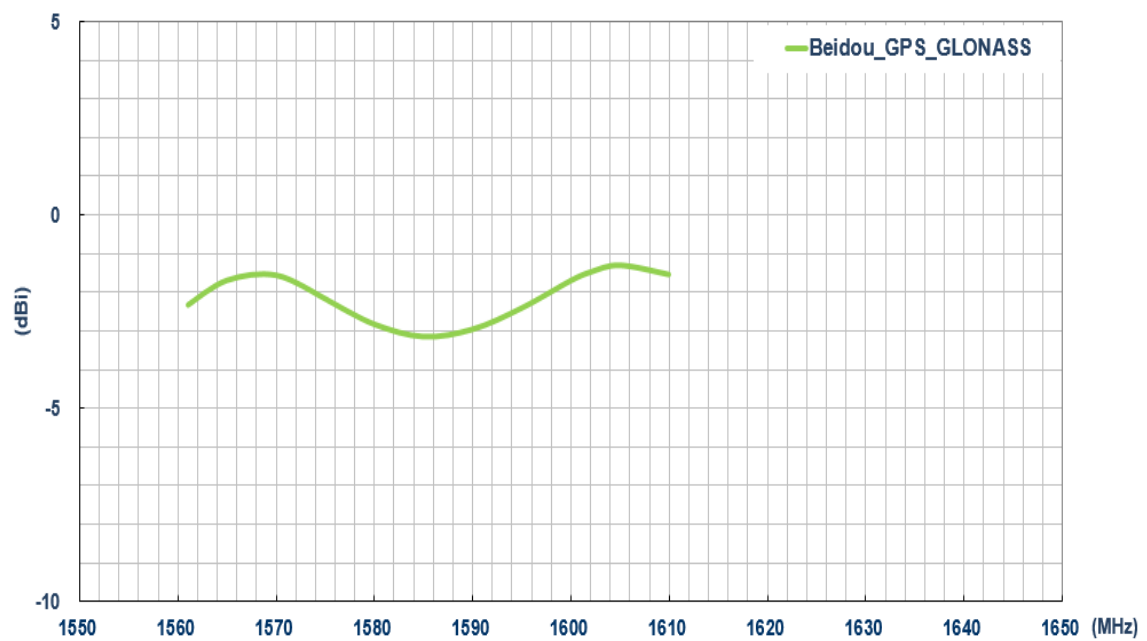

### 3.5. Peak Gain

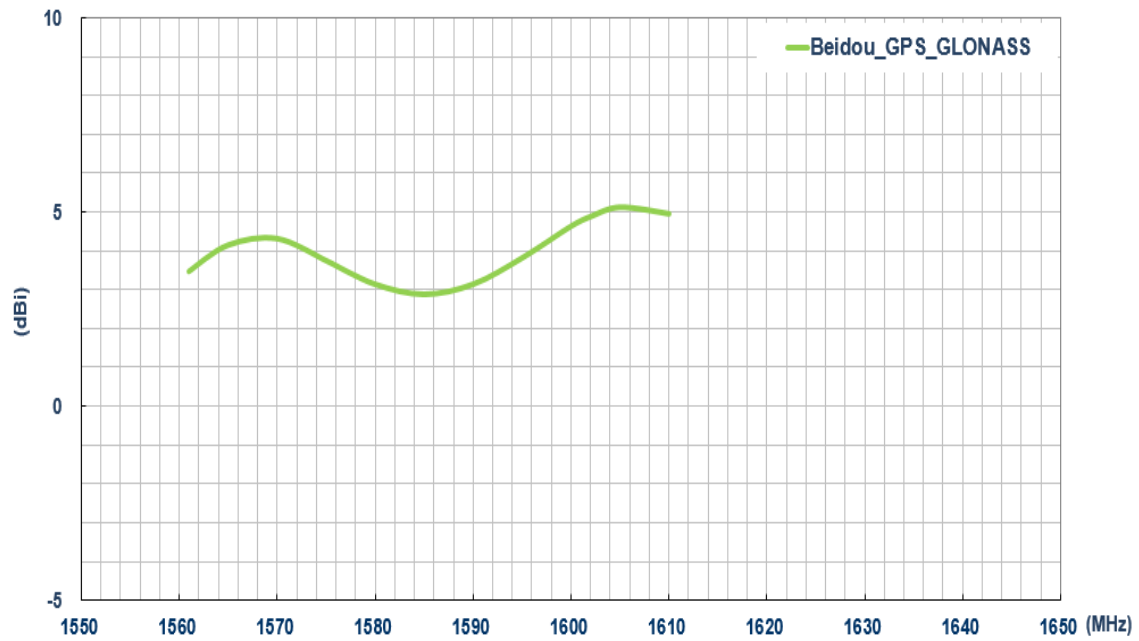


### 3.6. Smith Chart

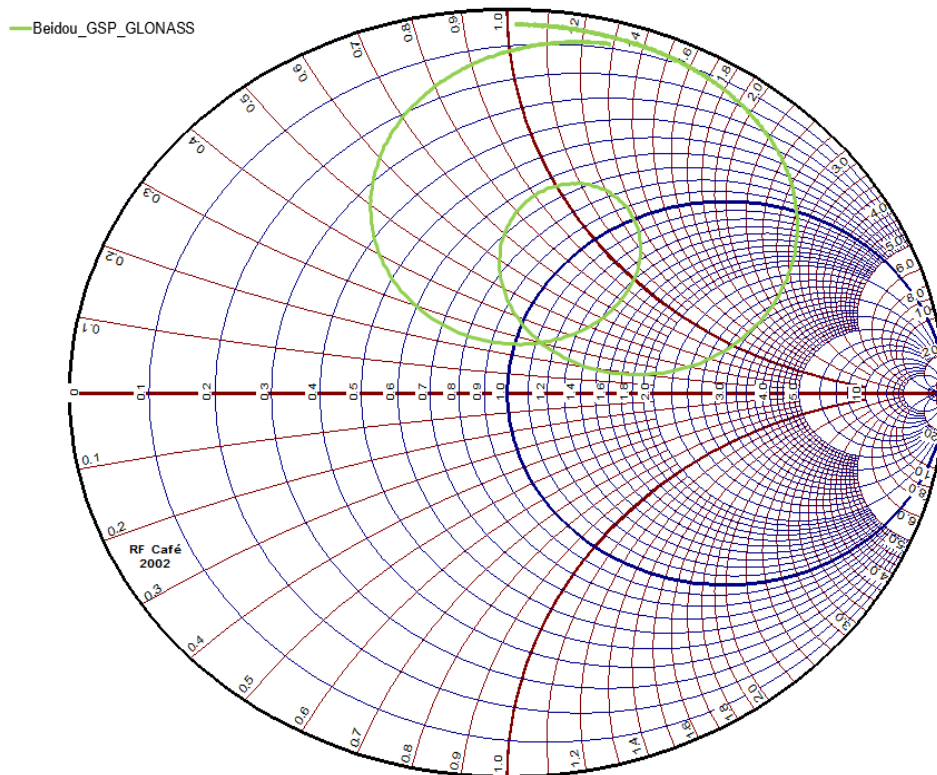


## 4. Antenna Radiation Pattern

### 4.1. Test Setup

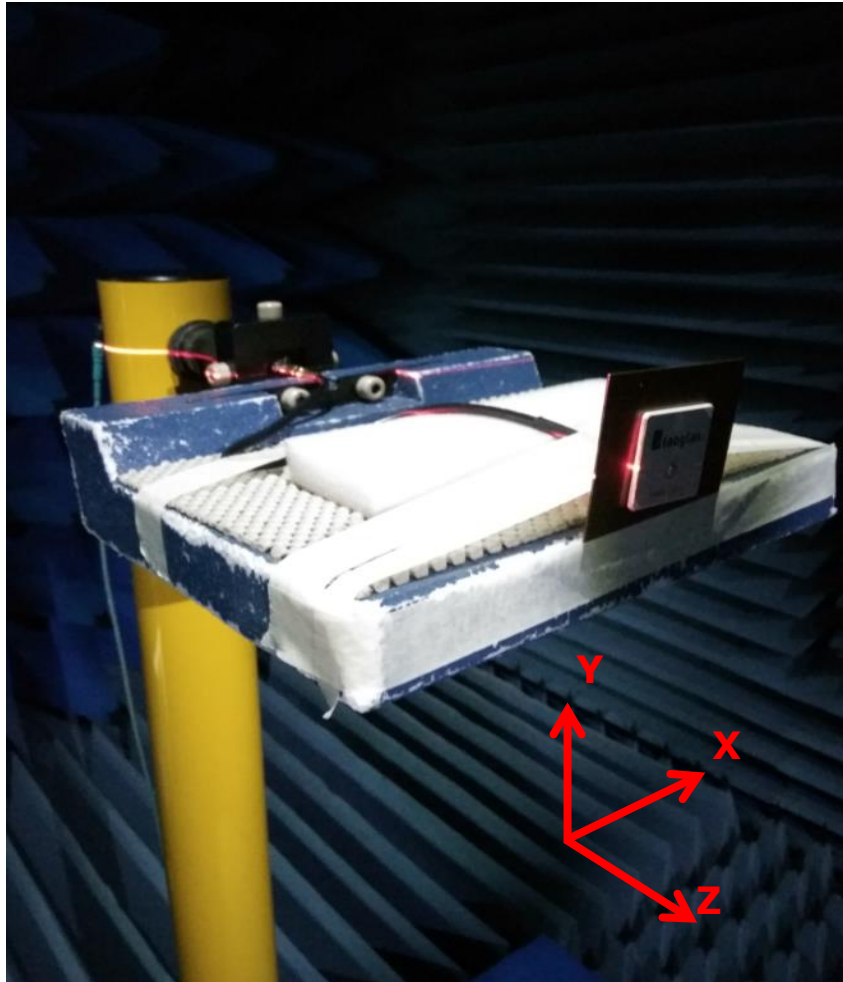


## 4.2. 2D Radiation Pattern


XY Plane

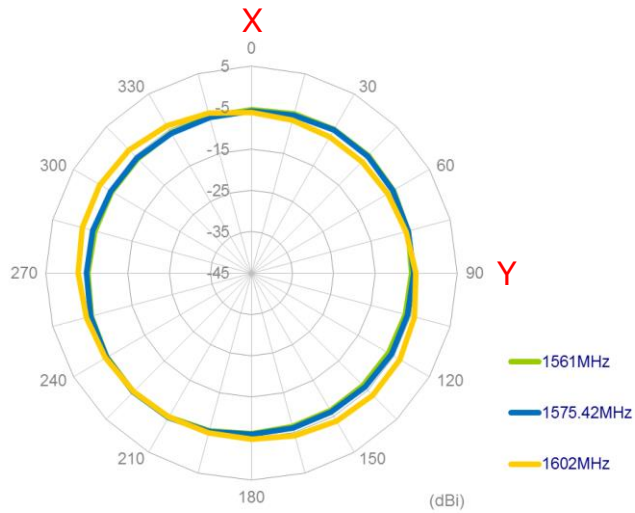


XZ Plane

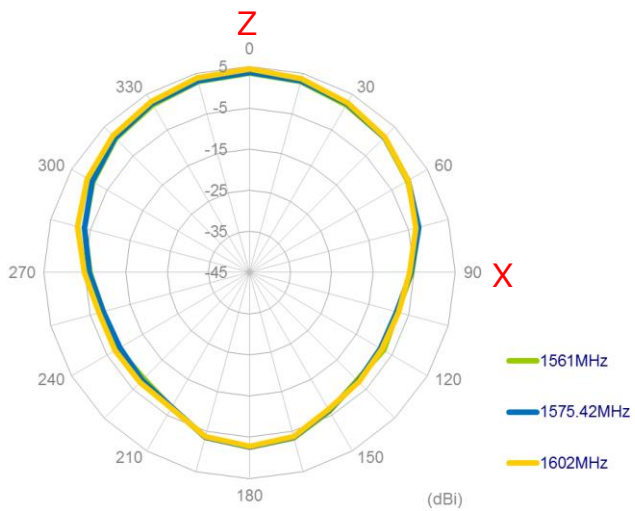


YZ Plane

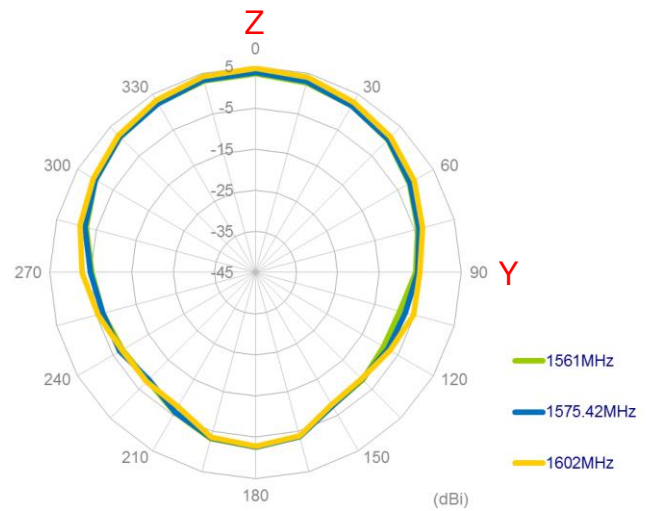


### 4.3. 3D Radiation Pattern

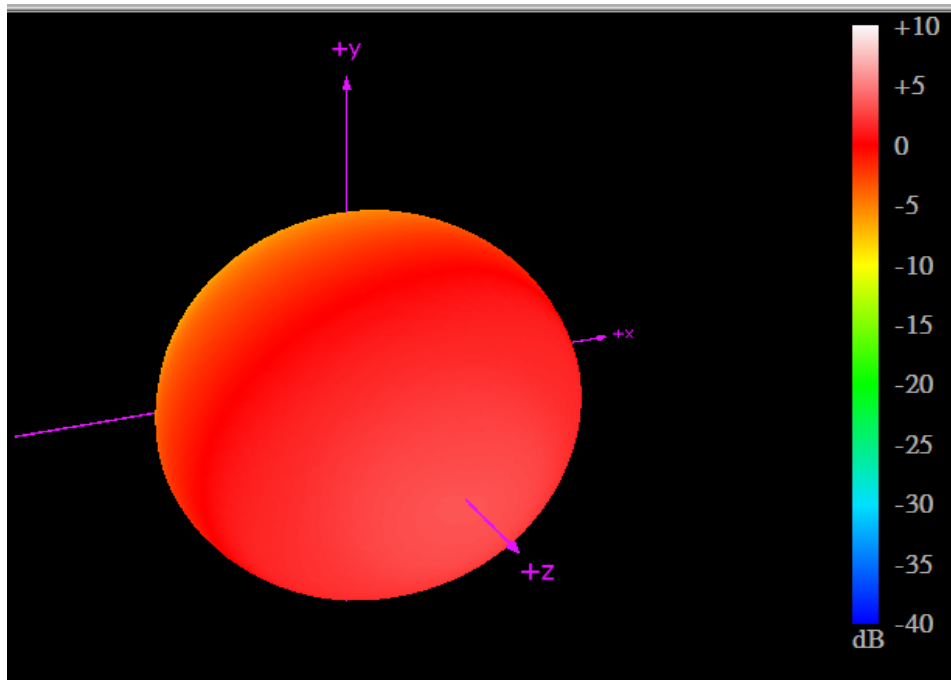

1561MHz

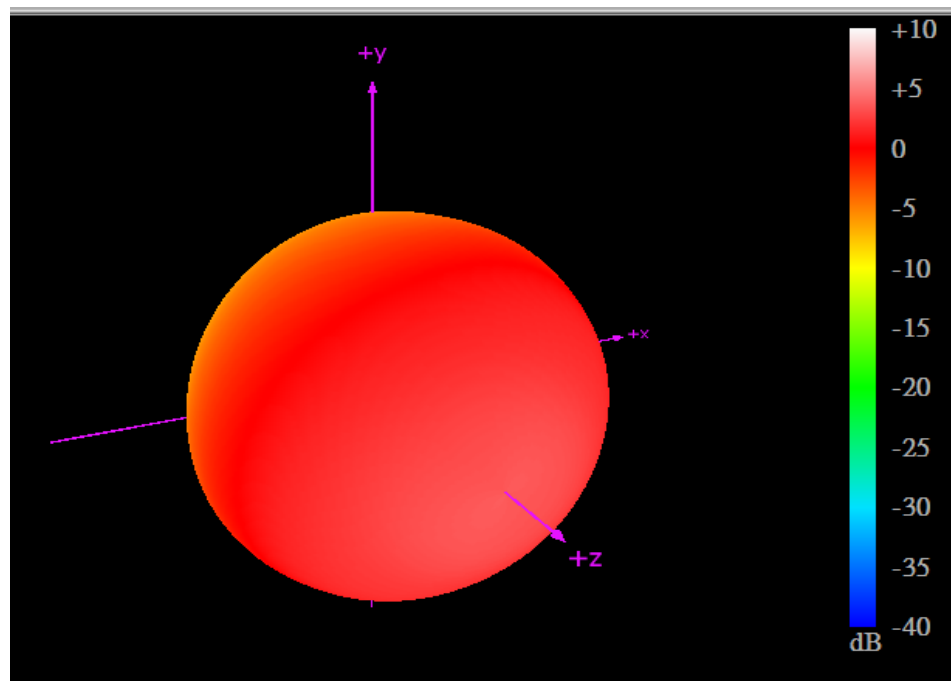


1575.42MHz

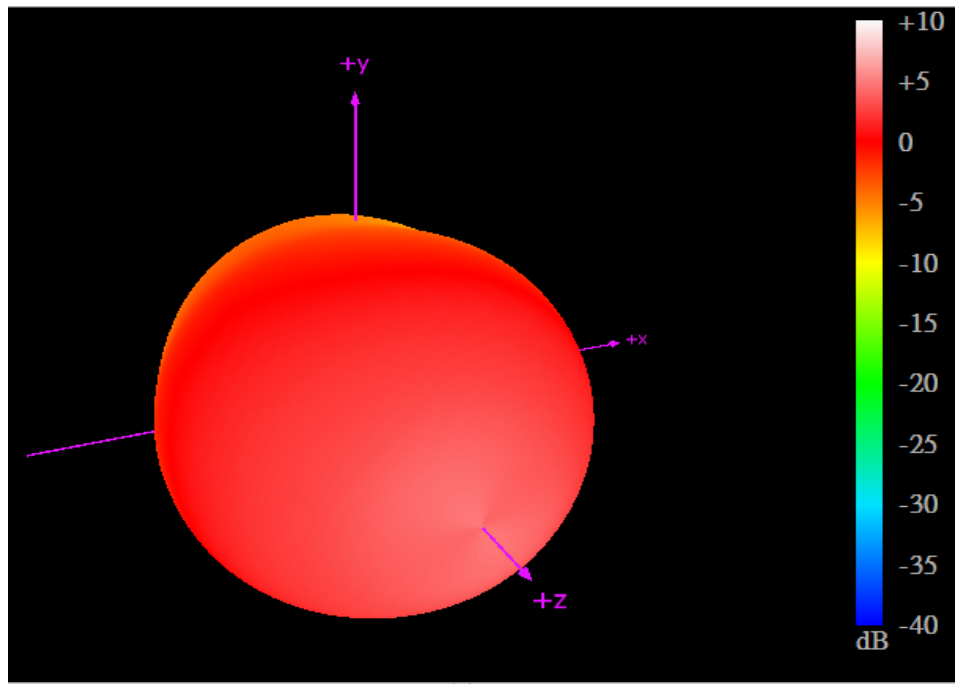


1602MHz

## 5. Mechanical Drawing (Unit: mm)

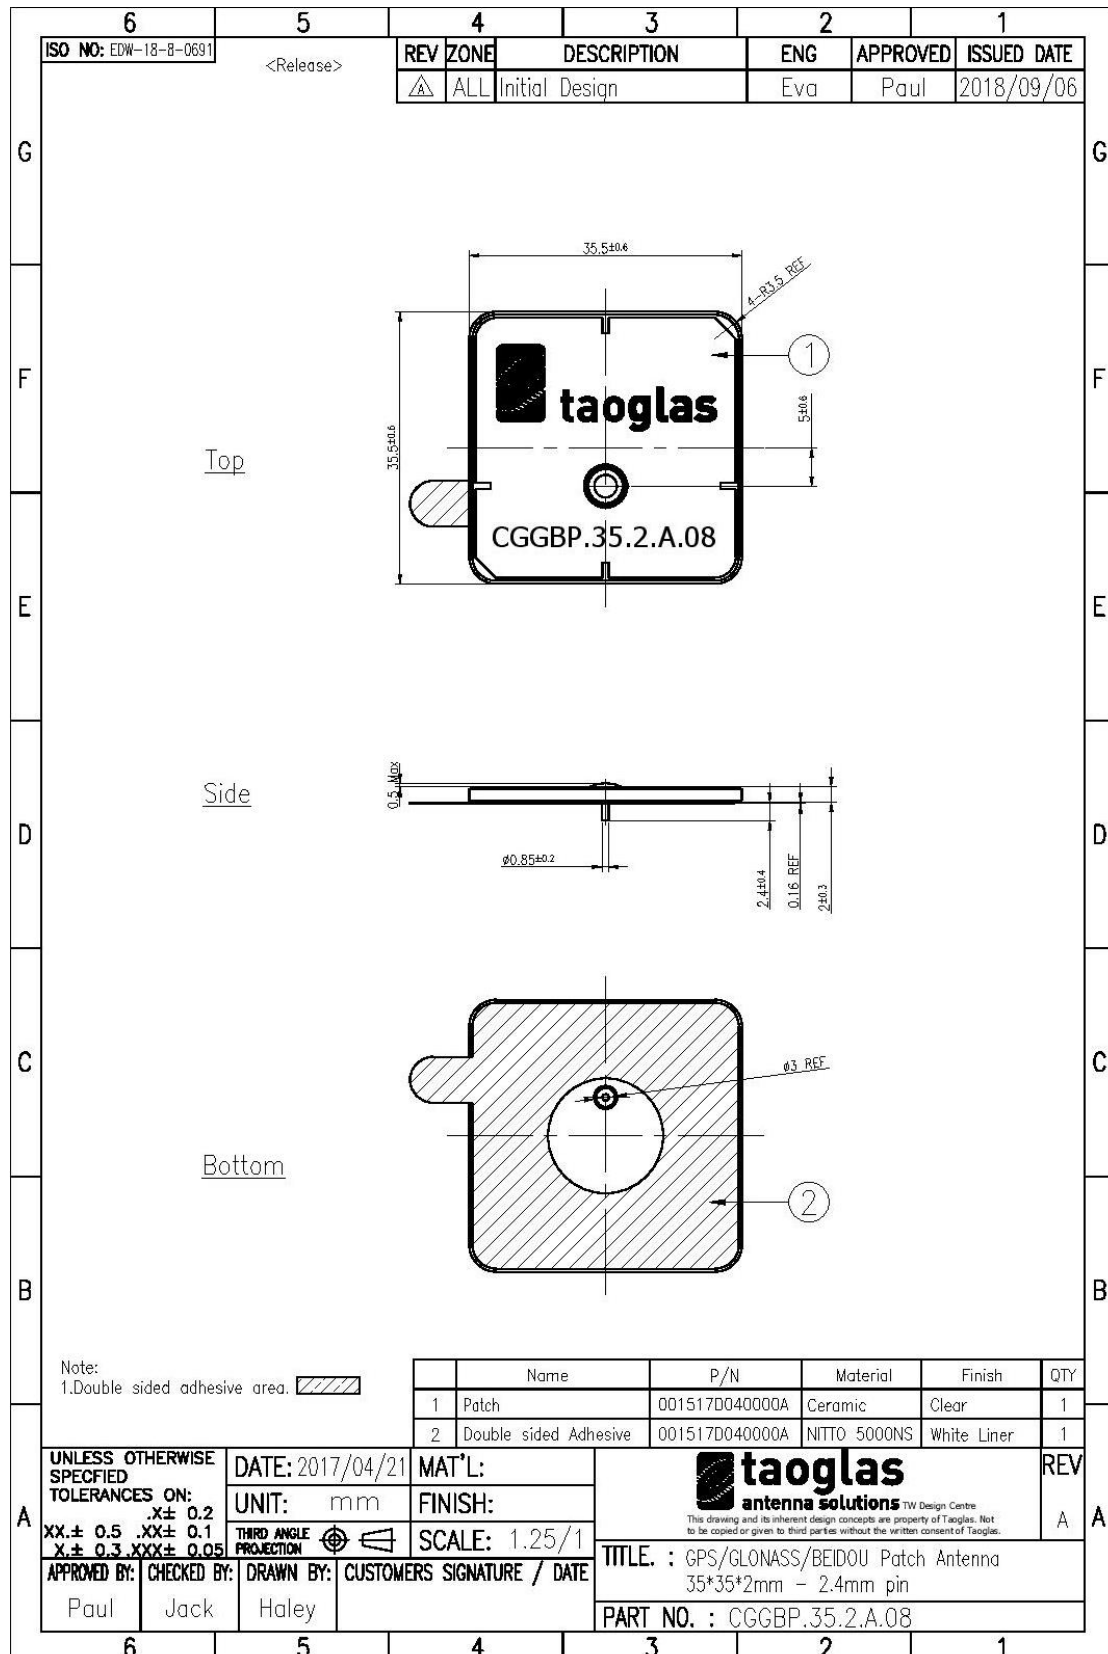


## 5.1. Adhesive Thickness

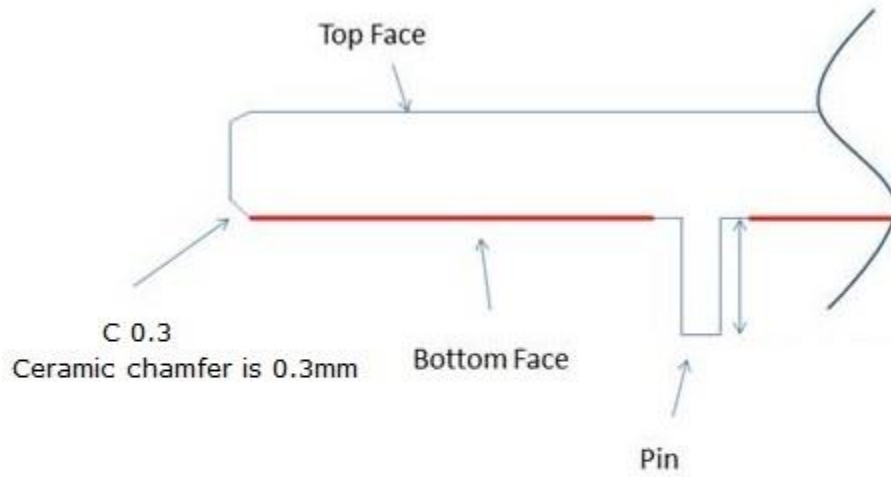


Red Line shows the adhesive without Liner - thickness 0.08~0.1mm

## 5.2. PCB Footprint Recommendation

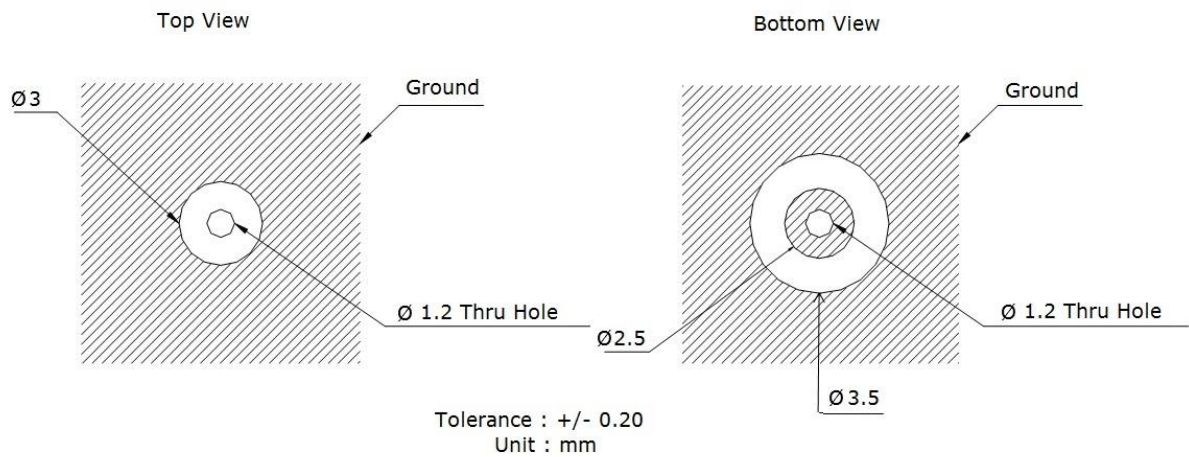


## 6. Packaging

100 pcs CGGBP.35.2.A.08 per PE Bag  
Bag Dimensions - 360 x 380mm  
Weight - 934.5g

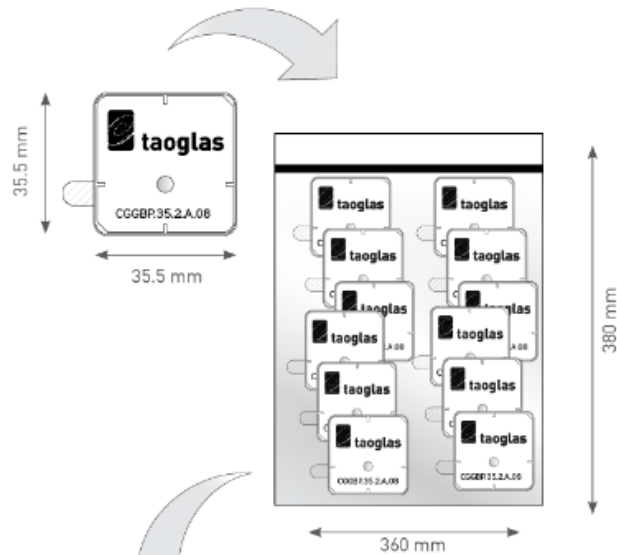


400 pcs CGGBP.35.2.A.08 per Inner Carton  
Inner Carton Dimensions - 270\*260\*300mm  
Weight - 4.49kg

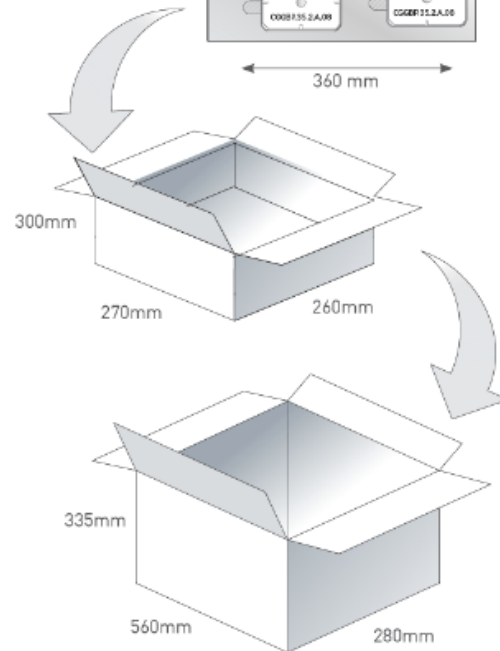

800 pcs CGGBP.35.2.A.08 per Carton  
Carton Dimensions - 560\*280\*335mm  
Weight - 8.1kg

Pallet Dimensions 1200\*1000\*1220mm  
18 Cartons per Pallet  
6 Cartons per layer  
3 Layers

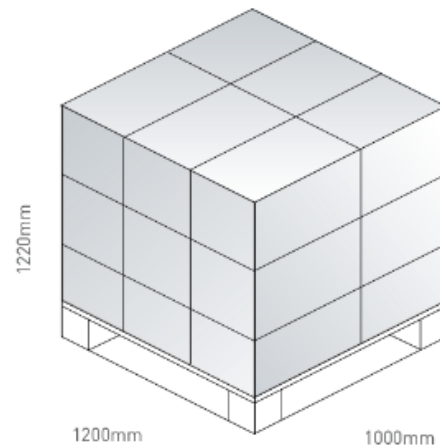

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9