

SPECIFICATION CONTROL DRAWING			55A8001	
TITLE	WIRE, RADIATION-CROSSLINKED, MODIFIED ETFE-INSULATED, THERMOCOUPLE EXTENSION, NORMAL WEIGHT	Date	9-21-12	Revision M
This specification sheet forms a part of the latest issue of Raychem Specification 55A.				

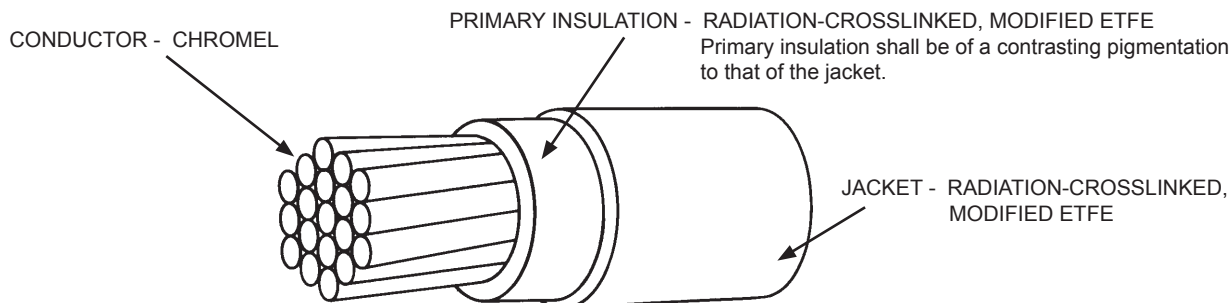


TABLE I. CONSTRUCTION DETAILS						
PART NUMBER 1/	WIRE SIZE (AWG)	CONDUCTOR STRANDING (number x AWG)	DIAMETER OF STRANDED CONDUCTOR (in.)		FINISHED WIRE	
			NOMINAL	MAXIMUM	DIAMETER (in.)	MAXIMUM WEIGHT (lbs/1000 ft.)
55A8001-30-*	30	7 x 38	.012	----	.032 ± .002	.98
55A8001-26-*	26	7 x 34	.019	----	.040 ± .002	1.8
55A8001-24-*	24	19 x 36	-----	.026	.045 ± .002	2.5
55A8001-22-*	22	19 x 34	----	.033	.051 ± .003	3.4
55A8001-20-*	20	19 x 32	----	.041	.059 ± .003	5.0
55A8001-18-*	18	19 x 30	----	.051	.070 ± .003	7.3
55A8001-16-*	16	19 x 29	----	.058	.078 ± .004	9.4

TABLE II. PERFORMANCE DETAILS				
PART NUMBER 1/	BEND TESTING			
	MANDREL DIAMETER (inch) (± 3%)		WEIGHT (lb) (± 3%)	
	ACCELERATED AGING	COLD BEND	ACCELERATED AGING	COLD BEND
55A8001-30-*	.375	1.00	.250	2.00
55A8001-26-*	.500	1.00	.750	3.00
55A8001-24-*	.500	1.00	.750	3.00
55A8001-22-*	.500	1.00	1.00	3.00
55A8001-20-*	.500	1.00	1.50	4.00
55A8001-18-*	.750	1.50	2.00	4.00
55A8001-16-*	1.00	1.50	2.00	5.00

CHROMEL and ALUMEL are federally registered trademarks of Hoskins Manufacturing Company. Alternative conductors, exhibiting the same performance characteristics, may be substituted for one or both of the CHROMEL and ALUMEL conductors.

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics Corporation also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.			
1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER. AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.			
Page 1 of 2	Alumel, Chromel, Raychem, TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.		 Raychem Wire & Cable 501 Oakside Avenue Redwood City, CA 94063-3800 Phone: 1-800-227-8816 Fax: 1-650-361-6297
	DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.		
	THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.		

WIRE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C

Maximum continuous conductor temperature

ACCELERATED AGING (CROSSLINKING PROOF): 300 ± 3°C for 7 hours

CONCENTRICITY: 70% (minimum)

FLAMMABILITY (Qualification Test): Procedure 1, 3 seconds (maximum); 3 in. (maximum);
no flaming of facial tissue

IDENTIFICATION AND COLOR STRIPING DURABILITY (AWG 24 - 16 only):

125 cycles (250 strokes) (minimum), 500 g weight

INSULATION ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in² (minimum)

INSULATION FLAWS:

Primary Insulation,

Spark Test, 1.5 kV (rms)

Finished Wire,

Spark Test, 5.7 kV (rms) at 3 kHz

Impulse Dielectric Test, 8.0 kV (peak)

INSULATION RESISTANCE: 5000 megohms for 1000 ft (minimum)

INSULATION THICKNESS: 0.008 in. (minimum), total both layers

LOW TEMPERATURE-COLD BEND (Qualification Test): -65 ± 2°C for 4 hours

SHRINKAGE: 230 ± 3°C for 6 hours, 0.125 in. (maximum) in 12 in.

VOLTAGE WITHSTAND TEST (Post Environmental): 2500 volts (rms), 60 Hz

WICKING: 2.25 in. (maximum)

PART NUMBER:

The “*” in the part numbers on page 1 shall be replaced by one of the color code designators shown below.

1/ Example: AWG 24,

Per MIL-STD-687: white, 55A8001-24-9

Per ANSI MC96.1: yellow, 55A8001-24-4 or

purple, 55A8001-24-7

Per British Standard Code BS: brown, 55A8001-24-1

Per International Standard IEC 584-3: green, 55A8001-24-5

EMF with known standard ALUMEL shall be 4.00 mV (minimum), 4.19 mV (maximum), at 100°C
with reference junction corrected to 0°C per ANSI MC96.1.

EMF with known standard Constantan shall be 6.21 mV (minimum), 6.43 mV (maximum), at 100°C
with reference junction corrected to 0°C per ANSI MC96.1.

1/ See footer section on page 1

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9