


High Voltage Non-inductive Resistors

WHVL Series

- Voltage ratings 11 to 67kV
- Non-inductive printed serpentine design
- Tolerance down to 0.1%
- TCR down to 15ppm
- VCR down to -0.04ppm/V
- Non-magnetic materials
- RoHS compliant

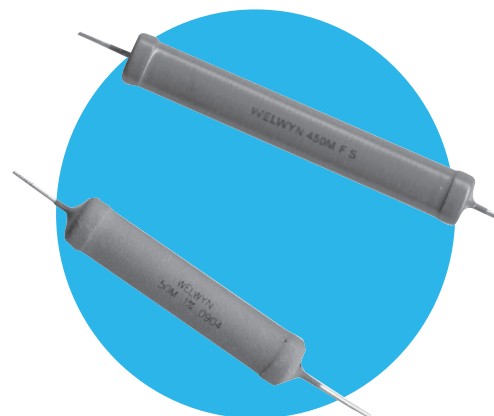

 All parts are Pb-free and comply with EU Directive 2011/65/EU (RoHS2)

Electrical Data


		WHVL2	WHVL3	WHVL5	WHVL7	WHVL10	WHVL12	WHVL15
Power rating at 25°C	watts	3.8	5	7.5	10	13.5	16	20
Power rating at 70°C	watts	2.9	3.8	5.6	7.5	10	12	15
Limiting element voltage in air	kV	11	14	22	33	45	54	67
Limiting element voltage in oil*	kV	22	28	44	66	90	108	134
Resistance range	ohms	1K0 – 100G						
Resistance tolerance	%	≤10G: 0.1%, 0.25%, 0.5%, 1%, 2%, 5% >10G: 0.25%, 0.5%, 1%, 2%, 5%						
TCR (25°C to 75°C)	ppm/°C	≤10G: 15, 25, 50, 100 >10G: 25, 50, 100						
Standard values		E 24 preferred						
Ambient temperature range	°C	-55 to +225						
Insulation resistance at 500V	ohms	>10G						
Dielectric strength of insulation	V	>1000						

* Protection code P

Physical Data

Dimensions in mm, weight in g								
Type	L (±0.5)	L1 (Max)	D (±0.5)	f (±2)	d (±0.05)	Wt. nom		
WHVL2	27	33.5	8.0	37	0.8	4.5		
WHVL3	37	43.5				6.3		
WHVL5	52	58.5				8.1		
WHVL7	77	83.5				11.8		
WHVL10	102	108.5	8.3	37	0.8	15.3		
WHVL12	122	128.5	8.5			17.7		
WHVL15	152	158.5				22.5		

The diagram illustrates the physical dimensions of the WHVL component. It features a central rectangular body with rounded ends, flanked by two thin horizontal sections. The dimensions are labeled as follows: L is the total length of the component; L1 is the length of the central body; D is the diameter of the central body; f is the distance from the center of the body to the end of the component; and d is the thickness of the component.

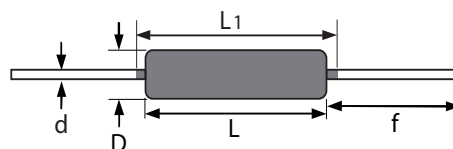

Construction

Termination conductors and ruthenium oxide resistive material are printed in a non-inductive pattern onto the surface of a 96% alumina rod to which termination caps and terminal wires are then attached. The body of the resistor is then conformally coated either in silicone (protection code C) or in epoxy (protection code P).

Terminations

The termination wires are gold plated.

Marking

Type reference, resistance value and tolerance are legend marked. The resistance value code conforms to IEC 62.

Solvent Resistance

The body protection and marking are resistant to all normal industrial cleaning solvents suitable for printed circuits.

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

WHVL Series

Performance Data

		Maximum	Typical
Load at rated power: 1000 hours at 25°C	$\Delta R\%$	0.25	0.1
Overload: 1.5 x rated power not exceeding LEV for 5 seconds	$\Delta R\%$	0.25	0.1
Moisture resistance: MIL Std. 202, method 106	$\Delta R\%$	0.25	0.1
Thermal shock: MIL Std. 202, method 107, condition C	$\Delta R\%$	0.2	0.1

Type	Typical VCR (ppm/V)	
WHVL2	<500M: -0.4	500M to 5G0: -0.75
WHVL3	<1G0: -0.2	1G0 to 10G: -0.4
WHVL5	<1G5: -0.15	1G5 to 15G: -0.3
WHVL7	<2G5: -0.1	2G5 to 25G: -0.15
WHVL10	<3G0: -0.08	3G0 to 30G: -0.12
WHVL12	<4G0: -0.06	4G0 to 40G: -0.1
WHVL15	<5G0: -0.04	5G0 to 50G: -0.08

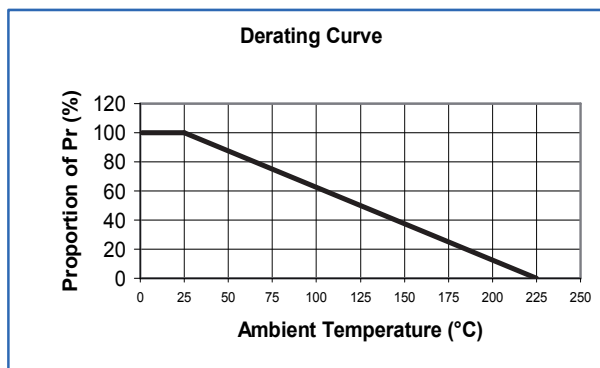

Application Notes

Due to the high voltage which can appear between the end cap and any adjacent metal part, resistors should be mounted at an adequate distance from other conductors.

For some ultra-high voltage applications it is required to immerse the components in oil or SF₆ gas or pot them in void-free silicone compound to reduce corona or surface tracking. The epoxy protection, code P, is suitable for these applications.

The axial termination should not be bent closer than twice the diameter of the terminal wire from the resistor body.

Ordering Procedure

Example: WHVL10 with conformal coat at 100 megohms, 1% tolerance & $\pm 50\text{ppm}/^\circ\text{C}$ TCR:

W H V L 1 0 C C - 1 0 0 M F B

Type _____

Size _____

Protection _____

C	Silicone	Standard, for use in air
P	Epoxy	Low outgasing, for use in oil or SF ₆

TCR _____

Y	15ppm/°C	C	50ppm/°C
D	25ppm/°C	Z	100ppm/°C

Value (use IEC62 code) _____

Tolerance (use IEC62 code) _____

C	0.25%	F	1%	J	5%
B	0.1%	D	0.5%	G	2%

Packing _____

A	WHVL2, 3 & 5	Tape & Ammo
B	WHVL7, 10, 12 & 15	Bulk Pack

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.

All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9