# Headset Detection Interface with Send/End Detect

The NCS2302 is a compact and cost effective headset detection interface IC. It integrates several circuit blocks to detect the presence of a stereo headset with a microphone and whether the send/end button has been pressed. The NMOS transistor on the MIC pin mutes the signal when the headset is not present. The built in resistor divider provides the reference voltage for detecting the left audio channel. When L\_DET and GND\_DET are pulled low, the logic low output of the OR gate indicates the headset has been connected properly and the MIC pull–down is disabled. A comparator is integrated for detecting the send/end button press. The NCS2302 comes in a space–saving UQFN10 package (1.4 x 1.8 mm).

#### **Features**

- Wide Supply Voltage Ranges:
  - For Headset Detection Circuit:  $V_{DD}$  = 1.6 V to 2.5 V For S/E Comparator Circuit:  $V_{DD2}$  = 1.6 V to 2.8 V
- Low Quiescent Supply Current: 17 µA typical
- Space Saving UQFN10 Package
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

## **Typical Applications**

- Cell Phones, Smartphones
- Tablets
- Notebooks



## ON Semiconductor®

http://onsemi.com



#### **MARKING DIAGRAM**




AQ = Specific Device Code

M = Date Code

= Pb-Free Package

(Note: Microdot may be in either location)

#### **PIN DIAGRAM**



#### Top View

#### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
NCS2302MUTAG	UQFN10 (Pb-Free)	3000 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

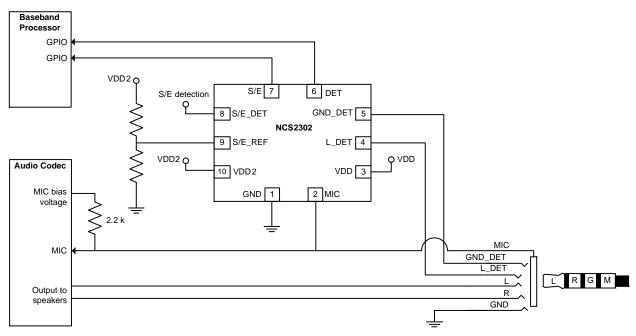


Figure 1. Simplified Application Schematic

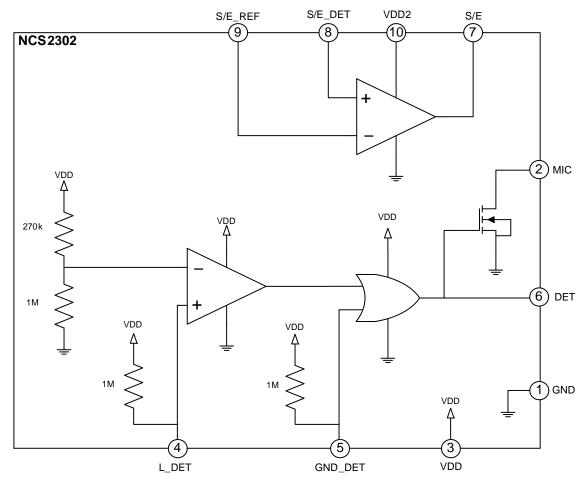


Figure 2. Block Diagram

**Table 1. OUTPUT LOGIC** 

Inp	uts	Outputs		
L_detect	GND_detect	DET	MIC	Headset
0	0	0	1 (external pull-up)	Detected
0	1	1	0	
1	0	1	0	Not Detected
1	1	1	0	

**Table 2. PIN DESCRIPTION** 

Pin	Name	Туре	Description		
1	GND	Power	Connects to system ground.		
2	MIC	Output	The open drain MIC pin is connected to the audio jack MIC pin. The MIC pin will pull low when the headset is not connected. When the headset is detected, the internal pull–down is disabled and the external pull–up biases the microphone.		
3	VDD	Power	Supply voltage pin for headset detection circuit. A bypass capacitor of 0.1 $\mu F$ is recommended as close as possible to this pin.		
4	L_DET	Input	Connect to audio jack L_DET. This pin is pulled low when the headset is present.		
5	GND_DET	Input	Connect to audio jack GND_DET. This pin is pulled low when the headset is present.		
6	DET	Output	Indicates whether headset has been detected. Headset is detected when DET is low.		
7	S/E	Output	Indicates whether send/end button press has been detected. Button press is detected when S/E is low.		
8	S/E_DET	Input	Non-inverting input of the comparator detects whether the send/end button has been press		
9	S/E_REF	Input	Inverting input of the comparator sets a voltage reference with an external resistor divider		
10	VDD2	Power	Supply voltage pin for S/E detection comparator. A bypass capacitor of 0.1 $\mu\text{F}$ is recommended as close as possible to this pin.		

Table 3. ABSOLUTE MAXIMUM RATINGS (Note 1)

Rating	Symbol	Value	Unit
Supply Voltage Range of Headset Detection Circuit	V <sub>DD</sub>	0 to 2.75	V
Supply Voltage Range of S/E Detection Comparator	V <sub>DD2</sub>	0 to 2.95	V
Input Pin Voltage Range (L_DET, GND_DET)	V <sub>IN</sub>	-0.1 to V <sub>DD</sub> + 0.1	V
Input Pin Voltage Range (S/E_REF, S/E_DET) (Note 4)	V <sub>IN</sub>	-0.1 to min(V <sub>DD2</sub> + 0.6, 3.3)	V
MIC Output Pin Voltage Range	V <sub>MIC</sub>	0 to 6.0	V
Max Current on MIC Pin	I <sub>MIC</sub>	2	mA
Maximum Junction Temperature	T <sub>J(max)</sub>	+125	°C
Storage Temperature Range	T <sub>stg</sub>	-65 to +150	°C
Latch-up Current (Note 2)	I <sub>LU</sub>	800	mA
Moisture Sensitivity Level (Note 3)	MSL	Level 1	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. Refer to ELECTRICAL CHĂRACTERISTICS and APPLICATION INFORMATION for Safe Operating Area.

- Latch-up Current tested per JEDEC standard: JESD78
   Moisture Sensitivity Level tested per IPC/JEDEC standard: J-STD-020A
   The maximum voltage on the S/E\_REF and S/E\_DET pins must be the lesser of V<sub>DD2</sub> + 0.6 and 3.3 V.

**Table 4. RECOMMENDED OPERATING RANGES** 

Rating	Conditions	Symbol	Min	Тур	Max	Unit
Power Supply Voltage	Headset Detection Circuit	$V_{DD}$	1.6	1.8	2.5	V
	S/E Detection Comparator	$V_{DD2}$	1.6		2.8	V
Input Voltage	L_DET, GND_DET	V <sub>IN</sub>	0		$V_{DD}$	V
	S/E_DET, S/E_REF		0		$V_{DD2}$	V
Input Transition Rise or Fall Rate	GND_DET pin	Δt / ΔV	0		10	ns/V
MIC Bias Voltage		V <sub>MIC</sub>	0		2.95	V
Ambient Temperature		T <sub>A</sub>	-40		85	°C
Junction Temperature		$T_J$	-40		125	°C

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

Table 5. ELECTRICAL CHARACTERISTICSTypical values are referenced to  $T_A = 25^{\circ}C$ ,  $V_{DD} = 1.8$  V,  $V_{DD2} = 2.1$  V, unless

Parameter	Test Conditions	Symbol	Min	Тур	Max	Units
SUPPLY CHARACTERISTICS		•			•	
Quiescent Supply Current	Headset Detection Circuit, V <sub>GND_DET</sub> = 1.8 V, V <sub>L_DET</sub> = 1.8 V	I <sub>DD</sub>		7	8.5	μΑ
	S/E Detection Comparator, V <sub>SE_REF</sub> = 0 V, V <sub>SE_DET</sub> = 2.1 V	I <sub>DD2</sub>		10	12.5	μΑ
INPUT CHARACTERISTICS OF L_DE	Г					
Voltage Input Low		$V_{IL}$			1.33	V
Voltage Input High		$V_{IH}$	1.5			V
Propagation Delay to DET	C <sub>out</sub> = 15 pF, GND_DET = 0 V, L_DET = 1.31 V to 1.52 V	t <sub>pLH</sub> , t <sub>pHL</sub>		45		ns
Low to High Propagation Delay to MIC	$C_{out} = 15 \text{ pF}, \text{ GND\_DET} = 0 \text{ V}, \\ L\_DET = 1.31 \text{ V to } 1.52 \text{ V}, \\ R_{PU} = 2.2 \text{ k}\Omega, \text{ MIC bias} = 2.3 \text{ V}$	t <sub>pLH</sub>		230		ns
High to Low Propagation Delay to MIC	$C_{out} = 15 \text{ pF}, \text{ GND\_DET} = 0 \text{ V}, \\ L\_DET = 1.31 \text{ V to } 1.52 \text{ V}, \\ R_{PU} = 2.2 \text{ k}\Omega, \text{ MIC bias} = 2.3 \text{ V}$	t <sub>pHL</sub>		30		ns
Low Voltage Input Bias Current	V <sub>L_DET</sub> = 0 V	I <sub>IL</sub>		1.8		μΑ
High Voltage Input Leakage	V <sub>L_DET</sub> = 1.8 V	I <sub>IH</sub>		2.4		nA
Input Capacitance	f = 1 MHz	C <sub>IN</sub>		3		pF
INPUT CHARACTERISTICS OF GND_	DET					
Voltage Input Low		$V_{IL}$			0.63	V
Voltage Input High		V <sub>IH</sub>	1.17			V
Low to High Propagation Delay to DET	$C_{out}$ = 15 pF, R <sub>L</sub> = 1 M $\Omega$ , L_detect = 0 V, GND_detect = 1.8 to 0 V	t <sub>pLH</sub>		30		ns
High to Low Propagation Delay to DET	$C_{out}$ = 15 pF, R <sub>L</sub> = 1 M $\Omega$ , L_detect = 0 V, GND_detect = 0 to 1.8 V	t <sub>pHL</sub>		16		ns
Low Voltage Input Bias Current	V <sub>GND_detect</sub> = 0 V	I <sub>IL</sub>		1.8		μΑ
High Voltage Input Leakage	V <sub>GND_detect</sub> = 1.8 V	I <sub>IH</sub>		2.7		nA
Input Capacitance	f = 1 MHz	C <sub>IN</sub>		3		pF

Refer to ABSOLUTE MAXIMUM RATINGS and APPLICATION INFORMATION for Safe Operating Area.
 Performance guaranteed over the indicated operating temperature range by design and/or characterization.

**Table 5. ELECTRICAL CHARACTERISTICS** Typical values are referenced to  $T_A = 25^{\circ}C$ ,  $V_{DD} = 1.8$  V,  $V_{DD2} = 2.1$  V, unless otherwise noted. Min/max values apply from  $T_A = -40^{\circ}C$  to  $85^{\circ}C$ , unless otherwise noted. (Notes 5, 6)

Parameter	Test Conditions	Symbol	Min	Тур	Max	Units	
OUTPUT CHARACTERISTICS OF DET							
Voltage Output Low	I <sub>OH</sub> = 0.1 mA	$V_{OL}$			0.1	V	
Voltage Output High	$I_{OH} = -0.1 \text{ mA}$	V <sub>OH</sub>	1.6			V	
Rise Time	$C_{OUT}$ = 15 pF, $R_L$ = 1 M $\Omega$	t <sub>rise</sub>		50		ns	
Fall Time	$C_{OUT}$ = 15 pF, $R_L$ = 1 M $\Omega$	t <sub>fall</sub>		28		ns	
INPUT CHARACTERISTICS OF S/E_R	INPUT CHARACTERISTICS OF S/E_REF AND S/E_DET						
Propagation Delay to S/E	$C_{out}$ = 15 pF, $V_{CM}$ = mid–supply, 100 mV overdrive	t <sub>pLH</sub> , t <sub>pHL</sub>		50		ns	
Input Leakage	V <sub>CM</sub> = 0.9 V	I <sub>I</sub> Γ		150		pА	
Input Capacitance	S/E_DET, f = 1 MHz	C <sub>IN</sub>		3		pF	
	S/E_REF, f = 1 MHz	1 1		11		1	
OUTPUT CHARACTERISTICS OF S/E							
Voltage Output Low	I <sub>OH</sub> = 0.1 mA	$V_{OL}$			0.1	V	
Voltage Output High	$I_{OH} = -0.1 \text{ mA}$	V <sub>OH</sub>	1.9			V	
Rise Time	$C_{OUT}$ = 15 pF, $R_L$ = 1 M $\Omega$	t <sub>rise</sub>		30		ns	
Fall Time	$C_{OUT}$ = 15 pF, $R_L$ = 1 M $\Omega$	t <sub>fall</sub>		18		ns	
CHARACTERISTICS OF MIC		·		-		-	
Drain-Source On Resistance of NMOS	I <sub>MIC</sub> = 1 mA	R <sub>DS(ON)</sub>		0.45	1.2	Ω	

<sup>5.</sup> Refer to ABSOLUTE MAXIMUM RATINGS and APPLICATION INFORMATION for Safe Operating Area.

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

# **TYPICAL CHARACTERISTICS**

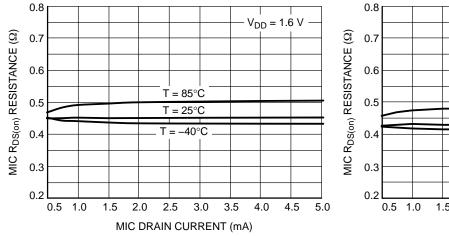


Figure 3. MIC On Resistance vs. Drain Current at  $V_{DD}$  = 1.6 V

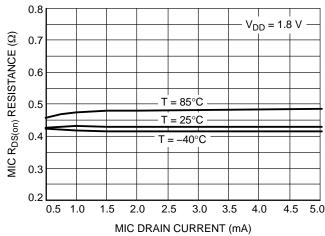


Figure 4. MIC On Resistance vs. Drain Current at V<sub>DD</sub> = 1.8 V

<sup>6.</sup> Performance guaranteed over the indicated operating temperature range by design and/or characterization.

#### **TYPICAL CHARACTERISTICS**

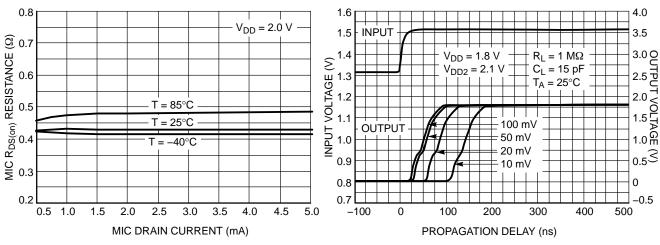


Figure 5. MIC On Resistance vs. Drain Current at  $V_{DD}$  = 2.0 V

Figure 6. Low to High Propagation to DET with Changing Input Overdrive of L\_DET

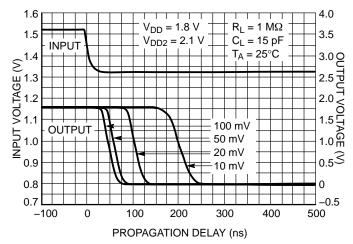


Figure 7. High to Low Propagation to DET with Changing Input Overdrive of L\_DET

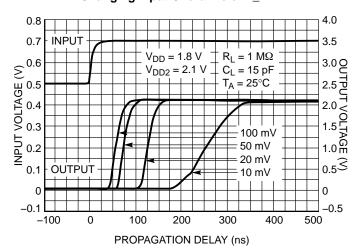


Figure 8. Low to High Propagation to SE with Changing Input Overdrive of SE\_DET

#### TYPICAL CHARACTERISTICS

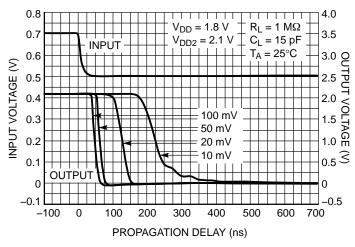


Figure 9. High to Low Propagation to SE with Changing Input Overdrive of SE\_DET

#### **APPLICATIONS INFORMATION**

#### **Supply Voltages**

The NCS2302 works with a wide range of supply voltages. The main headset detection circuitry power supply can range from  $V_{DD}=1.6~V$  to 2.5 V. The send/end button press detection circuit can be powered from  $V_{DD2}=1.6$  to 2.8 V.  $V_{DD}$  should be powered up before  $V_{DD2}$ . The send/end detection comparator will not be functional unless  $V_{DD}$  and  $V_{DD2}$  are both applied.  $V_{DD2}$  can be connected to  $V_{DD}$  or to a separate supply voltage, such as the MIC bias voltage. Decoupling capacitors of 0.1  $\mu F$  should be placed as close as possible to each power supply pin. Since the NCS2302 has built in latch—up immunity up to 800 mA, series resistors are not recommended on VDD or VDD2.

## **Audio Jack Detection**

The NCS2302 is designed to simplify the detection of a stereo audio connector with a microphone contact. When the headset is not connected, the internal pull-up resistors on L\_DET and GND\_DET pull those pins high. When the headset is connected to the switched audio jack, the headset ground and left audio channel trigger L\_DET and GND\_DET to logic low.

The NCS2302 can work with either the CTIA or OMTP standard. In order to support both standards simultaneously, a cross point switch and additional circuitry is necessary to detect and swap the ground and microphone pins.

#### Send/End Button Press Detection


A second integrated comparator allows the send/end signal to be compared with a reference voltage to detect whether the send/end button has been pressed.

#### **MIC Pin Biasing**

The typical application schematic in Figure 1 shows the recommended 2.2  $k\Omega$  pull–up resistor to the MIC bias voltage. The MIC bias voltage can exceed  $V_{DD}$  and can go as high as 2.95 V. When the headset is not detected, the internal NMOS transistor is enabled to mute the MIC signal. In the typical application scenario with a 2.2  $k\Omega$  pull–up to a 2.1 V MIC bias voltage, the MIC pin is pulled to 1 mV when the headset is not present. The internal NMOS transistor is optimized to sink up to 2 mA of current, allowing some flexibility in the selection of the pull–up resistor and MIC bias voltage.

# PACKAGE DIMENSIONS

#### UQFN10 1.4x1.8, 0.4P CASE 488AT **ISSUE A**

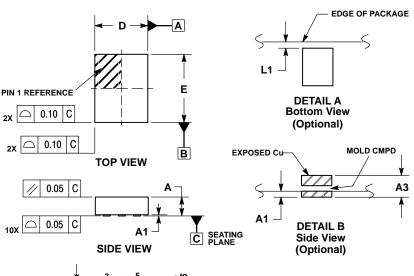

10 X

**BOTTOM VIEW** 

0.10 C A B

NOTE 3


0.05 С

#### NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  CONTROLLING DIMENSION: MILLIMETERS
- DIMENSION & APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.25 AND 0.30 MM
- FROM TERMINAL.
  COPLANARITY APPLIES TO THE EXPOSED PAD
  AS WELL AS THE TERMINALS.

	MILLIMETERS			
DIM	MIN	MAX		
Α	0.45	0.60		
A1	0.00	0.05		
A3	0.127	REF		
b	0.15	0.25		
D	1.40 BSC			
Е	1.80	BSC		
е	0.40	BSC		
L	0.30	0.50		
L1	0.00	0.15		
L3	0.40	0.60		

#### **MOUNTING FOOTPRINT**



ON Semiconductor and in are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all Claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

# **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA

Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free

Europe, Middle East and Africa Technical Support:

Phone: 421 33 790 2910

Japan Customer Focus Center

Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

# **ПОСТАВКА** ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

# Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

# http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

# Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru\_6 moschip.ru 4 moschip.ru 9