


# 10-ohm 0.5%, 1%, 2%, 5% tolerance thick film current sense resistor



## features

- Marking: 1H: no marking on black protective coating  
1E, 1J: No marking on indigo protective coating.  
2A~W3A: three or four digit marking on indigo protective coating.
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified: 0402 (1E), 0603 (1J), 0805 (2A), 1206 (2B), 1210 (2E), 2010 (2H/W2H), 2512 (3A/W3A)

## dimensions and construction

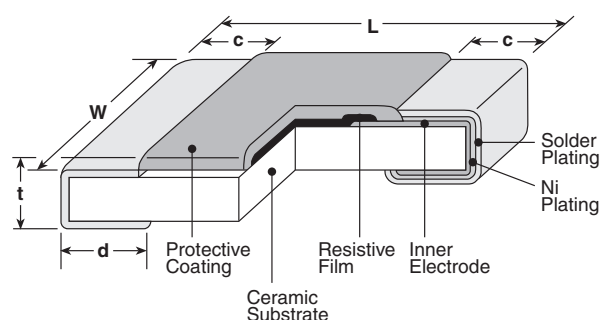

| Type<br>(Inch Size Code) | Dimensions inches (mm)                                                           |                                                                                   |                         |                                                                                  |                          |
|--------------------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------|----------------------------------------------------------------------------------|--------------------------|
|                          | L                                                                                | W                                                                                 | c                       | d                                                                                | t                        |
| <b>1H</b><br>(0201)      | .024±.001<br>(0.6±0.03)                                                          | .012±.001<br>(0.3±0.03)                                                           | .004±.002<br>(0.1±0.05) | .006±.002<br>(0.15±0.05)                                                         | .009±.001<br>(0.23±0.03) |
| <b>1E</b><br>(0402)      | .039 <sup>+.004</sup> <sub>-.002</sub><br>(1.0 <sup>+.01</sup> <sub>-.05</sub> ) | .02 <sup>+.004</sup> <sub>-.002</sub><br>(0.5 <sup>+.01</sup> <sub>-.05</sub> )   | .01±.004<br>(0.25±0.1)  | .01±.004<br>(0.25±0.1)                                                           | .014±.002<br>(0.35±0.05) |
| <b>1J</b><br>(0603)      | .063±.008<br>(1.6±0.2)                                                           | .031 <sup>+.006</sup> <sub>-.004</sub><br>(0.8 <sup>+.015</sup> <sub>-.01</sub> ) | .014±.004<br>(0.35±0.1) | .014±.004<br>(0.35±0.1)                                                          | .018±.004<br>(0.45±0.1)  |
| <b>2A</b><br>(0805)      | .079±.008<br>(2.0±0.2)                                                           | .049±.004<br>(1.25±0.1)                                                           | .016±.008<br>(0.4±0.2)  | .012 <sup>+.008</sup> <sub>-.004</sub><br>(0.3 <sup>+.02</sup> <sub>-.01</sub> ) | .02±.004<br>(0.5±0.1)    |
| <b>2B</b><br>(1206)      | .126±.008<br>(3.2±0.2)                                                           | .063±.008<br>(1.6±0.2)                                                            | .02±.012<br>(0.5±0.3)   | .016 <sup>+.008</sup> <sub>-.004</sub><br>(0.4 <sup>+.02</sup> <sub>-.01</sub> ) | .024±.004<br>(0.6±0.1)   |
| <b>2E</b><br>(1210)      |                                                                                  | .102±.008<br>(2.6±0.2)                                                            |                         |                                                                                  |                          |
| <b>2H</b><br>(2010)      |                                                                                  | .098±.008<br>(2.5±0.2)                                                            |                         |                                                                                  |                          |
| <b>W2H</b><br>(2010)     | .197±.008<br>(5.0±0.2)                                                           | .098±.008<br>(2.5±0.2)                                                            | .02±.012<br>(0.5±0.3)   | .026±.006<br>(0.65±0.15)                                                         | .024±.004<br>(0.6±0.1)   |
| <b>3A</b><br>(2512)      | .248±.008<br>(6.3±0.2)                                                           | .122±.008<br>(3.1±0.2)                                                            |                         | .016 <sup>+.008</sup> <sub>-.004</sub><br>(0.4 <sup>+.02</sup> <sub>-.01</sub> ) |                          |
| <b>W3A</b><br>(2512)     |                                                                                  |                                                                                   |                         | .026±.006<br>(0.65±0.15)                                                         |                          |

## ordering information

| New Part # | SR73 | 2B                                                         | T                                                                                                             | TD                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 1R00                                                                                                                                                                                                                                                                                                    | F                                      |
|------------|------|------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| Type       |      | Size                                                       | Termination Material                                                                                          | Packaging                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Nominal Resistance                                                                                                                                                                                                                                                                                      | Tolerance                              |
|            |      | 1H<br>1E<br>1J<br>2A<br>2B<br>2E<br>W2H<br>W3A<br>2H<br>3A | T: Sn<br>L: SnPb (1E,<br>1J, 2A, 2B, 2E,<br>2H, 3A)<br>G: Au (1J, 2A,<br>2B: 0.1Ω - 10Ω -<br>contact factory) | TCM: 0201 only:<br>7" 2mm pitch pressed paper<br>TPL: 0402 only: 2mm pitch punch paper<br>TP: 0402, 0603, 0805: 7" 2mm pitch<br>punch paper<br>TD: 0603, 0805, 1206, 1210:<br>7" 4mm pitch punched paper<br>TDD: 0603, 0805, 1206, 1210:<br>10" paper tape<br>TE: 0805, 1206, 1210, 2010 & 2512:<br>7" embossed plastic<br>TED: 0805, 1206, 1210, 2010 & 2512:<br>10" embossed plastic<br>For further information on packaging,<br>please refer to Appendix A | ±2%, ±5%: 2 significant figures<br>+ 1 multiplier "R" indicates<br>decimal on value <10Ω<br>±1%: 3 significant figures<br>+ 1 multiplier "R" indicates<br>decimal on value <100Ω<br>All values less than 0.1Ω<br>(100mΩ) are expressed in<br>mΩ with "L" as decimal<br>Example: 20mΩ = 20L<br>(3-digit) | D: ±0.5%<br>F: ±1%<br>G: ±2%<br>J: ±5% |

## applications and ratings

| Part Designation*              | Power Rating @ 70°C           | T.C.R. (ppm/°C) Max. | Resistance Range    |                   |              |                 | Absolute Maximum Working Voltage | Maximum Overload Voltage (5 Secs. Max.) | Rated Terminal Part Temp. | Operating Temp. Range |  |  |
|--------------------------------|-------------------------------|----------------------|---------------------|-------------------|--------------|-----------------|----------------------------------|-----------------------------------------|---------------------------|-----------------------|--|--|
|                                |                               |                      | E-24, E-96 (D±0.5%) | E-24, E-96 (F±1%) | E-24 (G±2%)  | E-24 (J±5%)     |                                  |                                         |                           |                       |  |  |
| SR731H (0201)                  | 0.1W                          | 0 - ±500             | —                   | —                 | —            | 0.18Ω - 0.24Ω   | 1.0V                             | 2.5V                                    | —                         | -55°C to +125°C       |  |  |
|                                |                               | 0 - ±400             |                     | 1Ω - 10Ω**        |              | 0.27Ω - 10Ω     |                                  |                                         |                           |                       |  |  |
| SR731E (0402)                  | 1/8W (.125W)<br>1/6W (.166W') | ±200                 | —                   | 0.51Ω - 10Ω**     | 0.51Ω - 10Ω  | 0.51Ω - 10Ω     | 1.11V                            | 2.79V                                   | 125°C                     | -55°C to +150°C       |  |  |
|                                |                               | ±250                 | —                   | 0.2Ω - 0.47Ω**    | 0.2Ω - 0.47Ω | 0.2Ω - 0.47Ω    |                                  |                                         |                           |                       |  |  |
|                                |                               | ±300                 | —                   | 0.1Ω - 0.18Ω**    | 0.1Ω - 0.18Ω | 0.1Ω - 0.18Ω    |                                  |                                         |                           |                       |  |  |
| SR731J (0603)                  | 1/5W (.2W)                    | ±200                 | —                   | 0.1Ω - 10Ω        | 0.1Ω - 10Ω   | 0.1Ω - 10Ω      | 1.41V                            | 3.53V                                   |                           |                       |  |  |
| SR732A (0805)                  | 1/4W (.25W)<br>1/3W (.33W')   | ±100                 | 0.15Ω - 10Ω         | 0.1Ω - 10Ω        | —            | —               | 1.58V                            | 3.95V                                   |                           |                       |  |  |
|                                |                               | ±200                 | —                   | —                 | 0.1Ω - 10Ω   | 0.1Ω - 10Ω      |                                  |                                         |                           |                       |  |  |
|                                |                               | ±500                 | —                   | —                 | —            | 0.051Ω - 0.091Ω |                                  |                                         |                           |                       |  |  |
|                                |                               | ±800                 | —                   | —                 | —            | 0.030Ω - 0.047Ω |                                  |                                         |                           |                       |  |  |
| SR732B (1206)                  | 1/3W (.33W)<br>1/2W (.5W')    | ±100                 | 0.15Ω - 10Ω         | 0.1Ω - 10Ω        | —            | —               | 1.81V                            | 4.54V                                   |                           |                       |  |  |
|                                |                               | ±200                 | —                   | —                 | 0.1Ω - 10Ω   | 0.1Ω - 10Ω      |                                  |                                         |                           |                       |  |  |
|                                |                               | ±500                 | —                   | —                 | —            | 0.056Ω - 0.091Ω |                                  |                                         |                           |                       |  |  |
|                                |                               | ±800                 | —                   | —                 | —            | 0.030Ω - 0.051Ω |                                  |                                         |                           |                       |  |  |
| SR732E (1210)                  | 1/2W (.5W)<br>2/3W (.66W')    | ±100                 | —                   | 0.1Ω - 10Ω        | —            | —               | 2.23V                            | 5.59V                                   |                           |                       |  |  |
|                                |                               | ±200                 | —                   | —                 | 0.1Ω - 10Ω   | 0.047Ω - 10Ω    |                                  |                                         |                           |                       |  |  |
|                                |                               | ±500                 | —                   | —                 | —            | 0.036Ω - 0.043Ω |                                  |                                         |                           |                       |  |  |
|                                |                               | ±1000                | —                   | —                 | —            | 0.024Ω - 0.033Ω |                                  |                                         |                           |                       |  |  |
| SR732H/W2H <sup>2</sup> (2010) | 3/4W (.75W)                   | ±100                 | —                   | 0.1Ω - 10Ω        | —            | —               | 2.73V                            | 6.84V                                   |                           |                       |  |  |
|                                |                               | ±200                 | —                   | —                 | 0.1Ω - 10Ω   | 0.1Ω - 10Ω      |                                  |                                         |                           |                       |  |  |
|                                |                               | ±500                 | —                   | —                 | —            | 0.056Ω - 0.091Ω |                                  |                                         |                           |                       |  |  |
|                                |                               | ±800                 | —                   | —                 | —            | 0.033Ω - 0.051Ω |                                  |                                         |                           |                       |  |  |
| SR733A/W3A (2512)              | 1W                            | ±100                 | —                   | 0.1Ω - 10Ω        | —            | —               | 3.16V                            | 7.90V                                   |                           |                       |  |  |
|                                |                               | ±200                 | —                   | —                 | 0.1Ω - 10Ω   | 0.1Ω - 10Ω      |                                  |                                         |                           |                       |  |  |
|                                |                               | ±500                 | —                   | —                 | —            | 0.056Ω - 0.091Ω |                                  |                                         |                           |                       |  |  |
|                                |                               | ±800                 | —                   | —                 | —            | 0.039Ω - 0.051Ω |                                  |                                         |                           |                       |  |  |

\* Parentheses indicate EIA package size codes.

\*\* 1H, 1E (F: ±1%) E-24 values only.

<sup>1</sup> Please refer to the "Higher Power Ratings" statement in the beginning of the catalog. Contact KOA prior to usage.


<sup>2</sup> SR73W3AS (2010 size, 1 Watt) with limited Resistance Range - contact factory for details.

Rated ambient temperature: +70°C


Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

## environmental applications

### Derating Curve

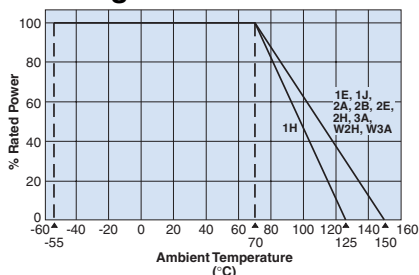

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

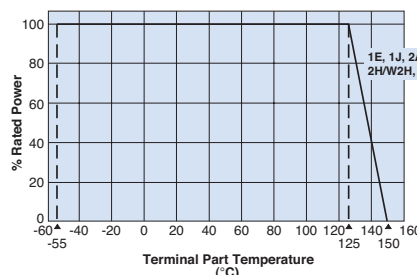

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" on the beginning of our catalog before use.

## Performance Characteristics

| Parameter                   | Requirement $\Delta R \pm (\% + 0.005\Omega)$ |                             | Test Method                                                                    |
|-----------------------------|-----------------------------------------------|-----------------------------|--------------------------------------------------------------------------------|
|                             | Limit                                         | Typical                     |                                                                                |
| Resistance                  | Within specified tolerance                    | —                           | 25°C                                                                           |
| T.C.R.                      | Within specified T.C.R.                       | —                           | +25°C/-55°C and +25°C/+125°C                                                   |
| Overload (Short time)       | ±2%                                           | ±0.5%                       | Rated voltage x 2.5 for 5 seconds                                              |
| Resistance to Solder Heat   | 1H: ±3%,<br>1E~W3A: ±1%                       | 1H: ±0.75%<br>1E~W3A: ±0.3% | 260°C ± 5°C, 10 seconds ± 1 second                                             |
| Rapid Change of Temperature | ±1%                                           | ±0.3%                       | -40°C (30 minutes), +125°C (30 minutes), 100 cycles                            |
| Moisture Resistance         | 1H: ±3%<br>1E~W3A: ±2%                        | ±1%                         | 40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle                |
| Endurance at 70°C           | 1H: ±3%<br>1E~W3A: ±2%                        | ±1%                         | 70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle                            |
| High Temperature Exposure   | ±1%                                           | ±0.3%                       | 1H: +125°C, 1000 hours; 1E, 1J, 2A, 2B, 2E, 2H/W2H, 3A/W3A: +150°C, 1000 hours |

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/05/14

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9