Detailed Specifications & Technical Data

ENGLISH MEASUREMENT VERSION



1634A Multi-Conductor - Type 1




For more Information please call

1-800-Belden1



General Description:

IBM Type 1, 22 AWG solid BC conductors, non-plenum, flame-retardant foam polyethylene insulation, each pair individually Beldfoil® shielded, overall TC braid shield (65% coverage), rip cord, pvc jacket.

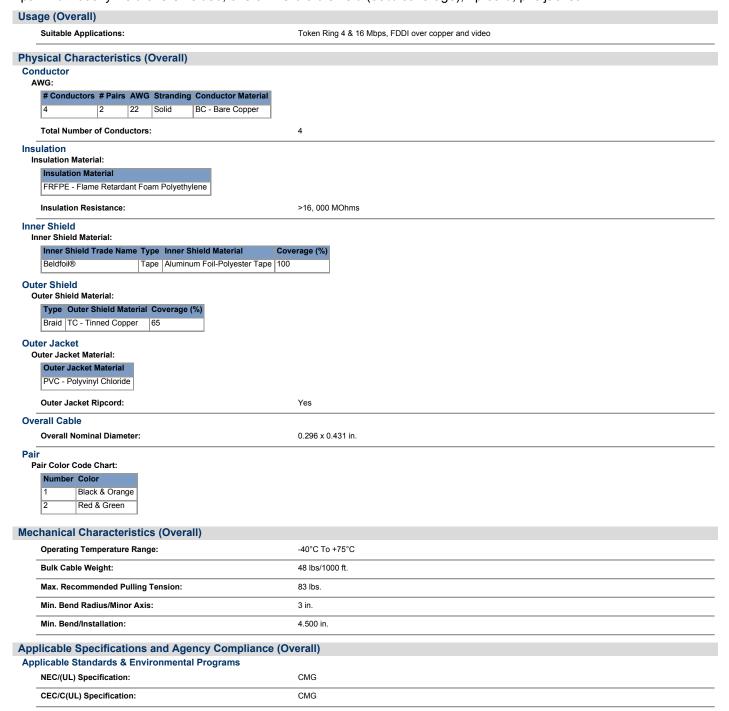

Page 1 of 3 09-11-2017

Detailed Specifications & Technical Data

ENGLISH MEASUREMENT VERSION



1634A Multi-Conductor - Type 1

EU	Directive 2011/65/EU (ROHS II):	Yes		
IEE	E Specification:	IEEE802.5 Token Ring		
EU	CE Mark:	Yes		
EU	Directive 2000/53/EC (ELV):	Yes		
EU	Directive 2002/95/EC (RoHS):	Yes		
EU	RoHS Compliance Date (mm/dd/yyyy):	01/01/2004		
EU	Directive 2002/96/EC (WEEE):	Yes		
EU	Directive 2003/11/EC (BFR):	Yes		
CA	Prop 65 (CJ for Wire & Cable):	Yes		
MII	Order #39 (China RoHS):	Yes		
Oth	ner Specification:	Verified IBM Type 1		
Cus	stomer Part Number Reference Specification:	IBM P/N: 4716748		
Flame 1	Test			
UL	Flame Test:	UL1685 FT4 Loading		
CSA	A Flame Test:	FT4		
Plenum	n/Non-Plenum			
Plei	num (Y/N):	No		

Surface Printing:

BELDEN 1634A CMG 75C 2PR22 SHIELDED (UL) E108998 C(UL)----ETL VERIFIED TO IBM SPECIFICATION 4716748

150

Electrical Characteristics (Overall)

Nom. Characteristic Impedance:

Impedance (Ohm) 150

Nom. Capacitance Conductor to Conductor:

Capacitance (pF/ft)

Maximum Capacitance Unbalance (pF/100 m):

Nominal Velocity of Propagation:

Nom. Conductor DC Resistance:

DCR @ 20°C (Ohm/1000 ft)

Nominal Outer Shield DC Resistance:

DCR @ 20°C (Ohm/1000 ft) 2.3

Max. Attenuation:

Freq. (MHz) Attenuation (dB/100 m) 2.2 16

Max. Operating Voltage - UL:

Voltage 300 V RMS

Max. Recommended Current:

2.3 Amps per conductor @ 25°C

Electrical Characteristics-Premise (Overall)

Premise

Minimum NEXT:

Freq. (MHz)	NEXT (dB)
4	58
16	40

Notes (Overall)

Notes: IBM gusalified Type 1 media cable for use in IBM cabling systems. For suffix "A" product see 9688

Page 2 of 3

Detailed Specifications & Technical Data

ENGLISH MEASUREMENT VERSION



1634A Multi-Conductor - Type 1

Put Ups and Colors:

Item #	Putup	Ship Weight	Color	Notes	Item Desc
1634A 0101000	1,000 FT	50.000 LB	BLACK	CZ	IBM TYPE1 STP CMG REEL

Notes:

C = CRATE REEL PUT-UP

Z = FINAL PUT-UP LENGTH MAY VARY (+ OR -) 10% FOR SPOOLS OR REELS AND(+ OR -) 5% FOR UNREEL CARTONS FROM LENGTH SHOWN.

Revision Number: 2 Revision Date: 01-18-2013

© 2017 Belden, Inc All Rights Reserved

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Belden products are subject to Belden's standard terms and conditions of sale.

Belden believes this product to be in compliance with EU ROHS (Directive 2002/95/EC, 27-Jan-2003). Material manufactured prior to the compliance date may be in stock at Belden facilities and in our Distributor's inventory. The information provided in this Product Disclosure, is correct to the best of Belden's knowledge, information, and belief at the date of its publication. The information provided in this Product Disclosure is designed only as a general guide for the safe handling, storage, and any other operation of the product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product. Belden declares this product to be in compliance with EU LVD (Low Voltage Directive 2014/35/EU).

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9