

Vectron International

Filter specification

TFS433AK

1/5

Measurement condition

| | | |
|-----------------------------|----|----------|
| Ambient temperature T_A : | 23 | °C |
| Input power level: | 0 | dBm |
| Terminating impedance: | | |
| Input: | 50 | Ω |
| Output: | 50 | Ω |

Characteristics

Remark:

The reference level for the relative attenuation a_{rel} of the TFS433AK is the minimum of the pass band attenuation. This value is defined as the insertion loss a_e . The nominal frequency f_N is fixed at 433.92 MHz without any tolerance. The values of relative attenuation a_{rel} are guaranteed over the whole operating temperature range. The frequency shift of the filter within the operating temperature range is included in the production tolerance scheme.

| D a t a | typ. value | | tolerance / limit | |
|---|-------------------|------------|--------------------------|----------|
| Insertion loss | a_e | 2.75 dB | 3.80 dB | |
| (reference level) | | - | - | |
| Nominal frequency | f_N | - | 433.92 MHz | |
| Centre frequency | f_C | 433.96 MHz | - | |
| Passband | PB | | | |
| 1 dB | | 6.4 MHz | min. | 1.71 MHz |
| Relative attenuation | a_{rel} | | | |
| $f_N - 0.92$ MHz ... $f_N + 0.79$ MHz | | 0.4 dB | max. | 1 dB |
| $f_N - 8.42$ MHz ... $f_N - 18.92$ MHz | | 58 dB | min. | 37 dB |
| $f_N - 18.92$ MHz ... $f_N - 25.92$ MHz | | 63 dB | min. | 52 dB |
| $f_N - 25.92$ MHz ... $f_N - 40.92$ MHz | | 65 dB | min. | 42 dB |
| $f_N - 40.92$ MHz ... $f_N - 83.92$ MHz | | 74 dB | min. | 52 dB |
| $f_N - 83.92$ MHz ... $f_N - 423.92$ MHz | | 71 dB | min. | 37 dB |
| $f_N + 9.58$ MHz ... $f_N + 20.08$ MHz | | 26 dB | min. | 12 dB |
| $f_N + 20.08$ MHz ... $f_N + 41.08$ MHz | | 55 dB | min. | 34 dB |
| $f_N + 41.08$ MHz ... $f_N + 141.08$ MHz | | 68 dB | min. | 50 dB |
| $f_N + 141.08$ MHz ... $f_N + 566.08$ MHz | | 50 dB | min. | 40 dB |
| Input power level | | - | max. | 5 dBm |
| Operating temperature range | OTR | - | - 40 °C ... + 85 °C | |
| Storage temperature range | | - | - 55 °C ... + 125 °C | |
| Temperature coefficient of frequency | TC_f *) | -35 ppm/K | - | |

*) $\Delta f = TC_f(T - T_A)f_N$



Generated:

Checked / Approved:

Vectron International GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@vectron.com


Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Filter characteristic

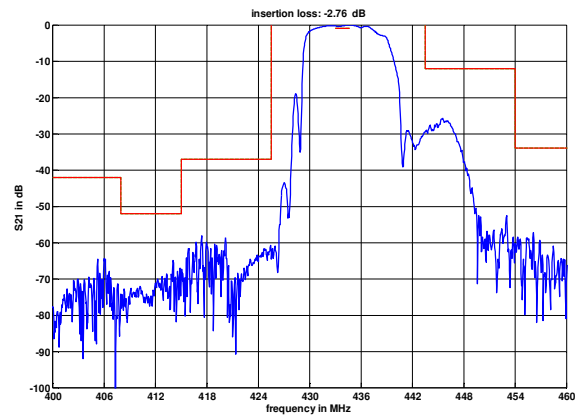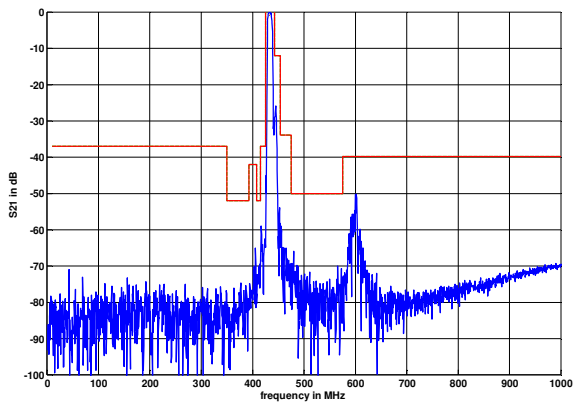

Construction and pin connection


(All dimensions in mm)

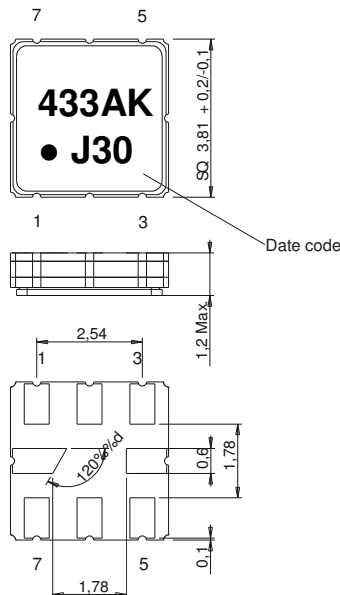

- 1 Ground
- 2 Output
- 3 Ground
- 4 Ground
- 5 Ground
- 6 Input
- 7 Ground
- 8 Ground

Date code: Year + week
 J 2017
 K 2018
 L 2019
 ...

50 Ohm Test circuit

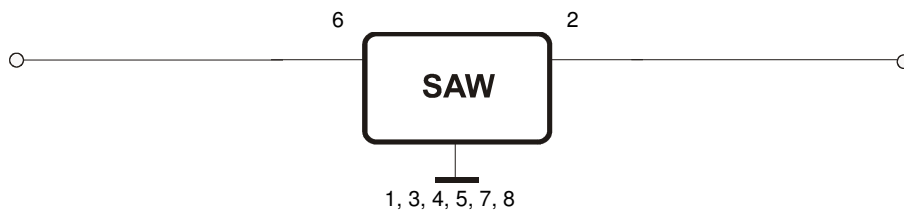

Vectron International GmbH
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@vectron.com

Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Stability characteristics, reliability

After the following tests the filter shall meet the whole specification:

1. Shock: 500 g, 1 ms, half sine wave, 3 shocks each plane;
DIN IEC 60068 T2 - 27
2. Vibration: 10 Hz to 2000 Hz, 0.35 mm or 5 g respectively, 1 octave per min, 10 cycles per plane, 3 planes; DIN IEC 60068 T2 - 6
3. Change of temperature: -55 °C to 125 °C / 15 min. each / 100 cycles
DIN IEC 60068 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: three times max.;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;
5. SAW devices are Electrostatic Discharge (ESD) sensitive devices.

This filter is RoHS compliant (2011/65/EU)


Packing

Tape & Reel: IEC 286 – 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;

| | |
|---|-------------|
| reel of empty components at start: | min. 300 mm |
| reel of empty components at start including leader: | min. 500 mm |
| trailer: | min. 300 mm |


Tape (all dimensions in mm)

- W : 12.00 ±0.3
- Po : 4.00 ±0.1
- Do : 1.50 +0.1/-0
- E : 1.75 ±0.1
- F : 5.50 ±0.05
- G(min) : 0.75
- P2 : 2.00 ±0.05
- P1 : 8.00 ±0.1
- D1(min) : 1.50
- Ao : 4.30 ±0.1
- Bo : 4.30 ±0.1
- Ct : 9.2 ±0.1
- Ko : 1.80 ±0.1
- t : 0.30 ±0.05

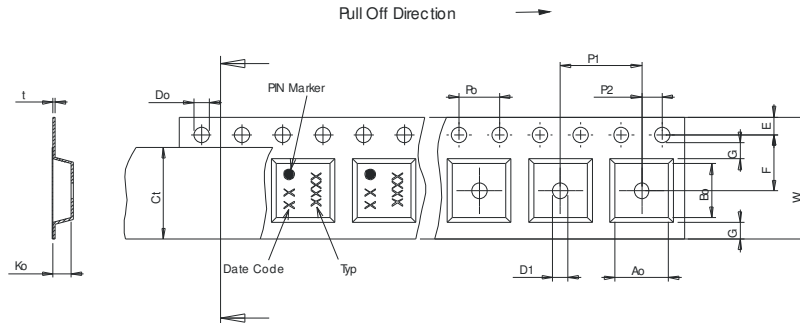

Reel (all dimensions in mm)

- A : 330 or 180
- W1 : 12.4 +2/-0
- W2(max) : 18.40
- N(min) : 50.00
- C : 13.0 +0.5/-0.2

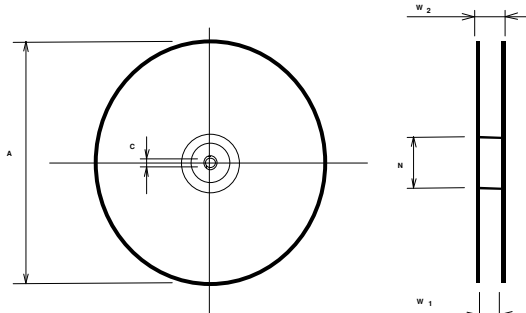

The minimum bending radius is 45 mm.


Vectron International GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@vectron.com

Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Air reflow temperature conditions

| Conditions | Exposure |
|---|-----------------------------|
| Average ramp-up rate (30 °C to 217 °C) | less than 3 °C / second |
| > 100 °C | between 300 and 600 seconds |
| > 150 °C | between 240 and 500 seconds |
| > 217 °C | between 30 and 150 seconds |
| Peak temperature | max. 260 °C |
| Time within 5 °C of actual peak temperature | between 10 and 30 seconds |
| Cool-down rate (Peak to 50 °C) | less than 6 °C / second |
| Time from 30 °C to Peak temperature | no greater than 300 seconds |

Chip-mount air reflow profile

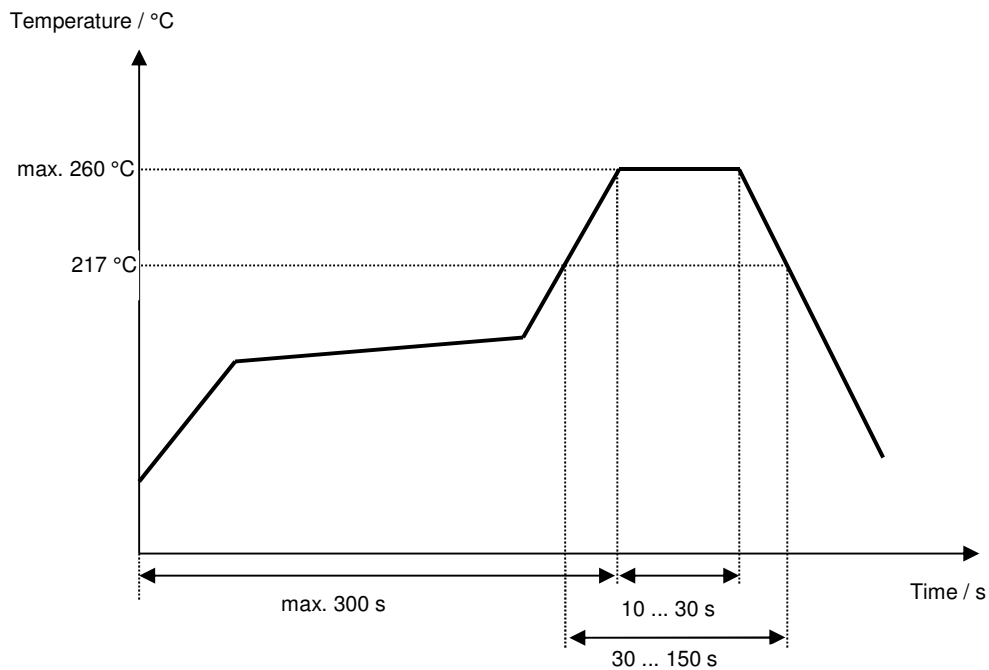

History

| Version | Reason of Changes | Name | Date |
|----------------|---|-------------|-------------|
| 1.0 | Generation of filter specification. | Abutaimah | 09.03.2017 |
| 1.1 | Update storage temperature range Update construction and pin connection Update 50 Ω test circuit Update tape & reel Update typos | P. Jaster | 27.07.2017 |

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9