

"High Frequency Ceramic Solutions"


868 and 915MHz dual (wideband) ISM band SMD chip antenna P/N 0900AT43A0070

Detail Specification: 3/19/2015

Page 1 of 7

General Specifications

Part Number	0900AT43A0070	
Frequency (MHz)	858 - 928	
Peak Gain (XZ-total)	-0.5 dBi typ.	
Average Gain (XZ-total)	-2.5 dBi typ.	
Radiated Efficiency	48% ave. ¹	
Return Loss	-4 dB min.	
impedance	50 Ω	
Reel Quantity	1,000	
Operating Temperature	-40 to +85°C	Recommended Storage Conditions of unused product on T&R
Storage Temperature	-40 to +85°C	
Power Capacity	2W max. (CW)	Storage Period
		+5 to +35°C, Humidity 45~75%RH
		18 months max.

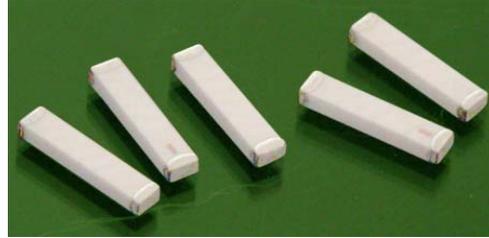


¹On test board 0900AT43A0070-EB2SMA, Layout# 2, page 5

Part Number Explanation

P/N Suffix	Packing Style	Bulk (loose)	Suffix = S	eg. 0900AT43A0070S
		T & R	Suffix = E	eg. 0900AT43A0070E
		100% Tin	Suffix = E or S	eg. 0900AT43A0070(E or S)

Mechanical Dimensions

	In	mm
L	0.276 ± 0.008	7.00 ± 0.20
W	0.079 ± 0.008	2.00 ± 0.20
T	0.031 ± +.004/-0.008	0.80 ± +0.1/-0.2
a	0.020 ± 0.012	0.50 ± 0.30

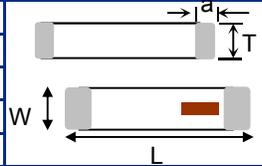


Terminal Configuration

No.	Function
1	RF Feed Point
2	To trace element

Layout Recommendation #1

Test board p/n: 0900AT43A0070-EB1SMA

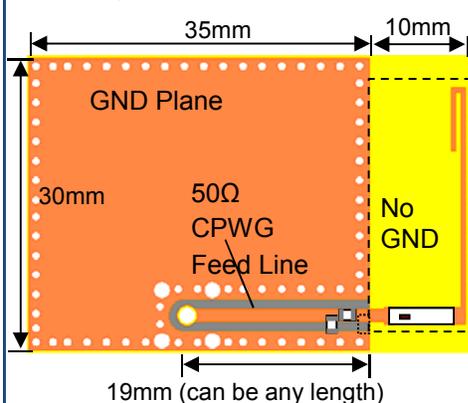

- Orderable EVB for evaluation, it comes with a female SMA connector. Go to: www.johansontechnology.com/component/samplerrequest and ask for p/n 0900AT43A0070-EB1SMA

- Need help laying out the antenna, want us to review your antenna design (free!), require the Gerber files for this EVB, or would like us to validate the new tuning values of your PCB (fee may apply) go to: www.johansontechnology.com/component/techquestion/

www.johansontechnology.com/ipcantennaservices

- The total antenna area usage for this EVB is approx. 25x10mm (due to trace element), but the trace can be re-shaped to reduce effective area and conform to the designer's PCB!



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.3

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


868 and 915MHz dual (wideband) ISM band SMD chip antenna P/N 0900AT43A0070

Detail Specification: 3/19/2015

Page 2 of 7

Recommended Application ISM

Layout Recommendation #1

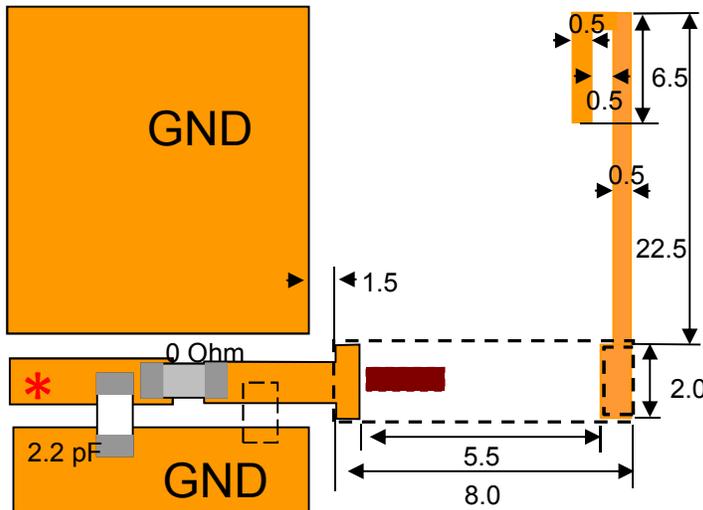


• Attention: Matching circuits and component values will be different on the client's design, depending on PCB layout, geometry, etc. It is recommended that the designer leave available slots for a "pi" (or shunt-series-shunt) network. The antenna matching network values you see here are used when antenna is mounted on Johanson's evaluation board.

• Need help laying out the antenna, want us to review your antenna design (free!), require the Gerber files for this EVB, or would like us to validate the new tuning values of your PCB (fee may apply) go to: www.johansontechnology.com/component/techquestion

* Line width should be designed to match 50ohm characteristic impedance, depending on your PCB material and thickness (distance to GND)

Typical Electrical Characteristics S11 return loss (T=25 °C) on Layout #1

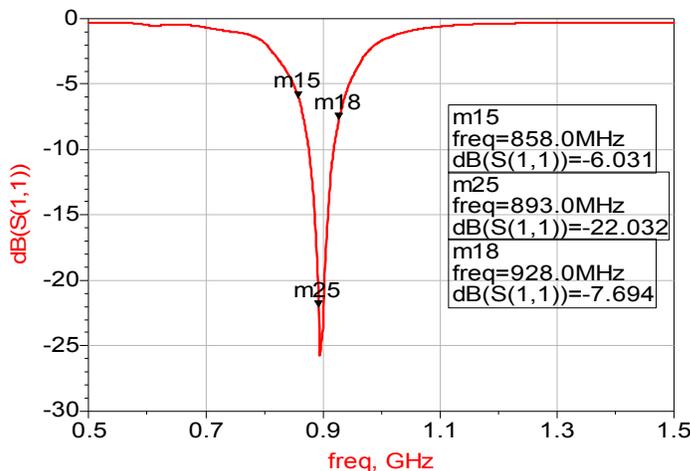

This antenna has about 20MHz of guard-band on each side

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.3


2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

868 and 915MHz dual (wideband) ISM band SMD chip antenna P/N 0900AT43A0070
 Detail Specification: 3/19/2015 Page 3 of 7

Recommended Application ISM

Typical Radiation Patterns (@25C) of Layout Recommendation #1

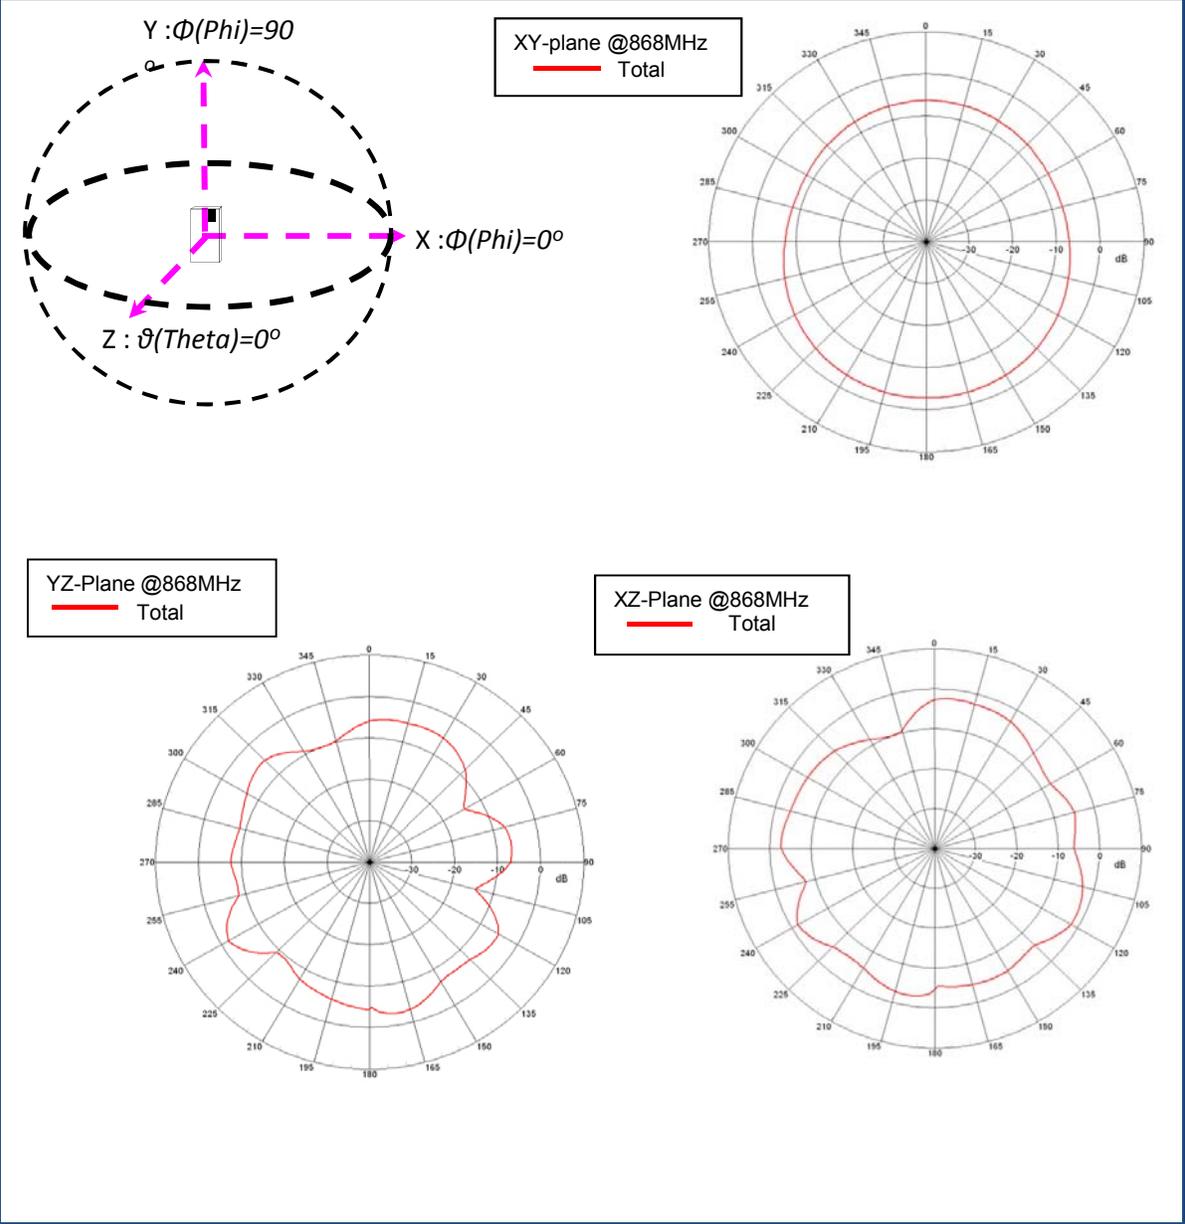

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
 4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
 Ver 1.3 2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


868 and 915MHz dual (wideband) ISM band SMD chip antenna P/N 0900AT43A0070

Detail Specification: 3/19/2015

Page 4 of 7

Recommended Application ISM

Typical Radiation Patterns (@25C) of Layout Recommendation #1

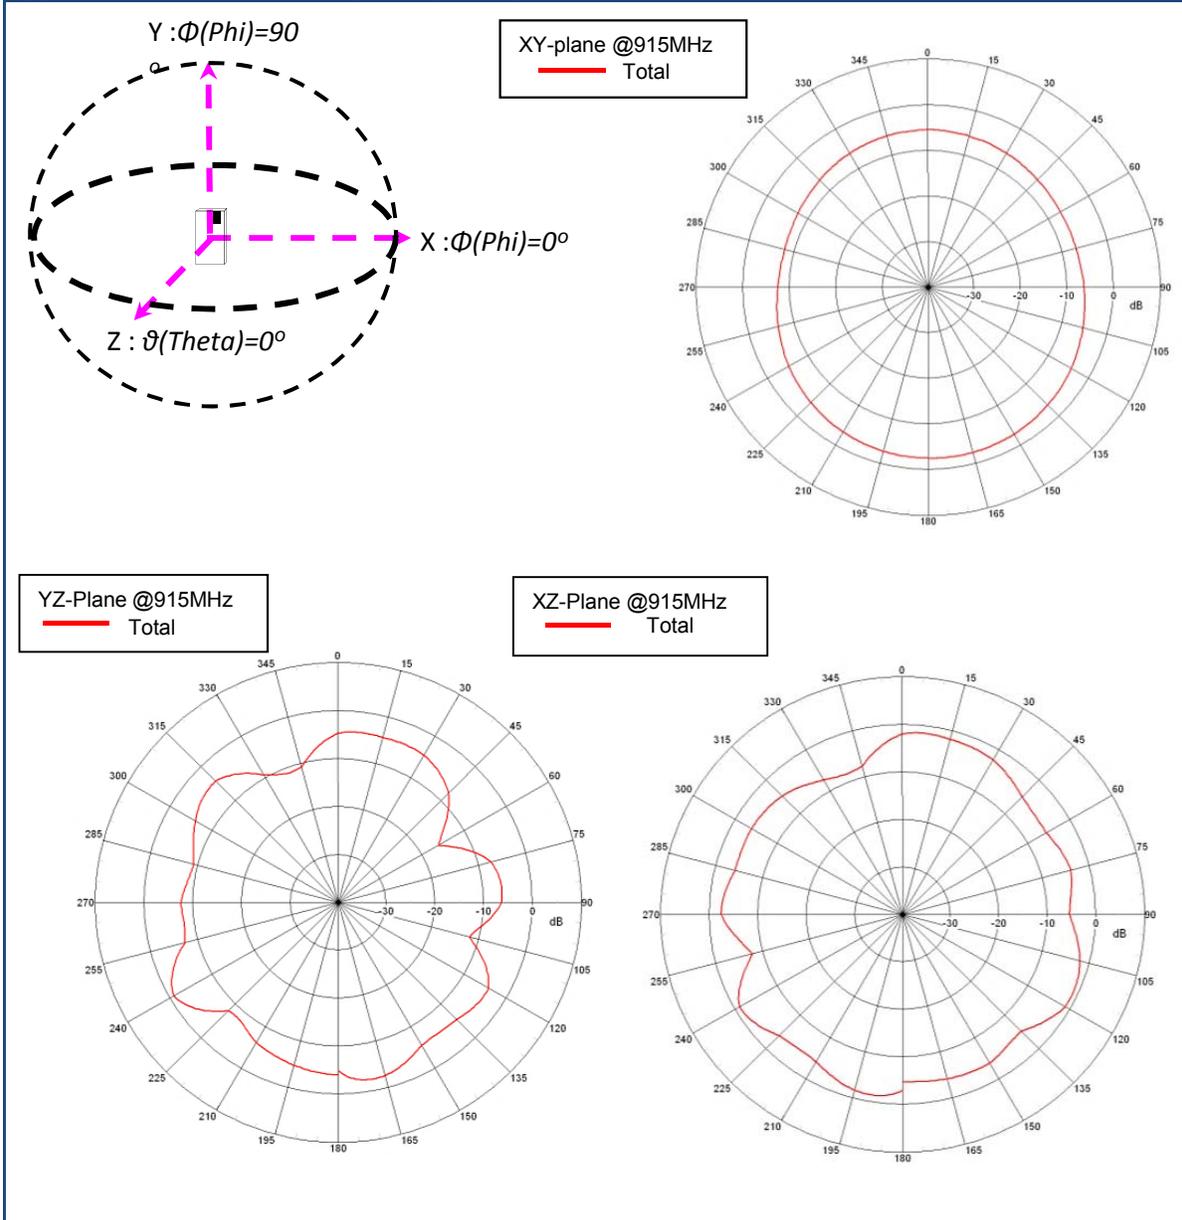

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.3

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

868 and 915MHz dual (wideband) ISM band SMD chip antenna P/N 0900AT43A0070


Detail Specification: 3/19/2015

Page 5 of 7

Recommended Application ISM

Layout Recommendation #2

Test board p/n: 0900AT43A0070-EB2SMA

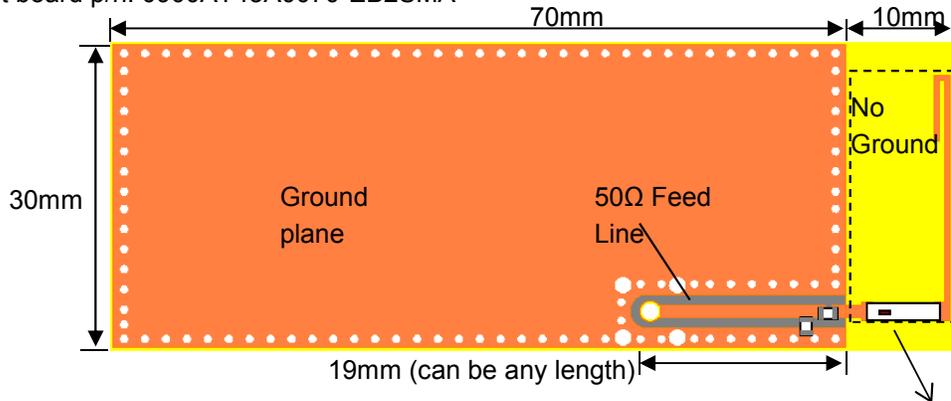


• Orderable EVB for evaluation, it comes with a female SMA connector. Go to: www.johansontechnology.com/component/samplerrequest and ask for p/n 0900AT43A0070-EB2SMA

• The total antenna area usage for this EVB is approx. 25x10mm (due to trace element), but the trace can be re-shaped to reduce effective area and conform to the designer's PCB!

• Need help laying out the antenna, want us to review the design (free!), require the Gerber files for this EVB, or would like us to validate the new tuning values of your PCB (fee may apply) go to: www.johansontechnology.com/component/techquestion/

www.johansontechnology.com/ipcantennaservices

* Line width should be designed to match 50ohm characteristic impedance, depending on your PCB material and thickness (dist to GND)

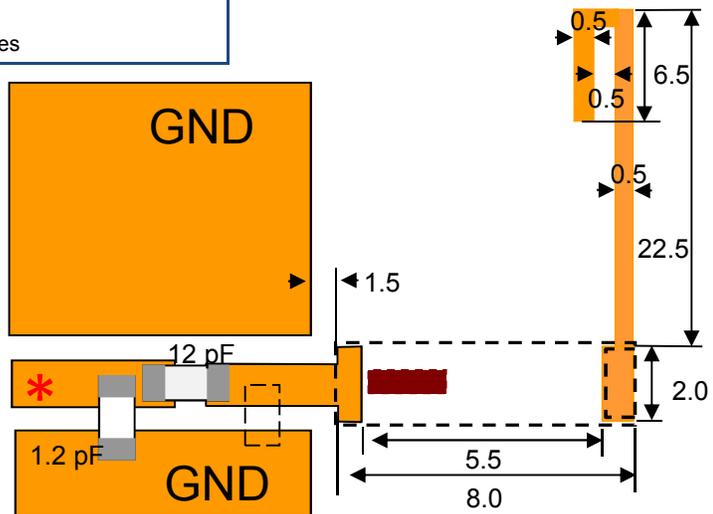

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.3

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


868 and 915MHz dual (wideband) ISM band SMD chip antenna P/N 0900AT43A0070

Detail Specification: 3/19/2015

Page 6 of 7


Recommended Application ISM

Typical Electrical Characteristics S11 return loss (T=25 °C) on Layout #2

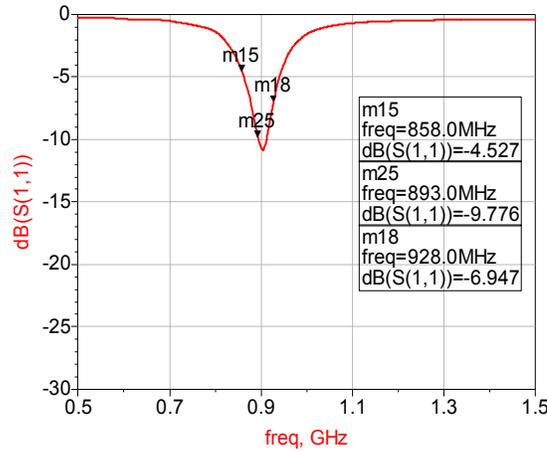

This antenna has about 20MHz of guard-band on each side

Typical Radiation Patterns (@25C) of Layout Recommendation #2

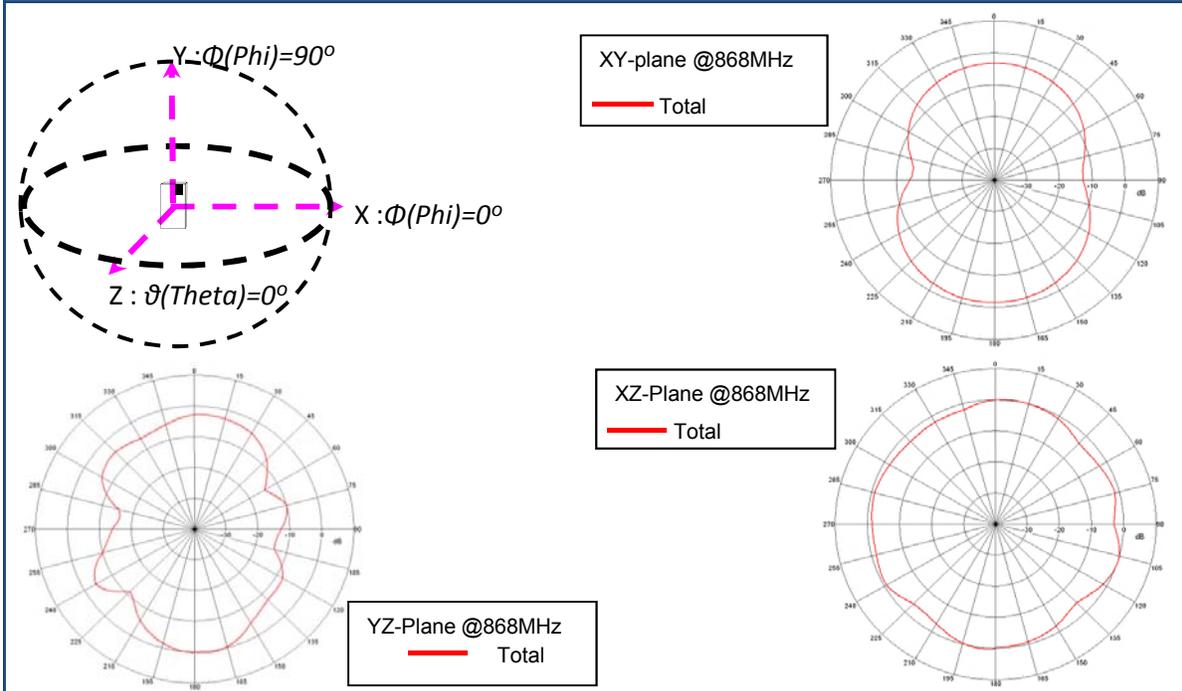

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.3

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


868 and 915MHz dual (wideband) ISM band SMD chip antenna P/N 0900AT43A0070

Detail Specification: 3/19/2015

Page 7 of 7

Recommended Application ISM

Typical Radiation Patterns (@25C) of Layout Recommendation #2

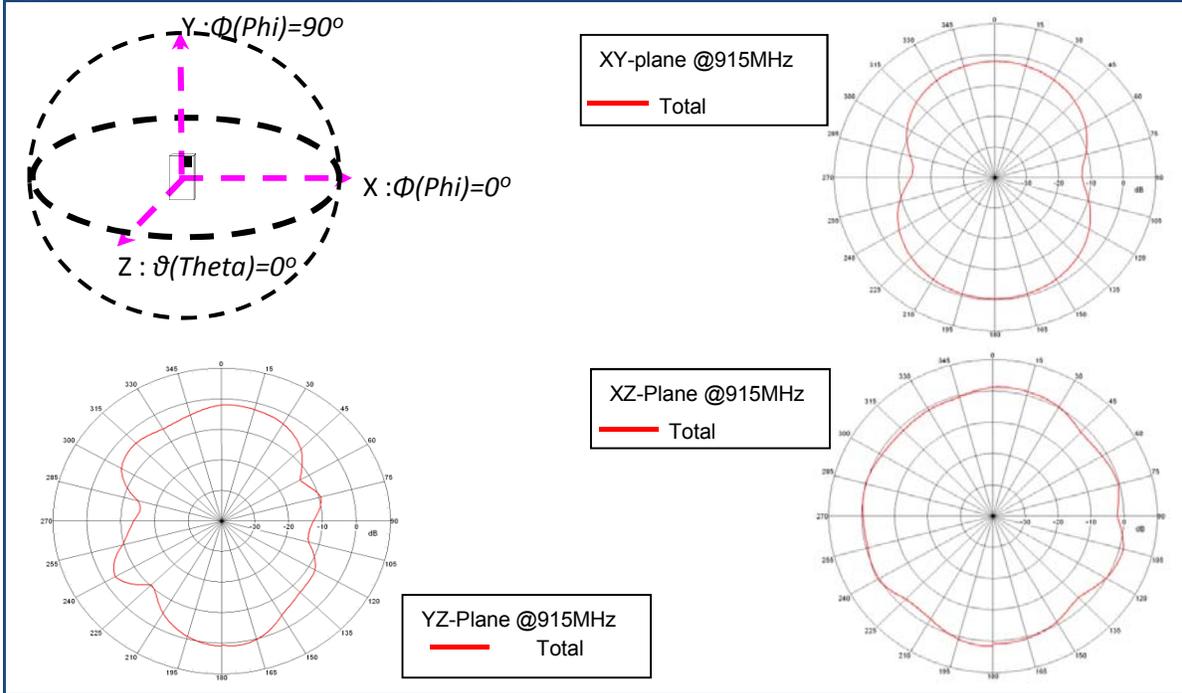


Alternative layout with reduced effective area

No EVB available for this layout

Total radiated efficiency will be reduced by about 10%

Do you have more questions about this layout?
 Contact our apps team at:

www.johansontechnology.com/component/techquestion

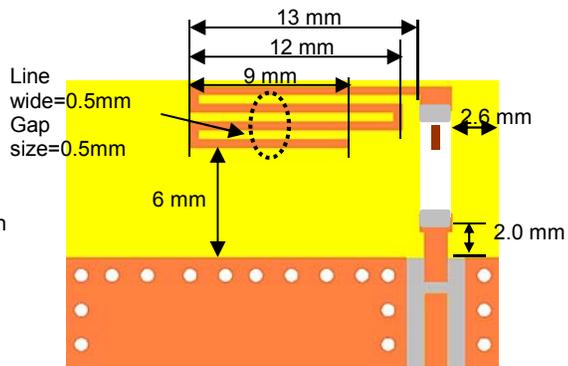

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.3

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

868 and 915MHz dual (wideband) ISM band SMD chip antenna P/N 0900AT43A0070

Detail Specification: 3/19/2015

Page 7 of 7

Recommended Application ISM

Antenna tuning, optimization, and validation services::

www.johansontechnology.com/ipcantennaservices

For layout review contact our Applications Team at:

www.johansontechnology.com/component/techquestion

Soldering Information

www.johansontechnology.com/ipcsoldering-profile

MSL Info

www.johansontechnology.com/technical-notes/msl-rating.html

Packaging information

www.johansontechnology.com/ipcpackaging.html

For more antennas and download measured S-parameters, go to:

www.johansontechnology.com/antennas

RoHS Compliance

www.johansontechnology.com/technical-notes/rohs-compliance.html

Recommended Storage Condition and Max Shelf Life

www.johansontechnology.com/ipcstorage-shelflife

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.3

2015 Johanson Technology, Inc. All Rights Reserved

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9