





LOC	DIST	REVISIONS					
		P	LTN	DESCRIPTION	DATE	DWN	APVD
GP	00	4		UPDATED VIEWS	30MAR2011	AL	CW
		5		REVISED PER ECO-12-003841	14MAR2012	TY	KS
		6		REVISED PER ECO-12-005533	05APR2012	JY	AC
		A		REVISED PER ECO-15-000148	10APR2015	RG	MC

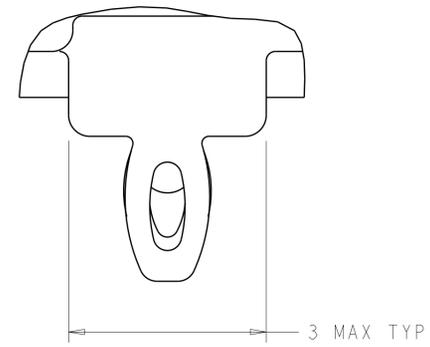

DETAIL S  
 SCALE 20:1

- 1. CAGE ASSEMBLY MATERIAL: NICKEL SILVER, 0.25 THICK  
 HEAT SINK MATERIAL: ALUMINUM  
 HEAT SINK CLIP MATERIAL: STAINLESS STEEL  
 EMI SPRING MATERIAL: COPPER ALLOY  
 FRONT FLANGE MATERIAL: ZINC ALLOY
- 2. PITCH BETWEEN PORTS OF ONE 1X6 CAGE ASSEMBLY.
- 3. SPACING BETWEEN CAGES ON THE SAME PC BOARD, TO BE SPECIFIED BY CUSTOMER, MUST COMPLY WITH MINIMUM DIMENSIONS SHOWN.
- 4. REFERENCE APPLICATION SPEC 114-13218 FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
- 5. DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6. DIMENSION F IS THE NOMINAL THICKNESS OF CUSTOMER SUPPLIED PC BOARD,  
 SINGLE SIDED PC BOARD MINIMUM THICKNESS = 1.45mm  
 DOUBLE SIDED PC BOARD MINIMUM THICKNESS = 2.2mm PER QSFP.
- 7. HEAT SINKS AND HEAT SINK CLIPS SHIPPED ASSEMBLED TO CAGE ASSEMBLY.  
 CAGE ASSEMBLY MAY BE PRESSED INTO THE PCB AS SHIPPED.
- 8. DATUM A IS TOP SURFACE OF PC BOARD.
- 9. DIMENSION APPLIES WITH MODULE INSERTED IN CAGE.
- 10. UNPLATED THRU HOLE.
- 11. MATES WITH QSFP MSA COMPATIBLE TRANSCEIVER.
- 12. SURFACE TRACES PERMITTED WITHIN THIS AREA EXCEPT WHERE CAGE STANDOFFS, SHOWN IN DETAIL S, CONTACT PC BOARD.
- 13. BASELINE FOR THESE DIMENSIONS IS THE CENTER OF COMPLIANT PIN HOLE.
- 14. 2D BARCODE AND DATE CODE (YYWW) MARKED ON SIDE OF CAGE.

- 15. REFERENCE APP SPEC 114-13218 FOR GASKET THICKNESS CALCULATION.
- 16. EMI SPRING FINISH: 2um MINIMUM TIN  
 FRONT FLANGE FINISH: 3um MINIMUM TIN OVER 1.27um MINIMUM NICKEL  
 OVER 5.08um MINIMUM COPPER.  
 HEAT SINK FINISH: NICKEL

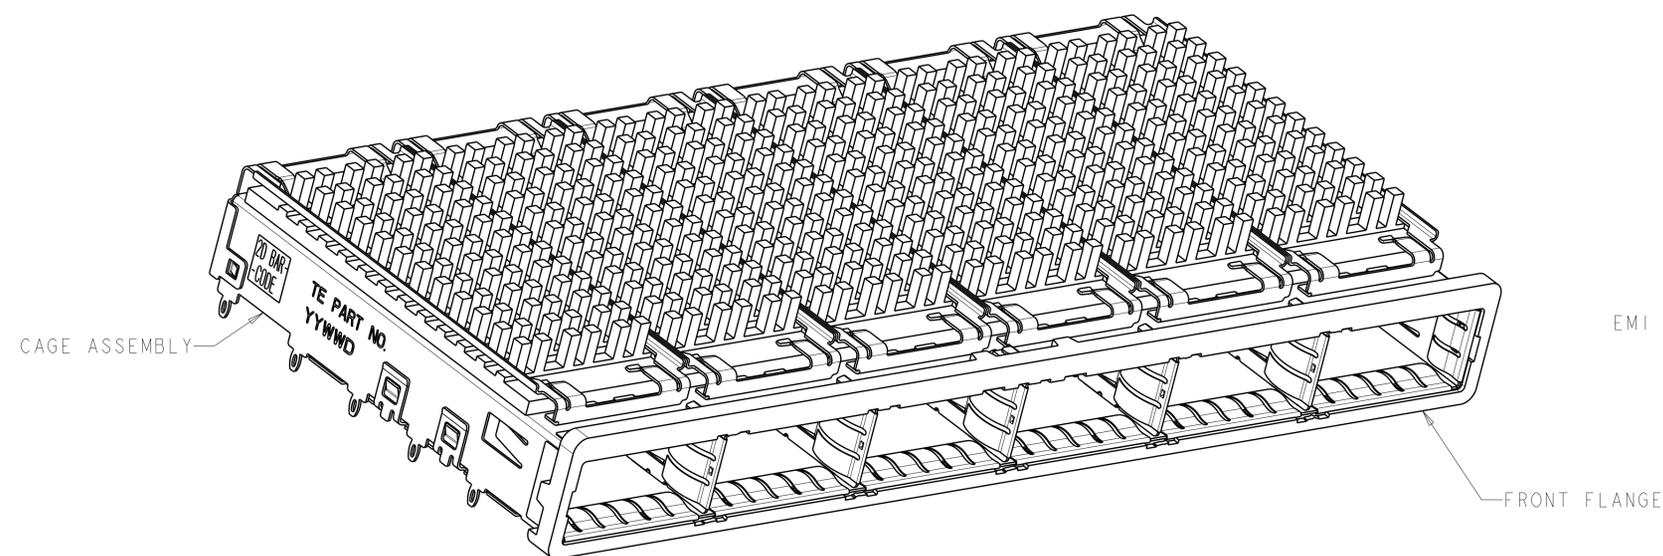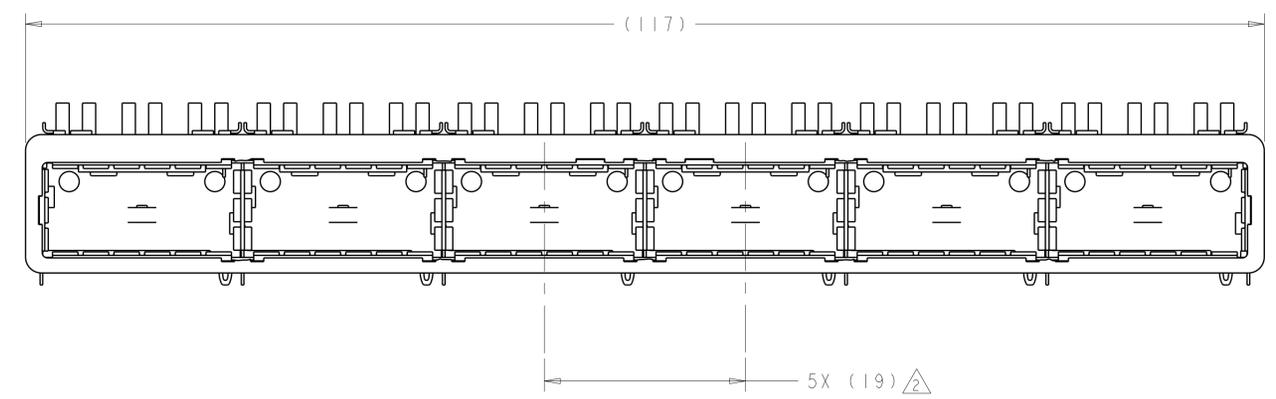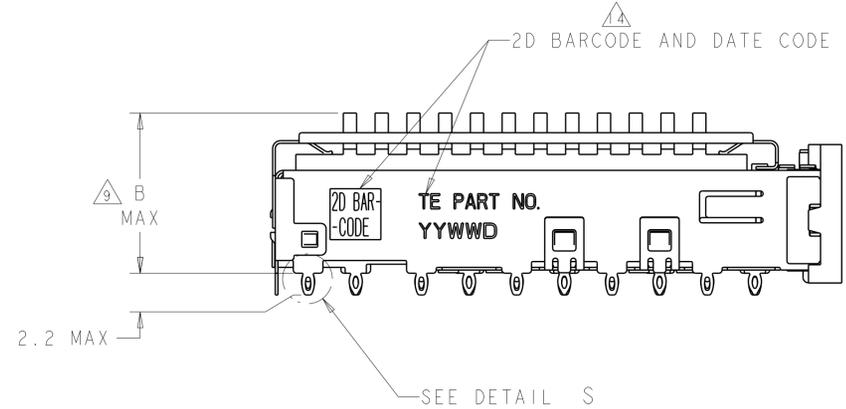


23.0	NETWORKING	2143330-3
16.0	SAN	2143330-2
13.7	PCI	2143330-1
B	HEAT SINK PROFILE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN: C. VALENTINE 17MAR2010	NAME: 1X6 CAGE ASSEMBLY, BEHIND BEZEL, W/ HEAT SINKS, QSFP
mm	0 PLC ±0.1	CHK: J. PETERSON 17MAR2010	SIZE: CAGE CODE DRAWING NO
	1 PLC ±0.1	APVD: J. PETERSON 17MAR2010	RESTRICTED TO
	2 PLC ±0.1	PRODUCT SPEC: 108-2286	A100779C=2143330
	3 PLC ±0.1	APPLICATION SPEC: 114-13218	SCALE: 3:1 SHEET 1 OF 5 REV A
	4 PLC ±0.1	WEIGHT: -	Customer Drawing
	ANGLES ±0.1		
MATERIAL: 1	FINISH: 16		

LOC	DIST	REVISIONS					
		P.	LYR	DESCRIPTION	DATE	DWN	APVD
GP	00	-	-	SEE SHEET 1	-	-	-

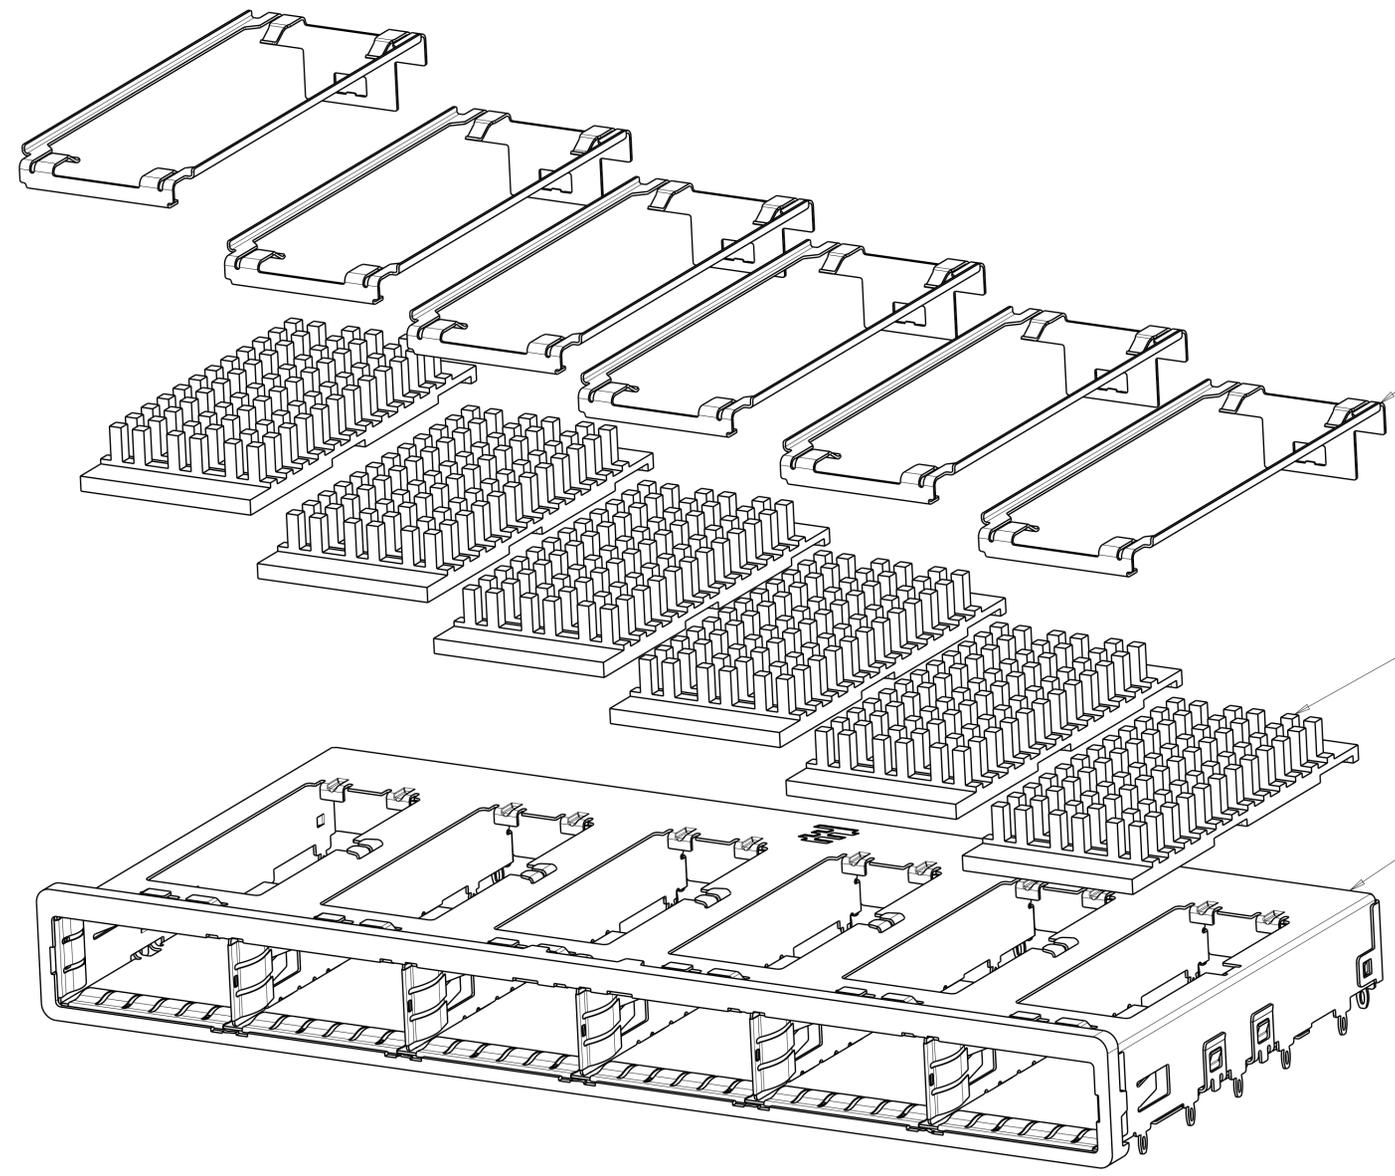


HEAT SINK CLIPS  
 QUANTITY: 6

72 PIN HEAT SINKS  
 QUANTITY: 6



1X6 BEHIND BEZEL QSFP  
 CAGE ASSEMBLY  
 QUANTITY: 1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	C. VALENTINE	17MAR2010	TE Connectivity
DIMENSIONS:		CHK	J. PETERSON	17MAR2010	
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	J. PETERSON	17MAR2010	NAME
0 PLC	±	PRODUCT SPEC	108-2286		1X6 CAGE ASSEMBLY, BEHIND BEZEL, W/ HEAT SINKS, QSFP
1 PLC	±0.1	APPLICATION SPEC	114-13218		SIZE
2 PLC	±0.1	WEIGHT	-		A100779
3 PLC	±	Customer Drawing	-		C=2143330
4 PLC	±	SCALE	3:1		SHEET 2 OF 5
ANGLES	±	REV	-		A
MATERIAL	FINISH				


LOC	DIST	REVISIONS			
GP	00	REV	DATE	BY	APPD
-	-	SEE SHEET 1	-	-	-

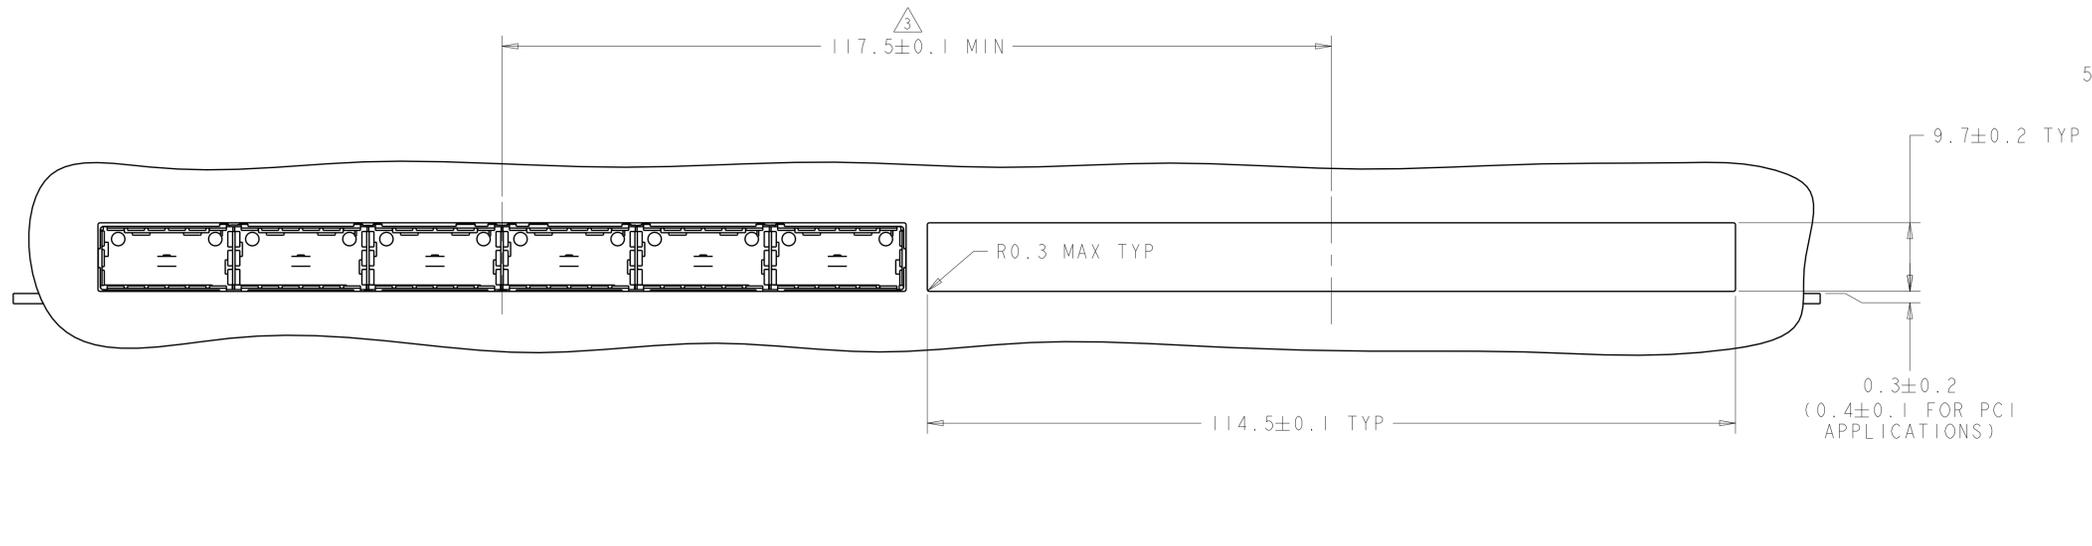

ONE SIDED CONFIGURATION  
 SCALE 2:1

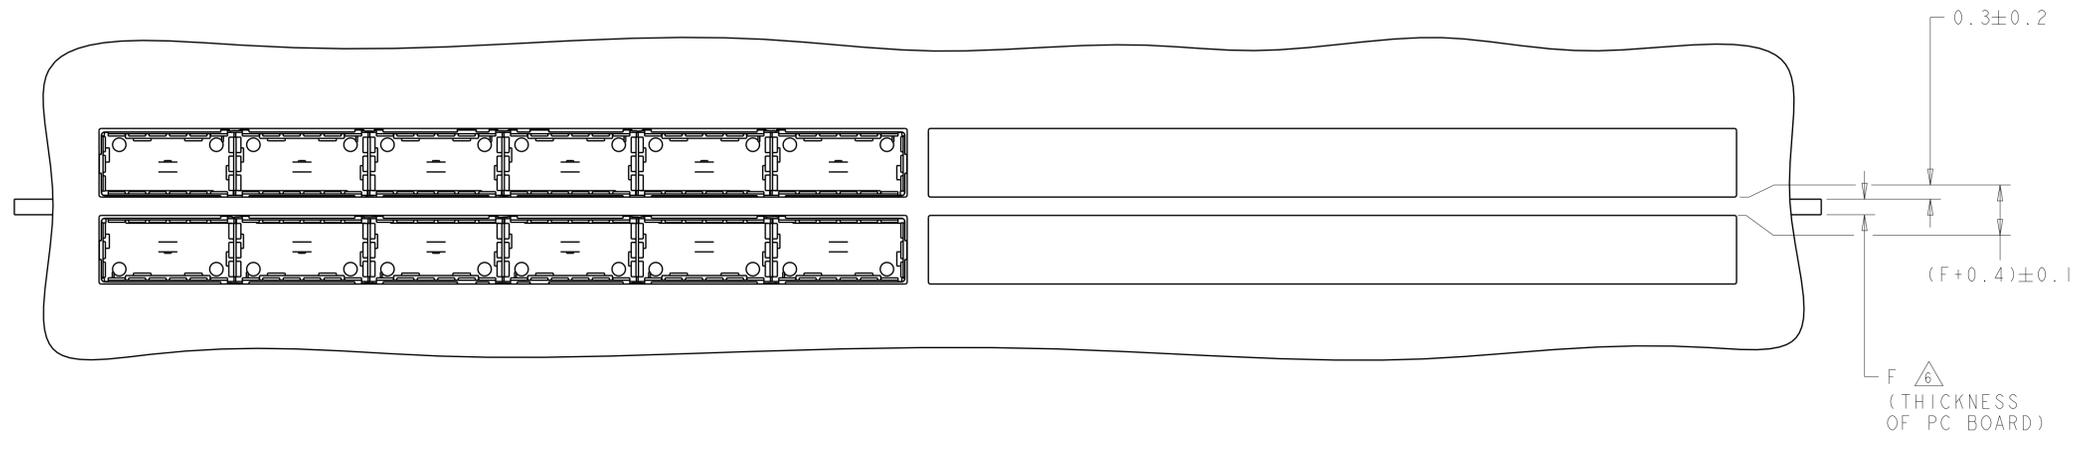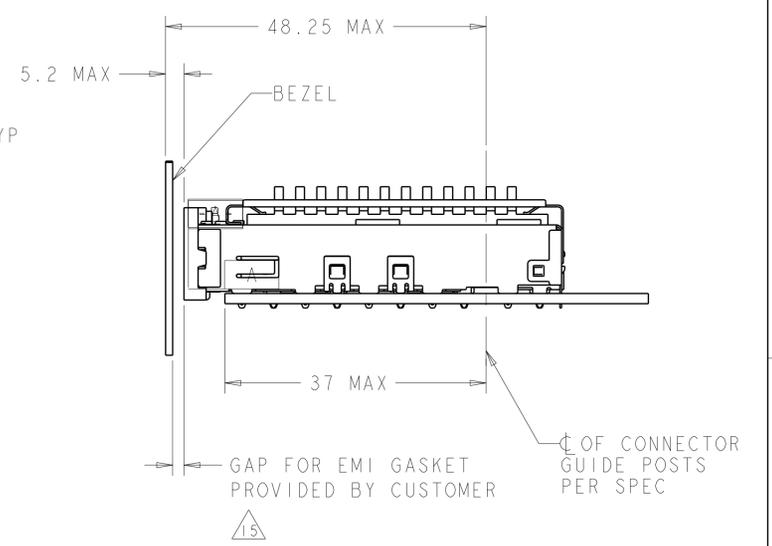

BELLY TO BELLY CONFIGURATION  
 SIMILAR TO ONE SIDED  
 EXCEPT WHERE NOTED  
 SCALE 2:1



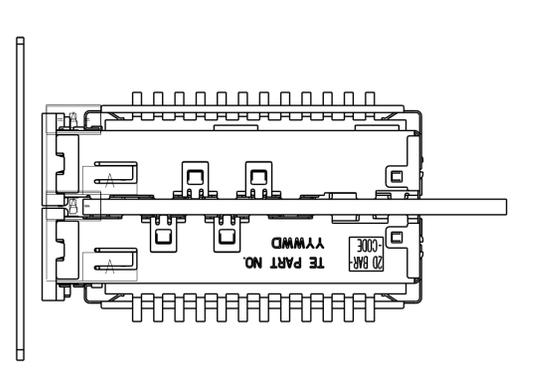


THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN C. VALENTINE 17MAR2010	TE Connectivity	
DIMENSIONS:		CHK J. PETERSON 17MAR2010		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J. PETERSON 17MAR2010	NAME 1X6 CAGE ASSEMBLY, BEHIND BEZEL, W/ HEAT SINKS, QSFP	
0 PLC ±	1 PLC ±0.1	PRODUCT SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
2 PLC ±0.1	3 PLC ±	108-2286	A100779C=2143330	
4 PLC ±	ANGLES ±	APPLICATION SPEC	SCALE 3:1 SHEET 3 OF 5 REV A	
MATERIAL	FINISH	114-13218	Customer Drawing	

LOC	DIST	REV	DATE	BY	APPV
GP	00				

REVISIONS			
NO.	DESCRIPTION	DATE	BY
-	SEE SHEET 1	-	-

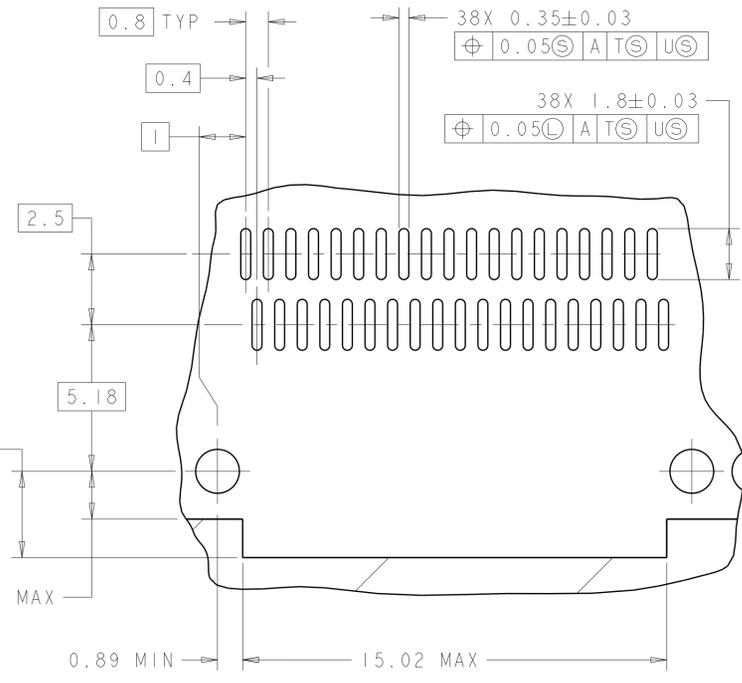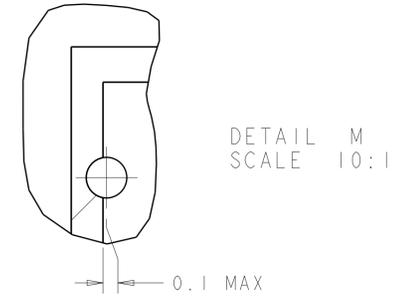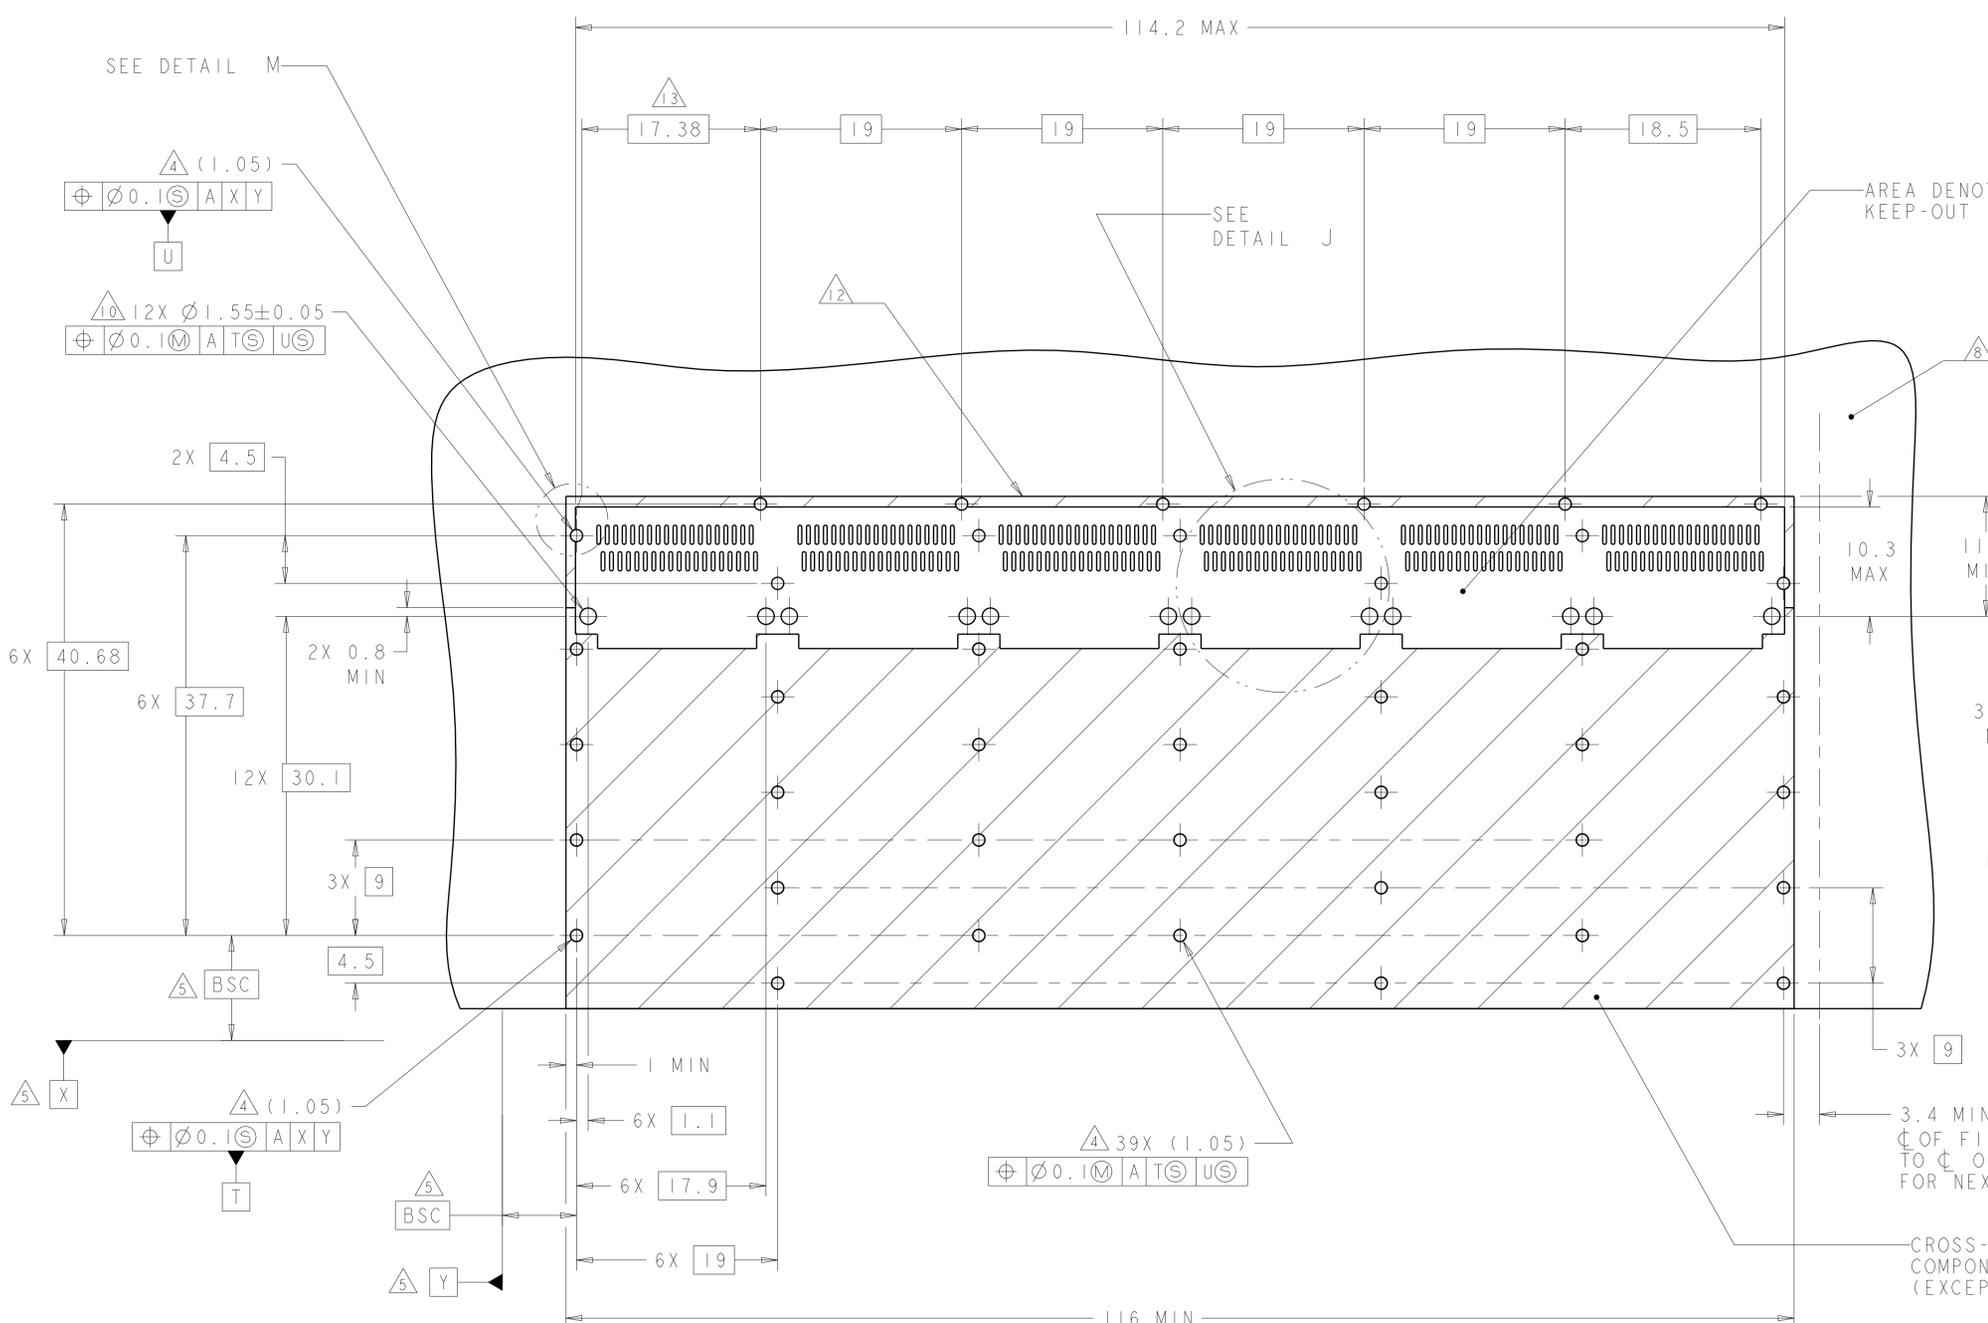

RECOMMENDED PC BOARD LAYOUT  
 SINGLE SIDE MOUNT CONFIGURATION  
 SCALE 3:1



AREA DENOTES COMPONENT  
 KEEP-OUT (TRACES PERMITTED)

3.4 MIN  
 CL OF FINAL ROW OF HOLES  
 TO CL OF FIRST ROW OF HOLES  
 FOR NEXT ADJACENT CAGE

CROSS-HATCHED AREA DENOTES  
 COMPONENT AND TRACE KEEP-OUT  
 (EXCEPT CHASSIS GROUND)

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: C. VALENTINE 17MAR2010	TE Connectivity
DIMENSIONS: mm		CHK: J. PETERSON 17MAR2010	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: J. PETERSON 17MAR2010	NAME: 1X6 CAGE ASSEMBLY, BEHIND BEZEL, W/ HEAT SINKS, QSFP
0 PLC ±	1 PLC ±0.1	PRODUCT SPEC: 108-2286	SIZE: A100779
2 PLC ±0.1	3 PLC ±	APPLICATION SPEC: 114-13218	CAGE CODE: C=2143330
4 PLC ±	ANGLES ±	WEIGHT: -	RESTRICTED TO: -
MATERIAL: -	FINISH: -	Customer Drawing	SCALE: 4:1 SHEET 4 OF 5 REV A

LOC	DIST	REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD
-	-	SEE SHEET 1	-	-	-

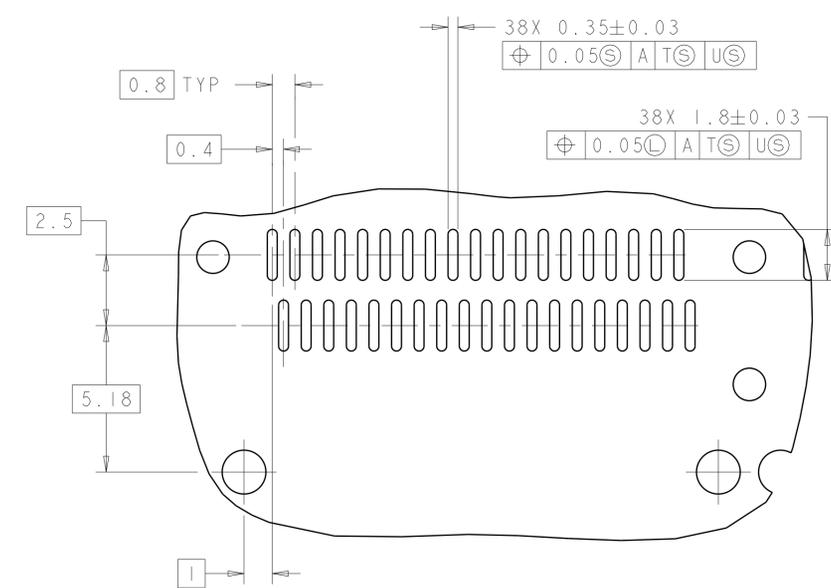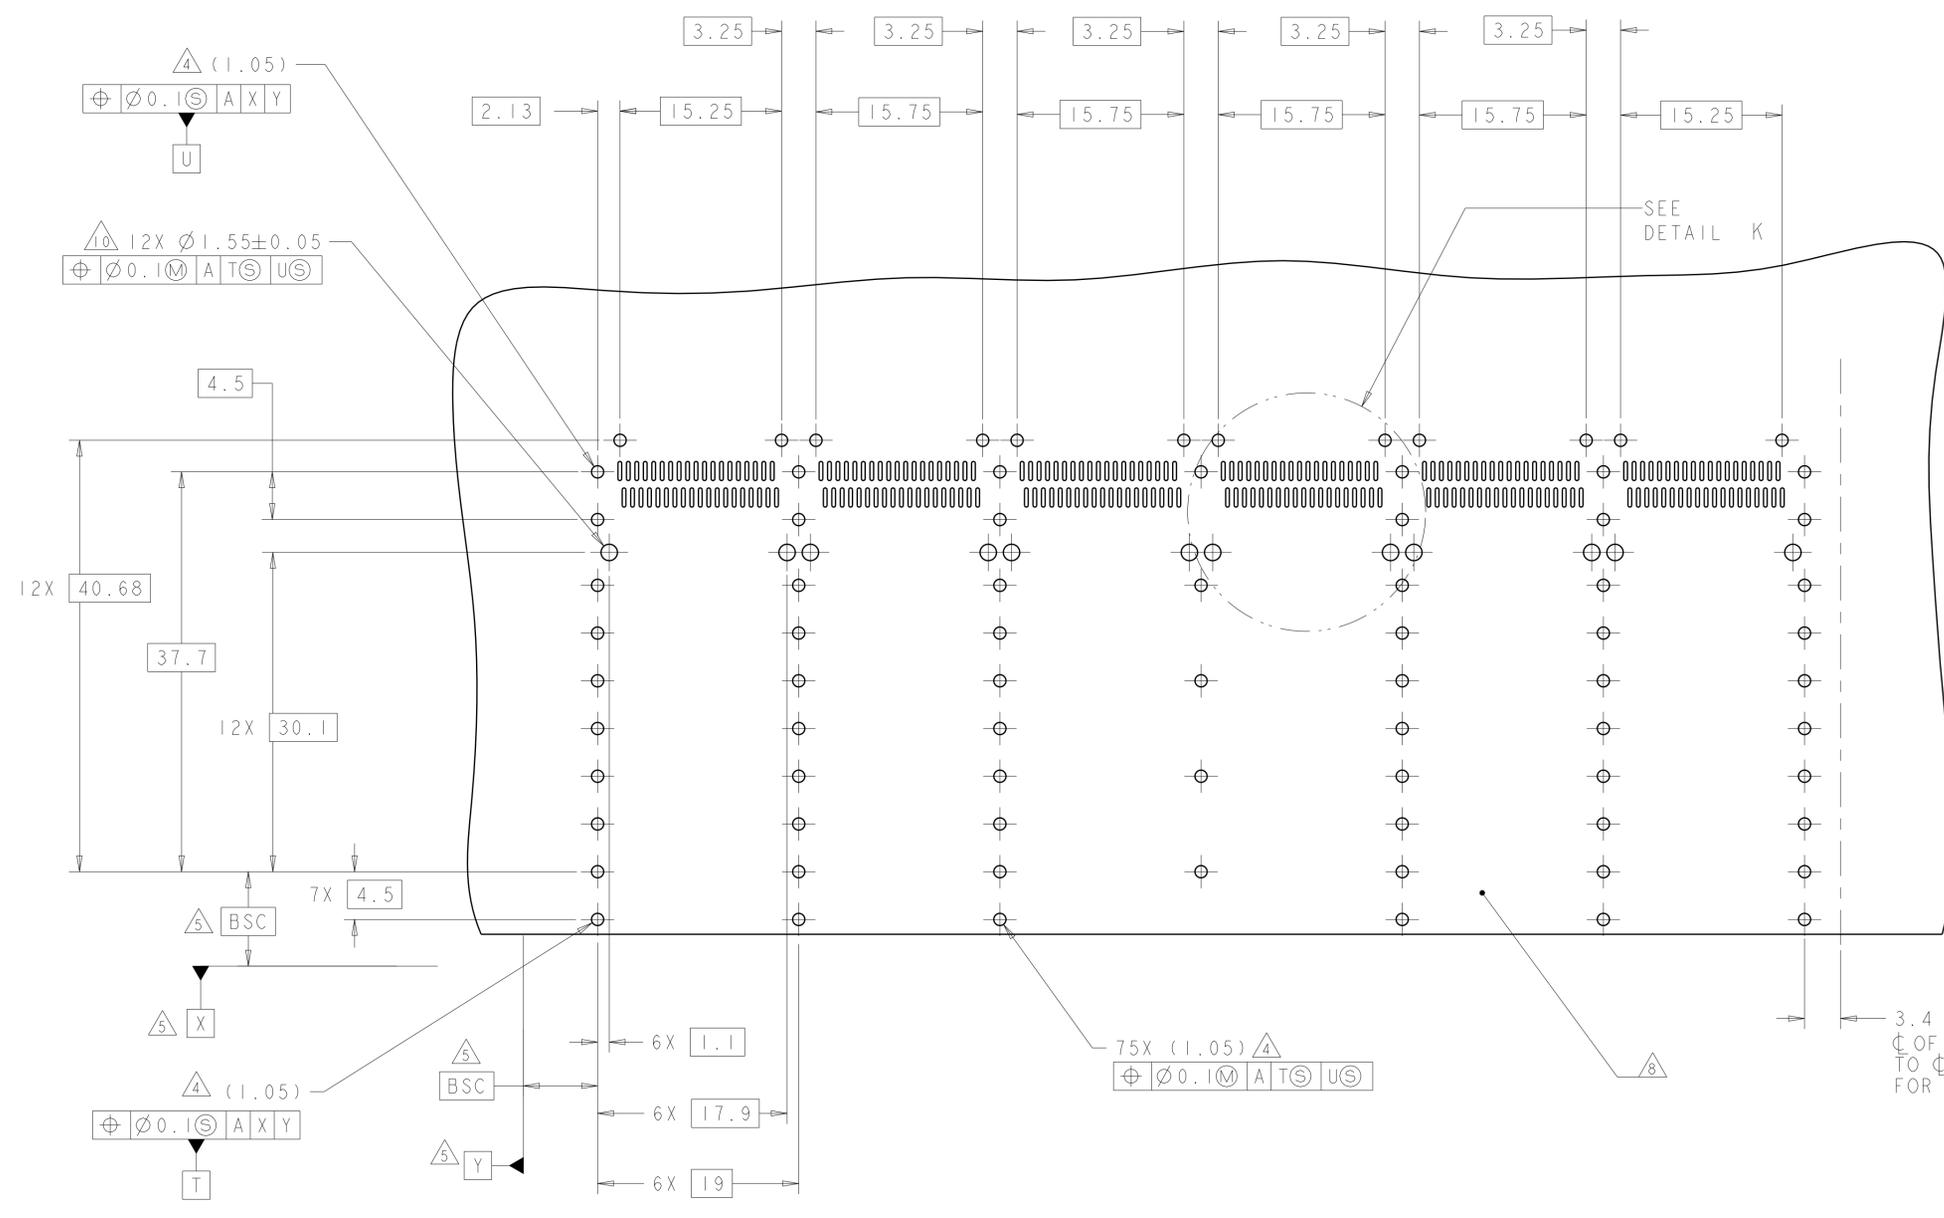

DETAIL K  
 6 PLACES  
 SCALE 8:1

RECOMMENDED PC BOARD LAYOUT  
 BELLY TO BELLY CONFIGURATION  
 SEE SHEET 4 FOR COMPONENT AND TRACE KEEP-OUTS  
 SCALE 3:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN C. VALENTINE 17MAR2010	TE Connectivity
DIMENSIONS: mm		CHK J. PETERSON 17MAR2010	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. PETERSON 17MAR2010	NAME 1X6 CAGE ASSEMBLY, BEHIND BEZEL, W/ HEAT SINKS, QSFP
0 PLC ±0.1	1 PLC ±0.1	PRODUCT SPEC 108-2286	SIZE A100779
2 PLC ±0.1	3 PLC ±0.1	APPLICATION SPEC 114-13218	CAGE CODE C=2143330
4 PLC ±0.1	ANGLES ±0.1	WEIGHT	RESTRICTED TO
MATERIAL	FINISH	Customer Drawing	SCALE 4:1 SHEET 5 OF 5 REV A

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9