



### FEATURES

- Fully encapsulated Plastic Case
- 3 Mounting Versions:
  - PCB Mounting with Solder Pins
  - Chassis Mounting with Screw Terminals
  - DIN-Rail Mounting
- Package Dimension 88.9x67.5x34.2 mm (PCB Mounting Version)
- Universal Input 85-264VAC, 47-440 Hz
- Protection Class II
- Extended Operating Temp.Range -40°C to +60°C at full Load
- LED Output Indicator (Chassis Version Models)
- Industrial Safety to UL/cUL/IEC/EN 60950-1 and UL508
- Medical Safety Approval to UL/cUL/IEC/EN 60601-1 3<sup>rd</sup> Edition
- Over Load Protection
- 3 Year Product Warranty



The new AB60S series is a range of fully encapsulated AC/DC power modules. These high performance products feature an extended operating temperature range of -40°C to +80°C. Universal input voltage 85-264VAC and UL/IEC/EN safety approvals including medical safety and UL508 listing qualify these power supplies modules for applications in products with worldwide markets. EMI-filter meets EN55022, class B and FCC, part 15, class B.

The AB60S series power modules provide an economical solution for many space critical applications in commercial, medical and industrial electronic equipment.

### Model Selection Guide

| Model Number PCB Mounting | Output Voltage | Output Current<br>Max.<br>mA | Input Current |              | Max. capacitive Load<br>μF | Efficiency (typ.)<br>@Max. Load, 115VAC<br>% |
|---------------------------|----------------|------------------------------|---------------|--------------|----------------------------|----------------------------------------------|
|                           |                |                              | 115VAC, 60Hz  | 230VAC, 50Hz |                            |                                              |
|                           | VDC            | @Max. Load<br>mA(typ.)       |               |              |                            |                                              |
| AB60S0500A                | 5.1            | 10000                        | 880           | 528          | 8000                       | 84                                           |
| AB60S1200A                | 12             | 5000                         | 1000          | 600          | 3900                       | 87                                           |
| AB60S1500A                | 15             | 4000                         | 1000          | 600          | 3300                       | 87                                           |
| AB60S2400A                | 24             | 2500                         | 1000          | 600          | 1500                       | 87                                           |
| AB60S4800A                | 48             | 1250                         | 988           | 593          | 680                        | 88                                           |

## Input Specifications

| Parameter                           | Model      | Min. | Typ. | Max. | Unit |
|-------------------------------------|------------|------|------|------|------|
| AC Voltage Input Range              | All Models | 85   | ---  | 264  | VAC  |
| Input Frequency Range               |            | 47   | ---  | 440  | Hz   |
| DC Voltage Input Range              |            | 120  | ---  | 370  | VDC  |
| No-Load Power Consumption           |            | ---  | 0.5  | ---  | W    |
| Inrush Current (Cold Start at 25°C) | 115VAC     | ---  | ---  | 30   | A    |
|                                     | 230VAC     | ---  | ---  | 60   | A    |

## Output Specifications

| Parameter                | Conditions                                                                           | Min.                   | Typ.  | Max. | Unit                |                                    |
|--------------------------|--------------------------------------------------------------------------------------|------------------------|-------|------|---------------------|------------------------------------|
| Output Voltage Accuracy  |                                                                                      | ---                    | ±1.0  | ±2.0 | %                   |                                    |
| Line Regulation          | V <sub>in</sub> =Min. to Max.                                                        | ---                    | ±0.2  | ±1.0 | %                   |                                    |
| Load Regulation          | I <sub>out</sub> =Min. to Max.                                                       | ---                    | ±0.5  | ±1.0 | %                   |                                    |
| Min.Load                 | No minimum Load Requirement                                                          |                        |       |      |                     |                                    |
| Ripple & Noise           | 0-20 MHz Bandwidth                                                                   | (5.1VDC Output Models) | ---   | 2.0  | 3.0                 | %V <sub>PP</sub> of V <sub>o</sub> |
|                          |                                                                                      | (Other Output Models)  | ---   | 1.0  | 1.5                 | %V <sub>PP</sub> of V <sub>o</sub> |
| Over Voltage Protection  | Zener diode clamp                                                                    | ---                    | 120   | ---  | % of V <sub>o</sub> |                                    |
| Temperature Coefficient  |                                                                                      | ---                    | ±0.02 | ---  | %/°C                |                                    |
| Overshoot                |                                                                                      | ---                    | ---   | 5    | %                   |                                    |
| Current Limitation       | 85VAC, Hiccup Mode, auto-recovery<br>(long term overload condition may cause damage) | 105                    | ---   | ---  | %I <sub>nom.</sub>  |                                    |
| Short Circuit Protection | Hiccup mode, indefinite (automatic recovery)                                         |                        |       |      |                     |                                    |

## General Specifications

| Parameter                          | Conditions                        | Min.                                                                                                                | Typ. | Max. | Unit   |
|------------------------------------|-----------------------------------|---------------------------------------------------------------------------------------------------------------------|------|------|--------|
| I/O Isolation Voltage (reinforced) |                                   | 4000                                                                                                                | ---  | ---  | VACrms |
| Leakage Current                    |                                   | ---                                                                                                                 | 80   | ---  | μA     |
| I/O Isolation Resistance           | 500 VDC                           | 1000                                                                                                                | ---  | ---  | MΩ     |
| Switching Frequency                |                                   | ---                                                                                                                 | 100  | ---  | KHz    |
| Hold-up Time                       | 115VAC, 60Hz                      | ---                                                                                                                 | 20   | ---  | ms     |
|                                    | 230VAC, 50Hz                      | ---                                                                                                                 | 80   | ---  | ms     |
| MTBF (calculated)                  | MIL-HDBK-217F@25°C, Ground Benign | 125,000                                                                                                             | ---  | ---  | Hours  |
| Protection Class II                |                                   | According IEC/EN 60536                                                                                              |      |      |        |
| Safety Approvals                   |                                   | IEC/EN 60950-1, 60601-1 3 <sup>rd</sup> , 2XMOPP<br>cUL/UL 60950-1, 60601-1 3 <sup>rd</sup> , 2XMOPP, UL 508 listed |      |      |        |

## EMC Specifications

| Parameter                  | Standards & Level                     | Performance |
|----------------------------|---------------------------------------|-------------|
| Conducted and radiated EMI | EN55011, EN55022, FCC part 15         | Class B     |
| ESD                        | EN61000-4-2 air ± 8kV , Contact ± 4kV | A           |
| Radiated immunity          | EN61000-4-3 10V/m                     | A           |
| Fast transient             | EN61000-4-4 ± 2kV                     | A           |
| Surge                      | EN61000-4-5 ±1kV                      | A           |
| Conducted immunity         | EN61000-4-6 10Vrms                    | A           |
| PFMF                       | EN61000-4-8 30A/m                     | A           |
| Dips                       | EN61000-4-11 30% 10ms                 | A           |
| Interruption               | EN61000-4-11 >95% 5000ms              | B           |

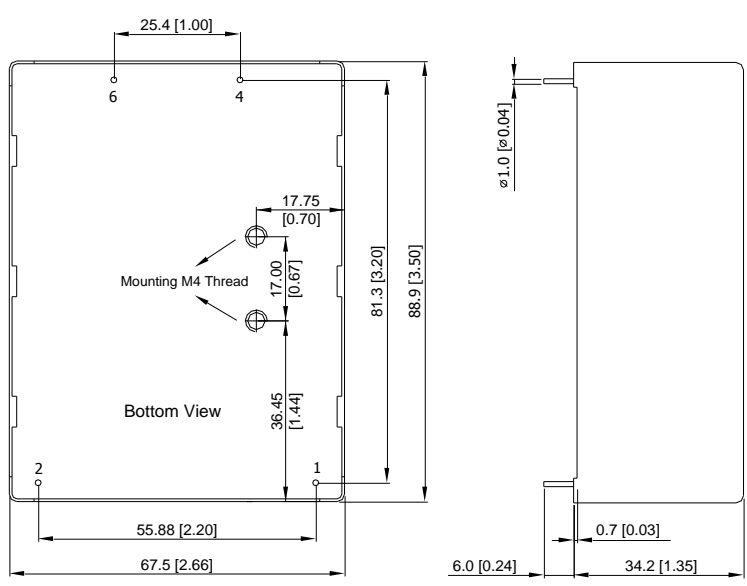
## Environmental Specifications

| Parameter                       | Conditions          | Min.  | Max.       |
|---------------------------------|---------------------|-------|------------|
| Temperature Range (operational) | Ambient             | -40°C | +80°C      |
| Power Derating                  | Above +60°C         |       | 2.3W / °C  |
| Storage Temperature Range       |                     | -40°C | +95°C      |
| Humidity (non condensing)       |                     | ---   | 95% rel. H |
| Cooling                         | Free-Air convection |       |            |

## Notes

- 1 This product is not designed for use in critical life support systems, equipment used in hazardous environment, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet.
- 2 Specifications typical at Ta=+25°C, resistive load, 115VAC, 60Hz input voltage, after warm-up time rated output current unless otherwise noted.
- 3 Safety approvals cover frequency 47-63 Hz.
- 4 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 5 Other input and output voltage may be available, please contact factory.
- 6 To order the module with chassis mount package, please add a **suffix C** (e.g. AB60S1500C).
- 7 To order the module in chassis mount with DIN-Rail kit, please add a **suffix D** (e.g. AB60S1500D).
- 8 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 9 Specifications are subject to change without notice.

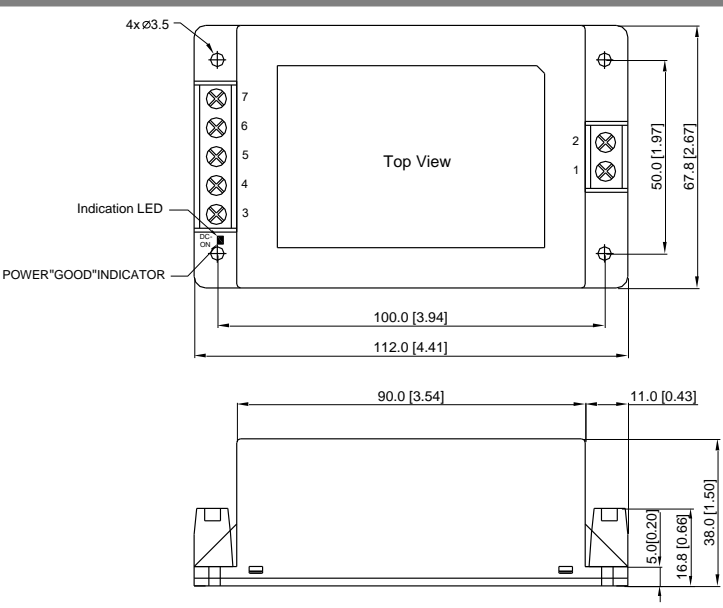
## Package Specifications PCB Mounting

| Mechanical Dimensions                                                                                                                                                                                                                                                                                                                        | Pin Connections                                                                                                                                                                                                                                               |          |          |   |        |   |        |   |       |   |       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|---|--------|---|--------|---|-------|---|-------|
|  <p>Bottom View</p> <p>Mounting M4 Thread</p> <p>Dimensions: 25.4 [1.00], 17.75 [0.70], 17.00 [0.67], 36.45 [1.44], 81.3 [3.20], 88.9 [3.50], 55.88 [2.20], 67.5 [2.66], 6.0 [0.24], 34.2 [1.35], 0.7 [0.03], <math>\varnothing 1.0 [\pm 0.04]</math></p> | <table border="1"> <thead> <tr> <th>Pin</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AC (N)</td> </tr> <tr> <td>2</td> <td>AC (L)</td> </tr> <tr> <td>4</td> <td>+Vout</td> </tr> <tr> <td>6</td> <td>-Vout</td> </tr> </tbody> </table> | Pin      | Function | 1 | AC (N) | 2 | AC (L) | 4 | +Vout | 6 | -Vout |
|                                                                                                                                                                                                                                                                                                                                              | Pin                                                                                                                                                                                                                                                           | Function |          |   |        |   |        |   |       |   |       |
| 1                                                                                                                                                                                                                                                                                                                                            | AC (N)                                                                                                                                                                                                                                                        |          |          |   |        |   |        |   |       |   |       |
| 2                                                                                                                                                                                                                                                                                                                                            | AC (L)                                                                                                                                                                                                                                                        |          |          |   |        |   |        |   |       |   |       |
| 4                                                                                                                                                                                                                                                                                                                                            | +Vout                                                                                                                                                                                                                                                         |          |          |   |        |   |        |   |       |   |       |
| 6                                                                                                                                                                                                                                                                                                                                            | -Vout                                                                                                                                                                                                                                                         |          |          |   |        |   |        |   |       |   |       |
|                                                                                                                                                                                                                                                                                                                                              | <ul style="list-style-type: none"> <li>▶ All dimensions in mm (inches)</li> <li>▶ Tolerance: <math>\pm 1.0 (\pm 0.04)</math></li> <li>▶ Pin diameter <math>\varnothing 1.0 \pm 0.1 (0.04 \pm 0.004)</math></li> </ul>                                         |          |          |   |        |   |        |   |       |   |       |

## Physical Characteristics

|               |                                                     |
|---------------|-----------------------------------------------------|
| Case Size     | : 88.9x67.5x34.2mm (3.50x2.66x1.35 inches)          |
| Case Material | : Plastic resin (flammability to UL 94V-0 rated)    |
| Pin Material  | : Copper Alloy with Gold Plate Over Nickel Subplate |
| Weight        | : 360g                                              |

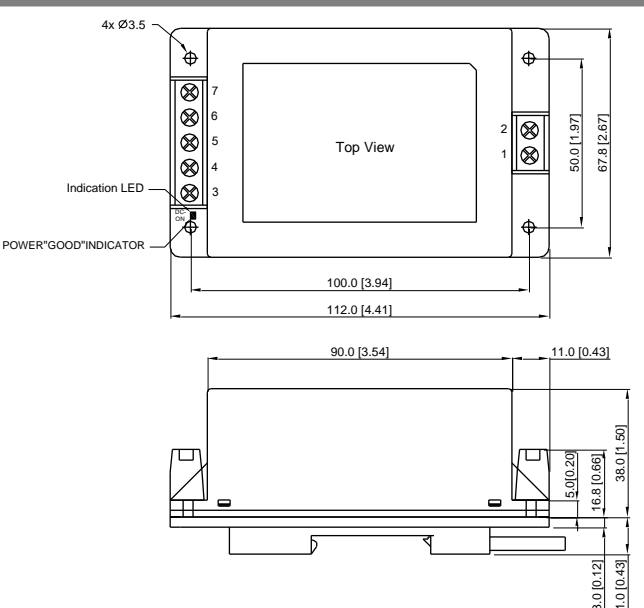
## Package Specifications Chassis Mounting (order code suffix C)

| Mechanical Dimensions                                                             |    | Connections                                                             |          |
|-----------------------------------------------------------------------------------|----|-------------------------------------------------------------------------|----------|
|  |    | Pi                                                                      | Function |
|                                                                                   |    | n                                                                       |          |
|                                                                                   |    | 1                                                                       | AC (N)   |
|                                                                                   |    | 2                                                                       | AC (L)   |
|                                                                                   |    | 3                                                                       | NC       |
|                                                                                   |    | 4                                                                       | +Vout    |
|                                                                                   |    | 5                                                                       | NC       |
|                                                                                   |    | 6                                                                       | -Vout    |
| 7                                                                                 | NC |                                                                         |          |
|                                                                                   |    | NC: No Connection                                                       |          |
|                                                                                   |    | <p>▶ All dimensions in mm (inches)</p> <p>▶ Tolerance: ±1.0 (±0.04)</p> |          |

## Physical Characteristics

|               |                                                  |
|---------------|--------------------------------------------------|
| Case Size     | : 112.0x67.8x38.0mm (4.41x2.67x1.50 inches)      |
| Case Material | : Plastic resin (flammability to UL 94V-0 rated) |
| Weight        | : 380g                                           |

## Package Specifications with DIN Rail Mounting Bracket (order code suffix D)

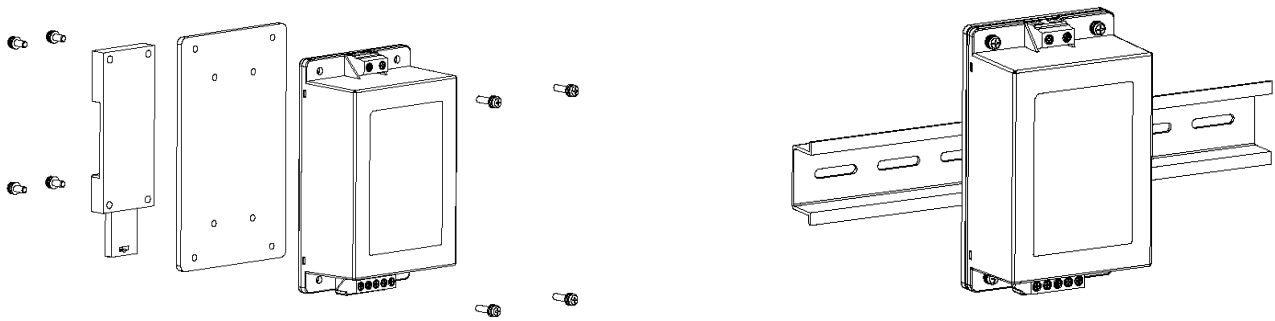
| Mechanical Dimensions                                                               |  |
|-------------------------------------------------------------------------------------|--|
|  |  |



## Physical Characteristics

|               |                                                  |
|---------------|--------------------------------------------------|
| Case Size     | : 112.0x67.8x38.0mm (4.41x2.67x1.50 inches)      |
| Case Material | : Plastic resin (flammability to UL 94V-0 rated) |
| Weight        | : 433g                                           |

## DIN-Rail Mounting Bracket



## Part Numbering System

| A                  | B                   | 60       | S                 | 05               | 00                  | A                  |
|--------------------|---------------------|----------|-------------------|------------------|---------------------|--------------------|
| Product type       | Family series       | Watt     | Number of Outputs | Output Voltage I | Output Voltage II   | Option Code        |
| AC/DC Power Module | Medical application | 60 – 60W | S - Single        | 05 - 5.1V        | 00 - not applicable | A - PCB Mount      |
|                    |                     |          |                   | 12 - 12V         |                     | C - Chassis Mount  |
|                    |                     |          |                   | 15 - 15V         |                     | D - Din Rail Mount |
|                    |                     |          |                   | 24 - 24V         |                     |                    |
|                    |                     |          |                   | 48 - 48V         |                     |                    |

### CONTACT: [www.deltaww.com/dcdc](http://www.deltaww.com/dcdc)

#### USA:

Telephone:

East Coast: 978-656-3993

West Coast: 510-668-5100

Fax: (978) 656 3964

Email: [DCDC@delta-corp.com](mailto:DCDC@delta-corp.com)

#### Europe:

Phone: +31-20-655-0967

Fax: +31-20-655-0999

Email: [DCDC@delta-es.com](mailto:DCDC@delta-es.com)

#### Asia & the rest of world:

Telephone: +886 3 4526107

ext 6220~6224

Fax: +886 3 4513485

Email: [DCDC@delta.com.tw](mailto:DCDC@delta.com.tw)

## WARRANTY

Delta offers a three(3) years limited warranty. Complete warranty information is listed on our web site or is available upon request from Delta.

Information furnished by Delta is believed to be accurate and reliable. However, no responsibility is assumed by Delta for its use, nor for any infringements of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Delta. Delta reserves the right to revise these specifications at any time, without notice

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9