

UM 25-D 9SUB/B/FRONT/Q


Order No.: 2959560



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2959560>

VARIOFACE SLIM LINE, with screw connection and D-subminiature socket strip, for assembly at a right angle on NS 35/7.5, 9 positions



| Commercial data | |
|--------------------------|--|
| GTIN (EAN) |  4 017918 086213 |
| sales group | I011 |
| Pack | 1 pcs. |
| Customs tariff | 85369010 |
| Catalog page information | Page 287 (IF-2009) |

Product notes

WEEE/RoHS-compliant since:
10/13/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

| | |
|---|--|
| Nominal voltage U_N | 125 V AC/DC |
| Max. current carrying capacity per branch | 2.5 A |
| | 1.5 A (with even load on all branches) |
| Number of positions | 9 |

| | |
|---|-------------------------|
| Width | 25 mm |
| Height | 117 mm |
| Depth | 45 mm |
| Ambient temperature (operation) | -10 °C ... 50 °C |
| Ambient temperature (storage/transport) | -10 °C ... 70 °C |
| Test voltage | 800 V (50 Hz, 1 min.) |
| Mounting position | Any |
| Standards/regulations | IEC 60664 |
| | IEC 60664 A |
| | DIN VDE 0109-11 |
| | DIN VDE 0160 (in parts) |
| Pollution degree | 2 |
| Surge voltage category | II |

Connection data

| | |
|--|---------------------|
| Connection 1 | PCB connection |
| Connection in acc. with standard | IEC / EN |
| Type of connection | Screw connection |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 12 |
| Stripping length | 8 mm |
| Screw thread | M3 |
| Connection 2 | D-SUB connection |
| Type of connection | Pluggable |

Certificates / Approvals



Certification

GOST

| Accessories | | |
|------------------------|------------------------------------|---|
| Item | Designation | Description |
| Cable/conductor | | |
| 2302434 | CABLE D-SUB-S-S-S/.../.../... | Shielded round cable, assembled with two D-SUB male connectors, variable cable length |
| 2302340 | CABLE D-SUB-S/.../.../... | Shielded round cable, assembled with one D-SUB male and one female connector, variable cable length |
| 2299987 | CABLE-D 9SUB/B/S/ 50/ KONFEK/S | Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 0.5 m |
| 2299990 | CABLE-D 9SUB/B/S/100/ KONFEK/S | Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 1 m |
| 2300009 | CABLE-D 9SUB/B/S/150/ KONFEK/S | Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 1.5 m |
| 2302010 | CABLE-D 9SUB/B/S/200/ KONFEK/S | Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 2 m |
| 2302023 | CABLE-D 9SUB/B/S/300/ KONFEK/S | Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 3 m |
| 2302036 | CABLE-D 9SUB/B/S/400/ KONFEK/S | Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 4 m |
| 2302049 | CABLE-D 9SUB/B/S/600/ KONFEK/S | Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 6 m |
| 2926360 | CABLE-D- 9SUB/M/OE/0,25/ S/0,5M | Shielded cable with a 9-pos. D-SUB pin strip and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 0.5 m. |
| 2926373 | CABLE-D- 9SUB/M/OE/0,25/ S/1,0M | Shielded cable with a 9-pos. D-SUB pin strip and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 1 m. |
| 2926386 | CABLE-D- 9SUB/M/OE/0,25/ S/1,5M | Shielded cable with a 9-pos. D-SUB pin strip and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 1.5 m. |
| 2926399 | CABLE-D- 9SUB/M/OE/0,25/ S/2,0M | Shielded cable with a 9-pos. D-SUB pin strip and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 2 m. |
| 2926409 | CABLE-D- 9SUB/M/OE/0,25/ S/3,0M | Shielded cable with a 9-pos. D-SUB pin strip and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 3 m. |
| 2926412 | CABLE-D- 9SUB/M/OE/0,25/ S/4,0M | Shielded cable with a 9-pos. D-SUB pin strip and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 4 m. |


| | | |
|---------|--------------------------------|---|
| 2926425 | CABLE-D- 9SUB/M/OE/0,25/S/6,0M | Shielded cable with a 9-pos. D-SUB pin strip and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 6 m. |
|---------|--------------------------------|---|

General

| | | |
|---------|-------------------------------|--|
| 2900909 | CABLE-D- 9SUB-M-OE-0,25-S/... | Shielded cable with a 9-pos. D-SUB pin strip and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: variable. |
|---------|-------------------------------|--|

Diagrams/Drawings

Circuit diagram

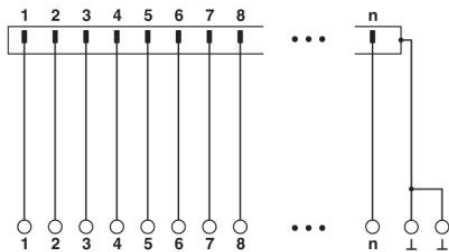

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9