

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD

D

C

B

A


REPLACED BY OCEAN STYLE APPLICATOR PART NUMBER

FOR REPLACEMENT PARTS FOR APPLICATOR REFER TO ADDITIONAL PAGE(S). SPARE PARTS KIT (IF LISTED) WILL REMAIN AVAILABLE.

THE REPLACEMENT OCEAN STYLE APPLICATOR HAS THE SAME TERMINATOR/PRESS INTERFACE AS APPLICATOR

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±

MATERIAL

FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

TE Connectivity

NAME

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

C-

SCALE

SHEET OF

REV

1470-19 (3/11)

Pro/ENGINEER DRAWING

THIS DRAWING IS A CONTROLLED DOCUMENT

LAYOUT L1426403

SET UP GAGE 458637-3

2002

RELEASED FOR PUBLICATION BY AMP INCORPORATED. ALL RIGHTS RESERVED.


THIS DRAWING IS UNPUBLISHED. © COPYRIGHT 2002

DRAWING MADE IN THIRD ANGLE PROJECTION

PART NUMBER	REV	FIRST USED	TERMINATOR	FEED TYPE	DESCRIPTION
1528227-1	C	-	LEADMAKER	MECH POST FEED	CUTS CARRIER
1528227-2	C	-	BENCH	MECH PRE FEED	CUTS CARRIER
1528227-6	C	-	LEADMAKER	MECH POST FEED	CONTINUOUS CARRIER
7-1528227-1	C	-	LEADMAKER	MECH POST FEED	-1 AND SPARE PARTS
7-1528227-2	C	-	BENCH	MECH PRE FEED	-2 AND SPARE PARTS
7-1528227-6	C	-	LEADMAKER	MECH POST FEED	-6 AND SPARE PARTS
7-1528227-7	A	-	-	-	SPARE PARTS KIT


CRIMP DATA AMP TERMINAL AMP CRIMP SPECS				
TERMINAL NAME: SOCKET CONTACT 0.63X1.5MM				
CRIMP	SIZE	TYPE	RANGE	
WIRE	2.03 [.080 IN]	F	0.75-1.50mm ²	
INSUL	3.43 [.135 IN]	0	2.60 MAX [.102 IN MAX]	
WIRE STRIP LENGTH		APPL INSTRUCTION		
4.30-4.90 [.169-.193 IN]		408-8322 & 408-8490		
TERMINAL	-	-		FEED
APPL SPEC	114-18286	-	-	7.00 [.276 IN]
TERMINALS APPLIED				
TERMINAL	SEAL	-	-	-
1241605	967067-1	-	-	-
-	963142-1	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
WIRE SIZE		CRIMP HEIGHT		REF SETTING
mm ² AWG		✱	✱	
1.50mm ²		1.44 ±0.05 [.057 ±.002 IN]		B8
1.00mm ²		1.25 ±0.05 [.049 ±.002 IN]		D1
0.75mm ²		1.15 ±0.05 [.045 ±.002 IN]		D8
-		-		-
-		-		-
-		-		-
-		-		-
-		-		-
-		-		-
-		-		-
-		-		-
-		-		-
-		-		-
-		-		-
-		-		-
-		-		-

1. RECOMMENDED SPARE PARTS.
2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. THIS APPLICATOR APPLIES TERMINAL WITH A SEAL. INSULATION Ø QUOTED IS OUTER Ø OF SEAL & THE INSULATION DIAMETER IS DEPENDENT UPON SEAL BEING APPLIED.
5. APPLY TORQ-SEAL IN ALLEN SOCKET TO FILL HOLE AFTER FLAT HD HAS BEEN ADJUSTED TO CORRECT HEIGHT AT QUALIFICATION. APPLY #1-23419-5 LOC-TITE TO THREADS.
6. HOLDER, TERMINAL (ITEM NO.18) POSITIONED 0.6 [.023 IN] FROM UNDERSIDE OF RAM SURFACE (ITEM NO.44).

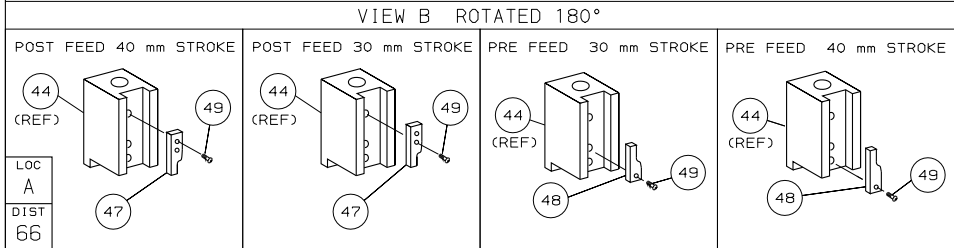

* WARNING:

ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MIN REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

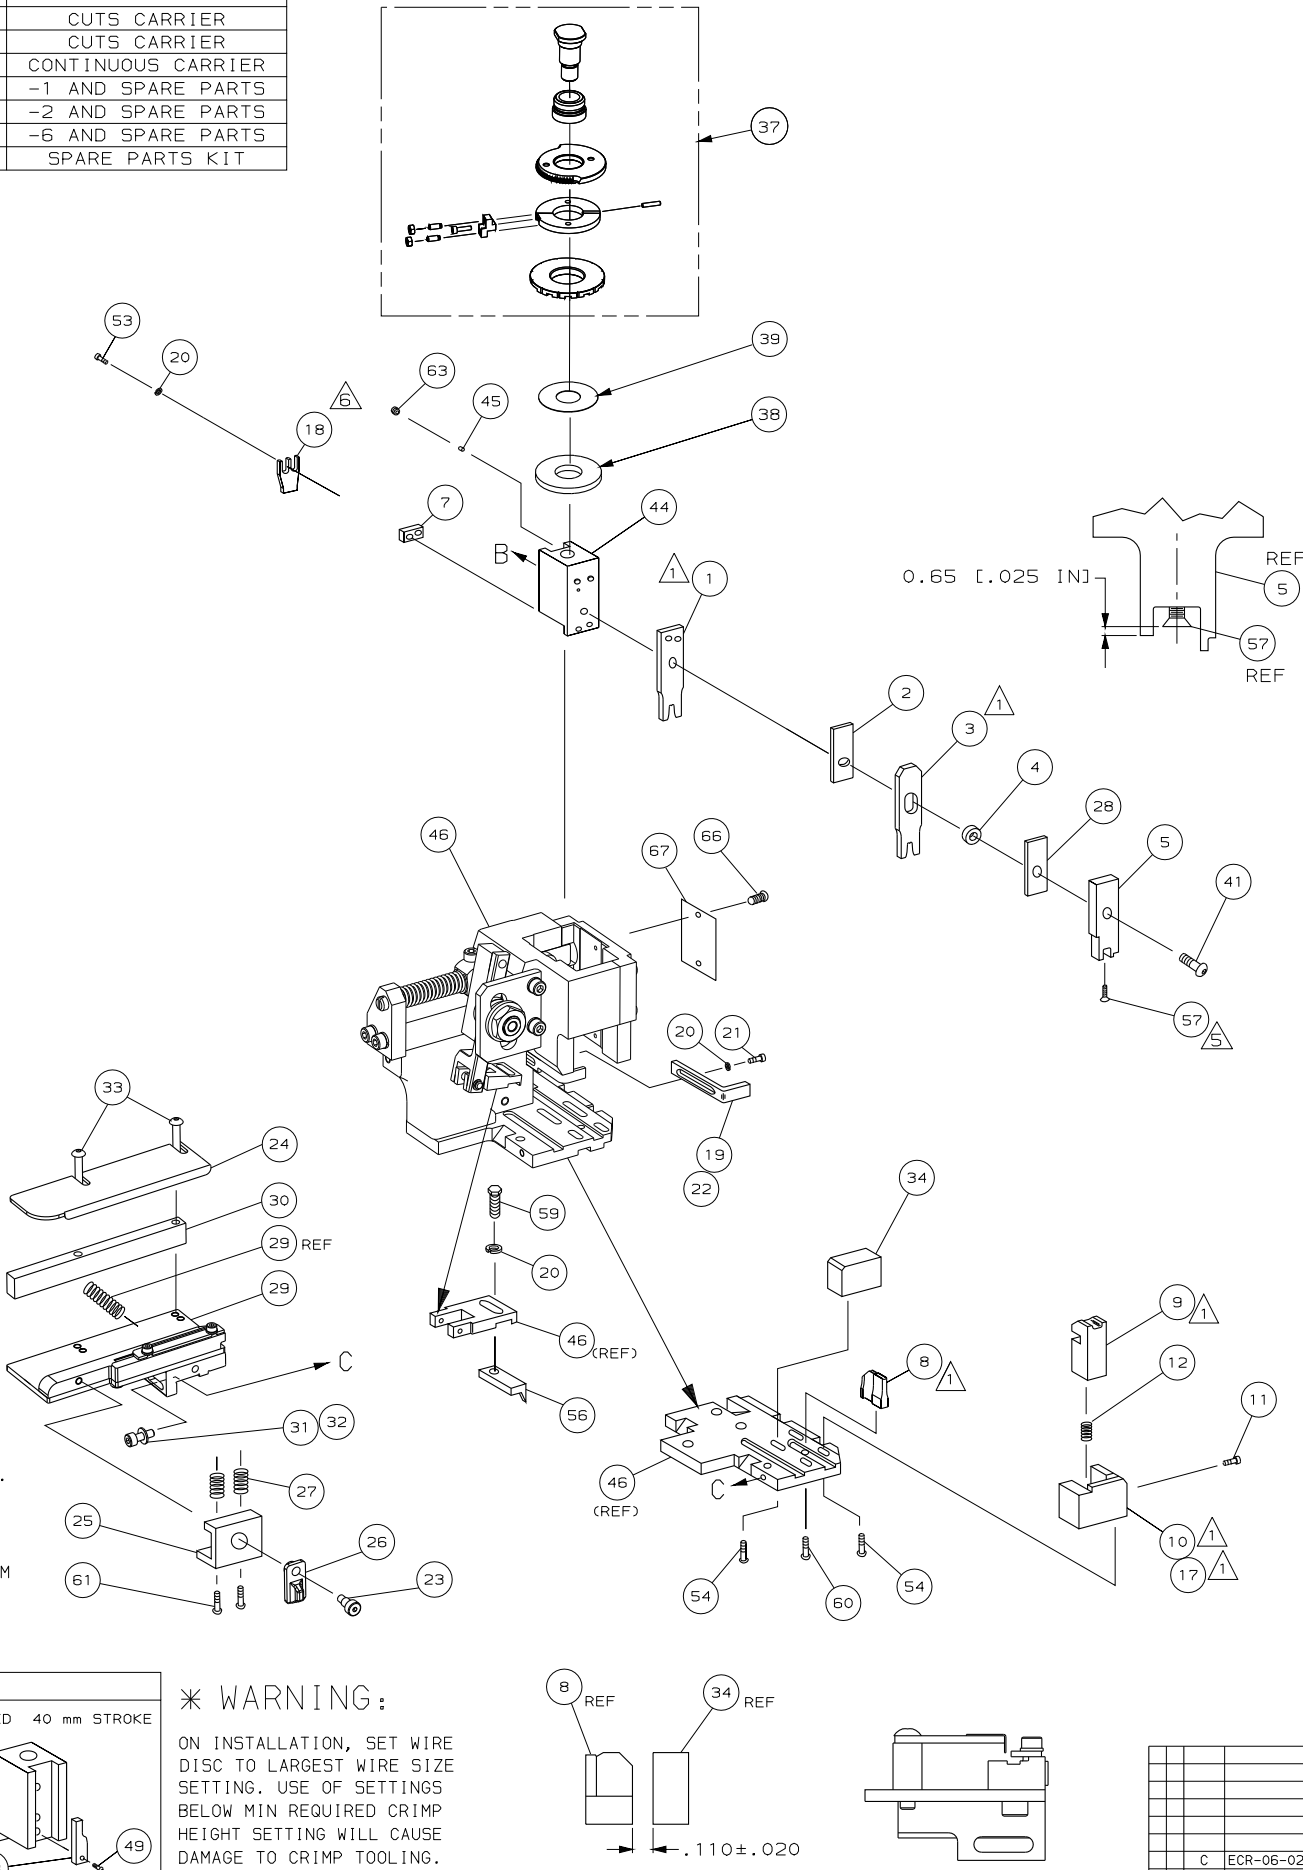

1528227 1528227

/nd/mbaum/medout

-	1	1	1	1	1	1	1528227	PRINT, APPLICATOR LOG SHEET	73
-	1	1	1	1	1	1	1338705-3	DOCUMENTATION PACKAGE	71
-	-	-	-	-	-	-	-	-	70
-	-	-	-	-	-	-	-	-	69
-	-	-	-	-	-	-	-	-	68
-	1	1	1	1	1	1	461264-5	PLATE, IDENTIFICATION	67
-	2	2	2	2	2	2	21017-2	SCR,DRIVE (#2x.19) ID PLATE	66
-	-	-	-	-	-	-	-	-	65
-	1	1	1	1	1	1	3-18031-0	SCR,SKT SET (M6X6) RAM	64
-	-	-	-	-	-	-	-	-	63
-	2	2	2	2	2	2	2-18032-5	SCR,SET (M5X20) DRAG	62
-	1	1	1	1	1	1	18024-7	SCR,BHC (M4X10) ANVIL	61
-	1	1	1	1	1	1	5-18022-2	SCR,HEX (M4X8) FEED FINGER	60
-	-	-	-	-	-	-	-	-	59
-	1	1	1	1	1	1	985575-3	SCR,FHC (M3X10) DEP	58
-	1	1	1	1	1	1	1338685-1	PAWL, FEED	57
-	-	-	-	-	-	-	-	-	56
-	4	4	4	4	4	4	18024-8	SCR,BHC (M4X12) SHEAR HOLDER	55
-	2	2	2	2	2	2	1-18023-1	SCR,SHC (M4X10) TERM HLD DWN	54
-	-	-	-	-	-	-	-	-	53
-	-	-	-	-	-	-	-	-	52
-	-	-	-	-	-	-	-	-	51
-	-	-	-	-	-	-	-	-	50
-	1	1	1	1	1	1	18024-3	SCR,BHC (M3X10) CAM	49
-	-	-	-	-	-	-	1338675-1	CAM, PRE FEED 30 & 40 mm ST	48
-	1	-	-	-	-	-	1338676-1	CAM, POST FEED 30 & 40 mm ST	47
-	1	1	1	1	1	1	1320999-3	APPLICATOR BASIC SUBASSY	46
-	1	1	1	1	1	1	690191-1	PLUG, NYLON	45
-	1	1	1	1	1	1	1338660-1	RAM	44
-	-	-	-	-	-	-	-	-	43
-	1	1	1	1	1	1	2-18024-6	SCR,BHC (M8X25) RAM	42
-	-	-	-	-	-	-	-	-	41
-	1	1	1	1	1	1	690125-1	SHIM SUBASSY	40
-	1	1	1	1	1	1	1-469367-0	SPACER, FINE ADJUST	39
-	1	1	1	1	1	1	879103-2	FINE ADJUST HEAD SUBASSY	38
-	-	-	-	-	-	-	-	-	37
-	-	-	-	-	-	-	-	-	36
-	-	-	-	-	-	-	-	-	35
-	1	1	1	1	1	1	1320934-3	SUPPORT, TERMINAL	34
-	2	2	2	2	2	2	1-18024-0	SCR,BHC (M4X20) STRIP GUIDE	33
-	1	1	1	1	1	1	18027-2	WASHER, FLAT (M4)	32
-	1	1	1	1	1	1	1-18023-2	SCR,SKT CAP (M4X12) MOUNT BLOCK	31
-	1	1	1	1	1	1	1320908-8	SPACER, STRIP GUIDE	30
-	1	1	1	1	1	1	1633073-1	STRIP GUIDE PLATE ASSY	29
-	1	1	1	1	1	1	1-455888-8	SPACER, FRONT SHEAR DEP	28
-	2	2	2	2	2	2	1-22284-0	SPRING, DRAG	27
-	1	1	1	1	1	1	356835-1	LEVER, DRAG RELEASE	26
-	1	1	1	1	1	1	240792-1	DRAG, TERMINAL	25
-	1	1	1	1	1	1	1320928-1	PLATE, STRIP GUIDE	24
-	1	1	1	1	1	1	980371-4	SCR,SHC SHLD	23
-	1	-	-	-	-	-	690472-2	STRIPPER	22
-	1	1	1	1	1	1	1-18023-1	SCR,SHC (M4X10) STRIPPER	21
-	4	4	4	4	4	4	18025-2	WASHER,LOCK (M4) STRIPPER	20
-	-	-	-	-	-	-	690472-1	STRIPPER	19
-	1	1	1	1	1	1	690518-2	HOLDER, TERMINAL	18
-	1	-	-	-	-	-	1338684-2	HOLDER, SHEAR, FRONT (NO-CUT)	17
-	-	-	-	-	-	-	-	-	16
-	-	-	-	-	-	-	-	-	15
-	-	-	-	-	-	-	-	-	14
-	-	-	-	-	-	-	-	-	13
-	1	1	1	1	1	1	3-22280-3	SPRING, SHEAR	12
-	1	1	1	1	1	1	356885-5	STOP, SHEAR	11
-	-	-	-	-	-	-	1-1320921-0	HOLDER, SHEAR, FRONT (CUT)	10
-	1	1	1	1	1	1	318707-1	SHEAR, FLOAT (FRONT)	9
-	1	2	2	2	1	1	6-1333204-7	ANVIL	8
-	1	1	1	1	1	1	240641-2	SPACER, DEPRESSOR (REAR)	7
-	-	-	-	-	-	-	-	-	6
-	1	1	1	1	1	1	1338680-1	DEPRESSOR, SHEAR (FRONT)	5
-	1	1	1	1	1	1	238011-2	SPACER, BLOCK CRIMPER	4
-	1	2	2	2	1	1	1-562244-2	CRIMPER, INSULATION	3
-	1	1	1	1	1	1	455888-6	SPACER, CRIMPER	2
-	1	2	2	2	1	1	2-562108-8	CRIMPER, WIRE	1
-77	-76	-72	-71	-6	-2	-1	PART NO	DESCRIPTION	ITEM NO
-	-	-	-	-	-	-	REVISION OF EACH ASSY NO (WHEN BLANK, USE DWG REVISION)		
QTY REQD PER ASSY							PARTS LIST		
DO NOT SCALE PRINT.							MATL	HT TR	FIN
TOLERANCES UNLESS OTHERWISE SPECIFIED:							DR	04AUG03	APP
1 PLC DEC ±-							M.CLIFFORD	04AUG03	F.BACKHURST
2 PLC DEC ±-							CHK	REL	02-04-04
3 PLC DEC ±-							-	M.CLIFFORD	M.CLIFFORD
ANGLES ±-							NAME		
SURF TEXTURE, REMOVE BURRS, BREAK SHARP EDGES RO.38 MAX							FINE ADJ SIDE FD HD-1 APPL		
SCALE							DWG NO	1528227	SHEET
CUSTOMER AND ASSEMBLY DRAWING							1 of 1		
REV C							RESTRICTED TO		

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9