


MCR716, MCR718

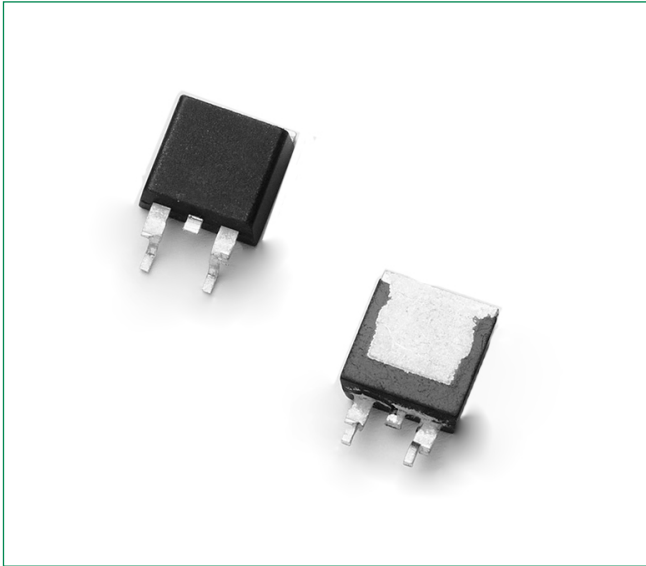


Description

Designed for high volume, low cost, industrial and consumer applications such as motor control; process control; temperature, light and speed control.

Features

- Small Size
- Passivated Die for Reliability and Uniformity
- Low Level Triggering and Holding Characteristics
- Epoxy Meets UL 94 V-0 @ 0.125 in
- ESD Ratings: Human Body Model, 3B > 8000 V
Machine Model, C > 400 V
- Pb-Free Packages are Available

Pin Out

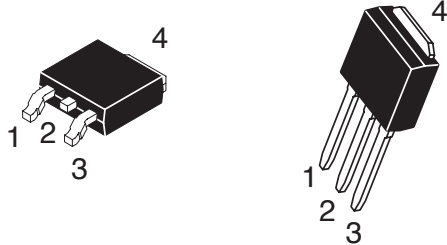

Functional Diagram



Additional Information



[Datasheet](#)



[Resources](#)



[Samples](#)

Maximum Ratings ($T_J = 25^\circ\text{C}$ unless otherwise noted)

| Rating | Symbol | Value | Unit |
|---|--------------------------------------|-------------|--------------------|
| Peak Repetitive Off-State Voltage (Note 1) ($T_J = -40$ to 125°C , Sine Wave, 50 to 60 Hz, Gate Open) | V_{DRM} V_{RRM} | 400 600 | V |
| | MCR716 MCR718 | | |
| On-State RMS Current (All Conduction Angles; $T_C = 90^\circ\text{C}$) | $I_{\text{T (RMS)}}$ | 4.0 | A |
| Average On-State Current (180° Conduction Angles; $T_C = 90^\circ\text{C}$) | $I_{\text{T(AV)}}$ | 2.6 | A |
| Peak Non-Repetitive Surge Current (1/2 Cycle, Sine Wave 60 Hz, $T_J = 110^\circ\text{C}$) | I_{TSM} | 25 | A |
| Circuit Fusing Consideration ($t = 8.3$ ms) | I^2t | 2.6 | A ² sec |
| Forward Peak Gate Power (Pulse Width ≤ 10 . μsec , $T_C = 90^\circ\text{C}$) | P_{GM} | 0.5 | W |
| Forward Average Gate Power ($t = 8.3$ msec, $T_C = 90^\circ\text{C}$) | $P_{\text{GM (AV)}}$ | 0.1 | W |
| Forward Peak Gate Current (Pulse Width ≤ 1.0 μsec , $T_C = 90^\circ\text{C}$) | I_{GM} | 0.2 | A |
| Operating Junction Temperature Range | T_J | -40 to +110 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{stg} | -40 to +150 | $^\circ\text{C}$ |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. V_{DRM} and V_{RRM} for all types can be applied on a continuous basis. Ratings apply for zero or negative gate voltage; however, positive gate voltage shall not be applied concurrent with negative potential on the anode. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.

Thermal Characteristics

| Rating | Symbol | Value | Unit |
|---|-----------------------|-------|--------------------|
| Thermal Resistance, Junction-to-Case | $R_{\theta\text{JC}}$ | 3.0 | $^\circ\text{C/W}$ |
| Thermal Resistance, Junction-to-Ambient (Note 2) | $R_{\theta\text{JA}}$ | 80 | |
| Maximum Lead Temperature for Soldering Purposes 1/8" from Case for 10 Seconds | T_L | 260 | $^\circ\text{C}$ |

Electrical Characteristics - OFF ($T_J = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | | Symbol | Min | Typ | Max | Unit |
|--|---------------------------|-----------|-----|-----|-----|---------------|
| Peak Repetitive Forward or Reverse Blocking Current (Note 3) ($V_{AK} = \text{Rated } V_{DRM}$ or V_{RRM} , $R_{GK} = 1.0 \text{ k}\Omega$) | $T_J = 25^\circ\text{C}$ | I_{DRM} | - | - | 10 | μA |
| | $T_J = 110^\circ\text{C}$ | I_{RRM} | - | - | 200 | |

Electrical Characteristics - ON ($T_J = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | | Symbol | Min | Typ | Max | Unit |
|---|--|-----------|-----|------|-----|---------------|
| Peak Reverse Gate Blocking Voltage ($I_{GR} = 10 \mu\text{A}$) | | V_{GRM} | 10 | 12.5 | 18 | V |
| Peak Reverse Gate Blocking Current ($V_{GR} = 10 \text{ V}$) | | I_{RGM} | - | - | 1.2 | μA |
| Peak Forward On–State Voltage (Note 4) | ($I_{TM} = 5.0 \text{ A Peak}$) | V_{TM} | - | 1.3 | 1.5 | V |
| | ($I_{TM} = 8.2 \text{ A Peak}$) | | - | 1.5 | 2.2 | |
| Gate Trigger Current (Continuous dc) (Note 5) ($V_{AK} = 12 \text{ Vdc}$, $R_L = 30 \Omega$) | ($T_J = 25^\circ\text{C}$) | I_{GT} | 1.0 | 25 | 75 | μA |
| | ($T_J = -40^\circ\text{C}$) | | - | - | 300 | |
| Gate Trigger Voltage (Continuous dc) ($V_D = 12 \text{ V}_{DC}$, $R_L = 30 \Omega$) (Note 5) | ($T_J = 25^\circ\text{C}$) | V_{GT} | 0.3 | 0.55 | 0.8 | V |
| | ($T_J = -40^\circ\text{C}$) | | - | - | 1.0 | |
| | ($T_J = 110^\circ\text{C}$) | | 0.2 | - | - | |
| Holding Current ($V_D = 12 \text{ V}$, Initiating Current = 200 mA, $R_{GK} = 1 \text{ k}\Omega$) | ($T_J = 25^\circ\text{C}$) | I_H | 0.4 | 1.0 | 5.0 | mA |
| | ($T_J = -40^\circ\text{C}$) | | - | - | 10 | |
| Latching Current | ($V_D = 12 \text{ V}_{DC}$, $I_G = 2.0 \text{ mA}$, $T_c = 25^\circ\text{C}$) | I_L | - | - | 5.0 | mA |
| | ($V_D = 12 \text{ V}_{DC}$, $I_G = 2.0 \text{ mA}$, $T_c = -40^\circ\text{C}$) | | - | - | 10 | |
| Total Turn–On Time (Source Voltage = 12 V, $R_S = 6.0 \text{ k}\Omega$, $I_T = 8 \text{ A(pk)}$, $R_{GK} = 1.0 \text{ k}\Omega$) ($V_D = \text{Rated } V_{DRM}$, Rise Time = 20 ns, Pulse Width = 10 μs) | | tgt | - | 2.0 | 5.0 | μs |

Dynamic Characteristics

| Characteristic | Symbol | Min | Typ | Max | Unit |
|--|--------|-----|-----|-----|------------------|
| Critical Rate of Rise of Off–State Voltage ($V_D = 0.67 \times \text{Rated } V_{DRM}$, Exponential Waveform, $R_{GK} = 1.0 \text{ k}\Omega$, $T_J = 110^\circ\text{C}$) | dv/dt | 5.0 | 10 | - | V/ μs |
| Critical Rate of Rise of On–State Current ($I_{PK} = 50 \text{ A}$, $P_w = 40 \text{ sec}$, $diG/dt = 1 \text{ A/sec}$, $I_{gt} = 50 \text{ mA}$) | di/dt | - | - | 100 | A/ μs |

2. Case 369C, when surface mounted on minimum recommended pad size.

3. Ratings apply for negative gate voltage or $R_{GK} = 1.0 \text{ k}\Omega$. Devices shall not have a positive gate voltage concurrently with a negative voltage on the anode. Devices should not be tested with a constant current source for forward and reverse blocking capability such that the voltage applied exceeds the rated blocking voltage.

4. Pulse Test; Pulse Width $\leq 2.0 \text{ msec}$, Duty Cycle $\leq 2\%$.

5. R_{GK} current not included in measurements.

Voltage Current Characteristic of SCR

| Symbol | Parameter |
|-----------|---|
| V_{DRM} | Peak Repetitive Forward Off State Voltage |
| I_{DRM} | Peak Forward Blocking Current |
| V_{RRM} | Peak Repetitive Reverse Off State Voltage |
| I_{RRM} | Peak Reverse Blocking Current |
| V_{TM} | Maximum On State Voltage |
| I_H | Holding Current |

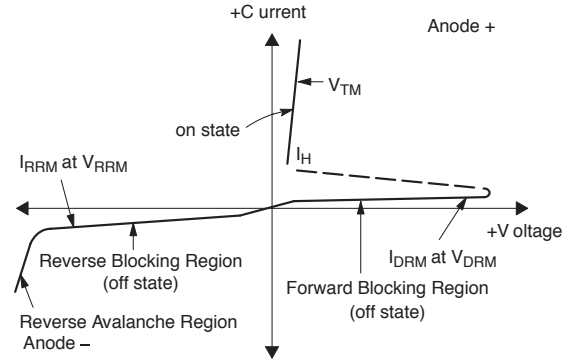


Figure 1. RMS Current Derating

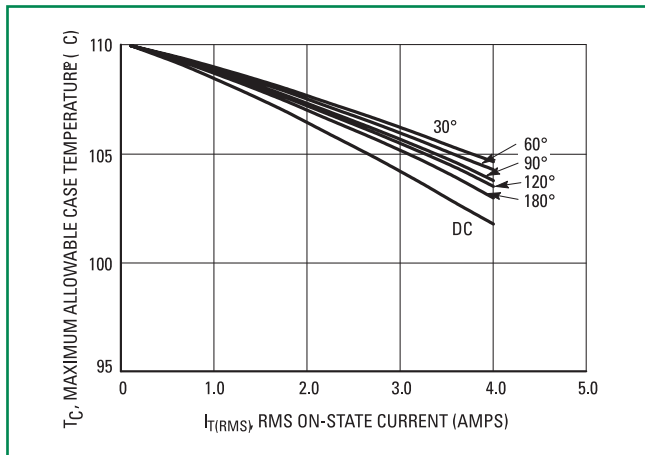


Figure 2. On-State Power Dissipation

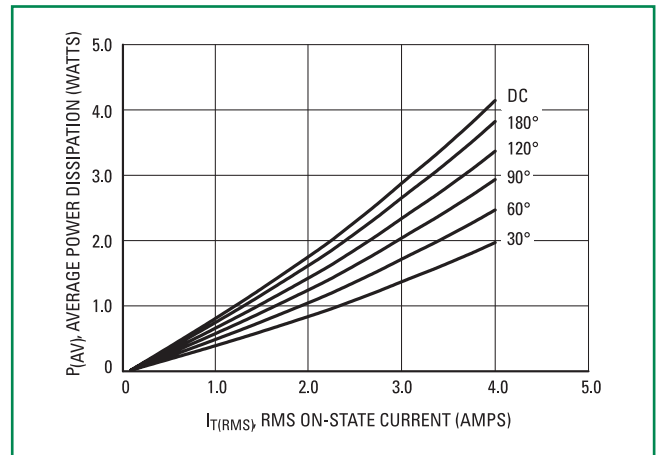


Figure 3. On-State Characteristics

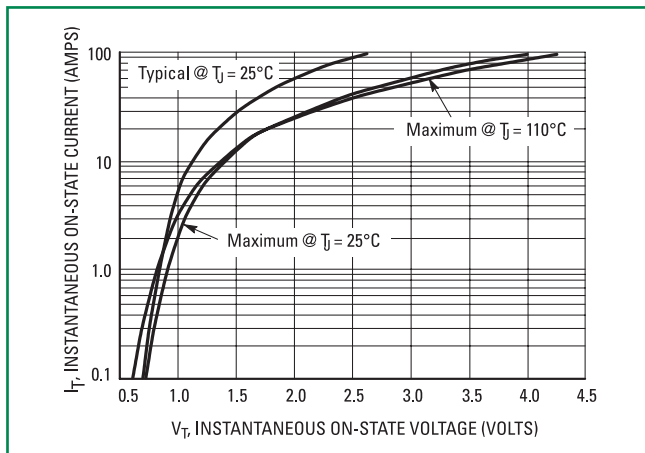


Figure 4. Transient Thermal Response

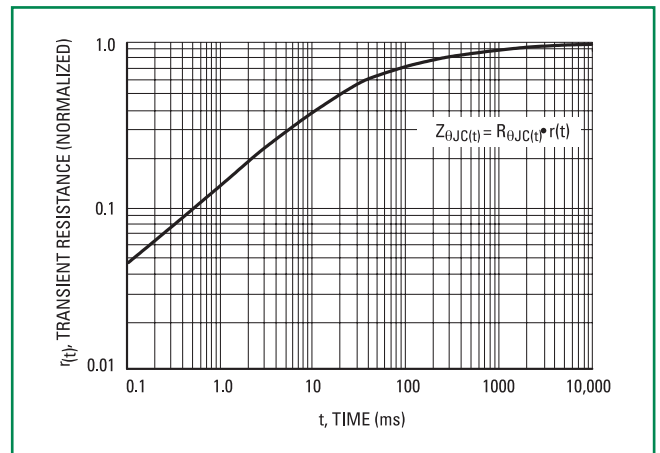


Figure 5. Typical Gate Trigger Current vs Junction Temperature

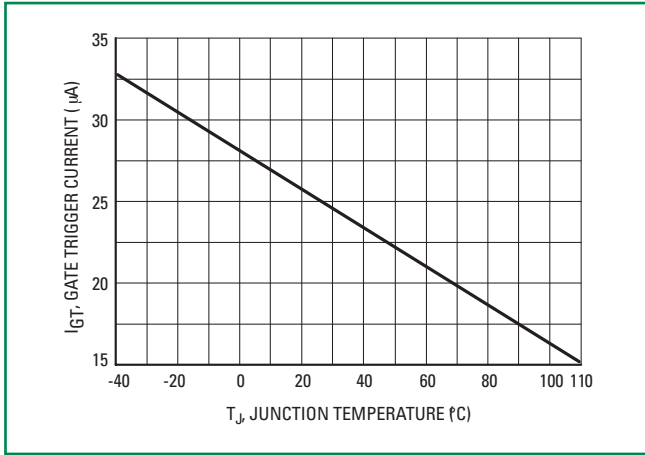


Figure 6. Typical Gate Trigger Voltage vs Junction Temperature

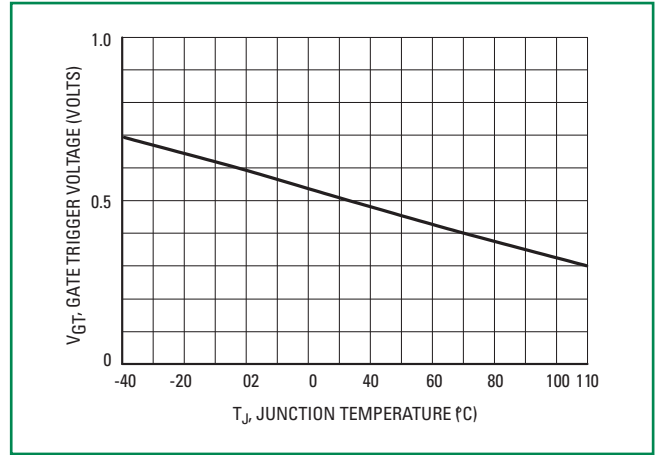


Figure 7. Typical Holding Current vs Junction Temperature



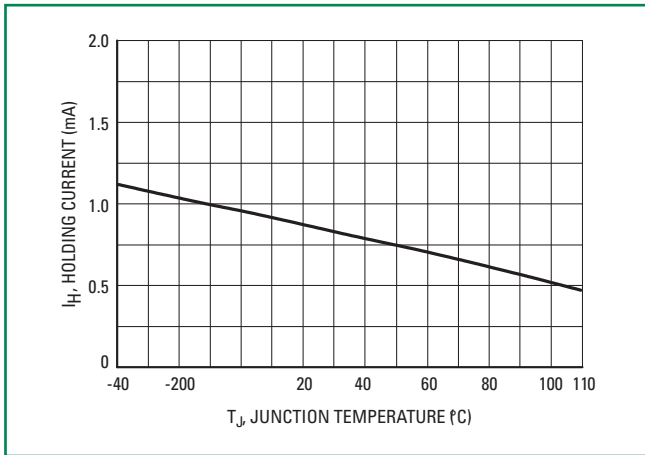



Figure 8. Typical Latching Current vs Junction Temperature

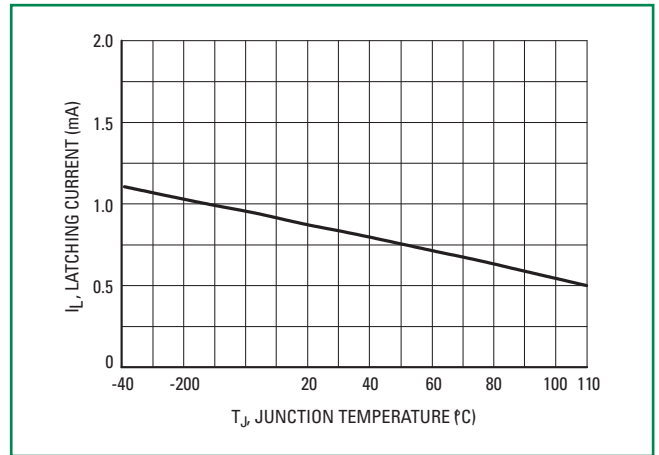


Dimensions

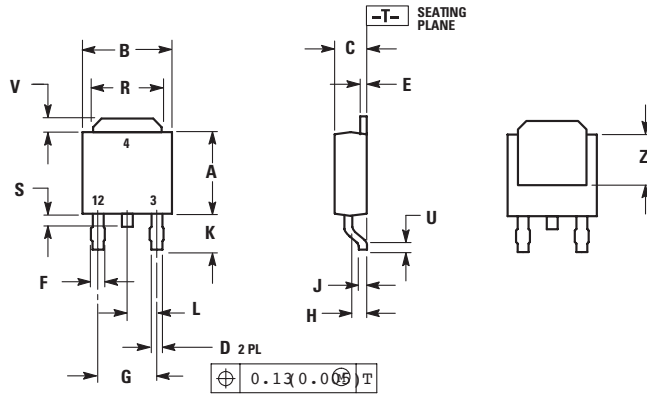

Soldering Footprint

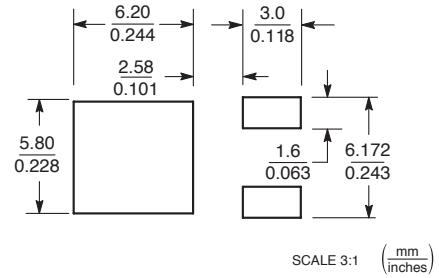

Part Marking System

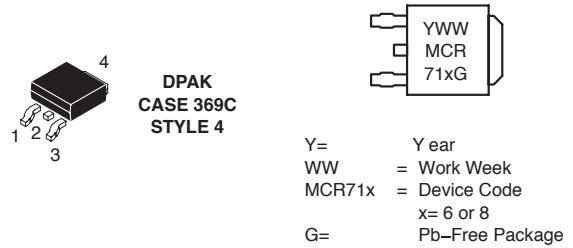

| Dim | Inches | | Millimeters | |
|-----|-----------|-------|-------------|------|
| | Min | Max | Min | Max |
| A | 0.235 | 0.245 | 5.97 | 6.22 |
| B | 0.250 | 0.265 | 6.35 | 6.73 |
| C | 0.086 | 0.094 | 2.19 | 2.38 |
| D | 0.027 | 0.035 | 0.69 | 0.88 |
| E | 0.018 | 0.023 | 0.46 | 0.58 |
| F | 0.037 | 0.045 | 0.94 | 1.14 |
| G | 0.180 BSC | | 4.58 BSC | |
| H | 0.034 | 0.040 | 0.87 | 1.01 |
| J | 0.018 | 0.023 | 0.46 | 0.58 |
| K | 0.102 | 0.114 | 2.60 | 2.89 |
| L | 0.090 BSC | | 2.29 BSC | |
| R | 0.180 | 0.215 | 4.57 | 5.45 |
| S | 0.025 | 0.040 | 0.63 | 1.01 |
| U | 0.020 | --- | 0.51 | --- |
| V | 0.035 | 0.050 | 0.89 | 1.27 |
| Z | 0.155 | --- | 3.93 | --- |

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

Pin Assignment

| | |
|---|---------|
| 1 | Cathode |
| 2 | Anode |
| 3 | Gate |
| 4 | Anode |

Ordering Information

| Device | Package | Shipping |
|-----------|-------------------|-----------------------|
| MCR716T4 | DPAK | 2500 / Tape & Reel |
| MCR716T4G | DPAK (Pb-Free) | |
| MCR718T4 | DPAK | |
| MCR718T4G | DPAK (Pb-Free) | |

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littelfuse.com/disclaimer-electronics

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9