
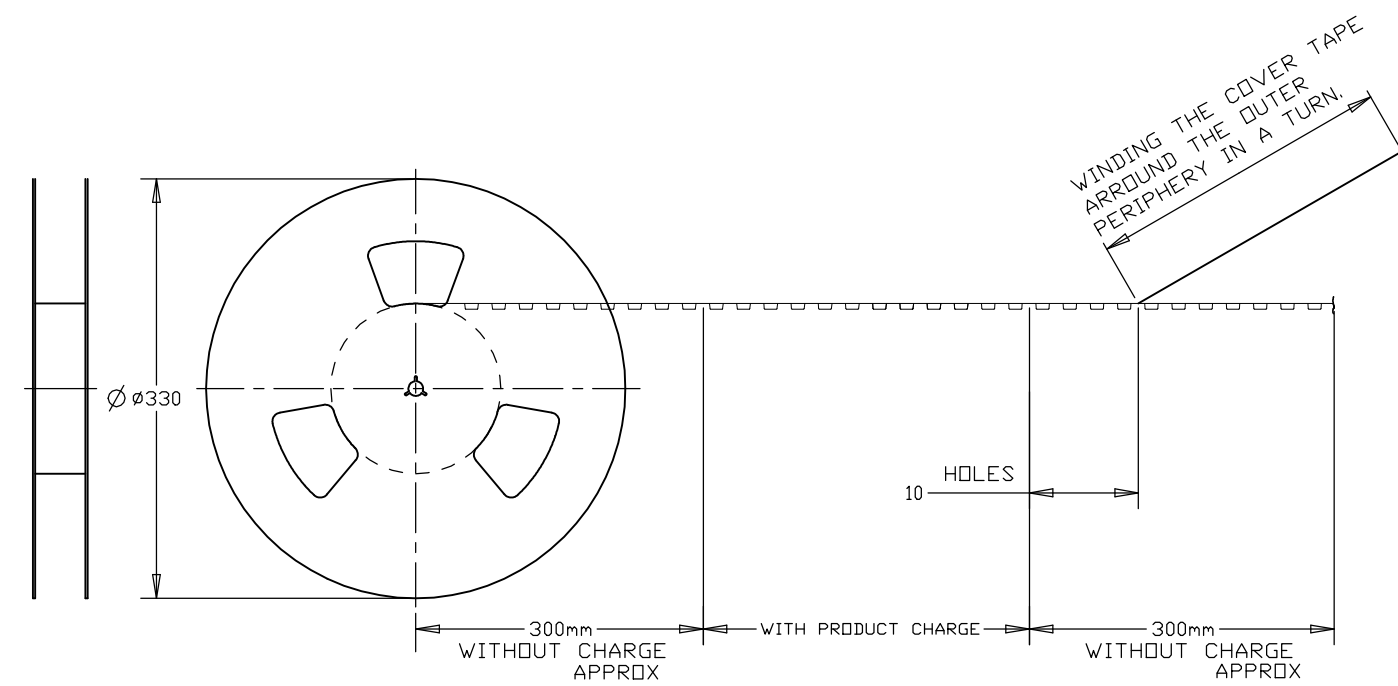
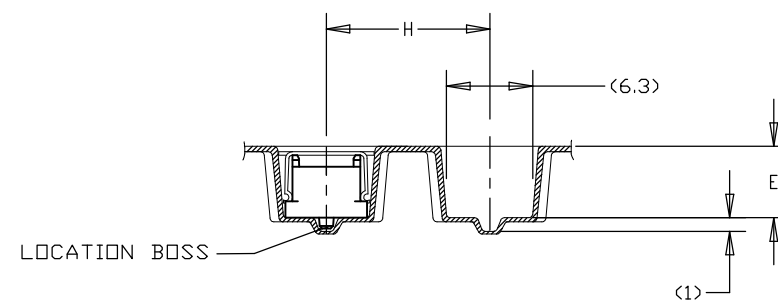
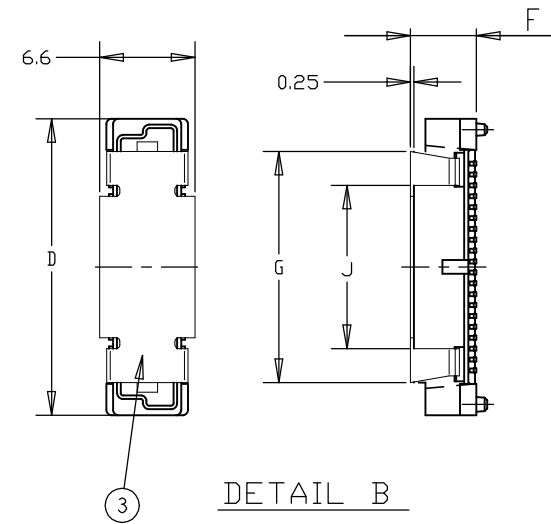


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
F1		REVISED PER ECO-18-001257	03JAN2018	R.L	H.L

Notes:

- 1 CUTOUT FEATURE AVAILABLE ONLY ON 5H ASSY P/N -1 (40P) AND -2 (60P).
- 6 0.00038 MIN GOLD PLATING (15u INCHES GOLD PLATING)
- 3 CONNECTOR DIMENSIONS REFERENCED FROM DRAWING WHICH CONN. P/NS BASED
- 4 CONNECTOR WITH BLACK HOUSING
- 5 MATERIAL: HOUSING: L.C.P UL 94-V0. CONTACT: BRASS

LOW HALOGEN

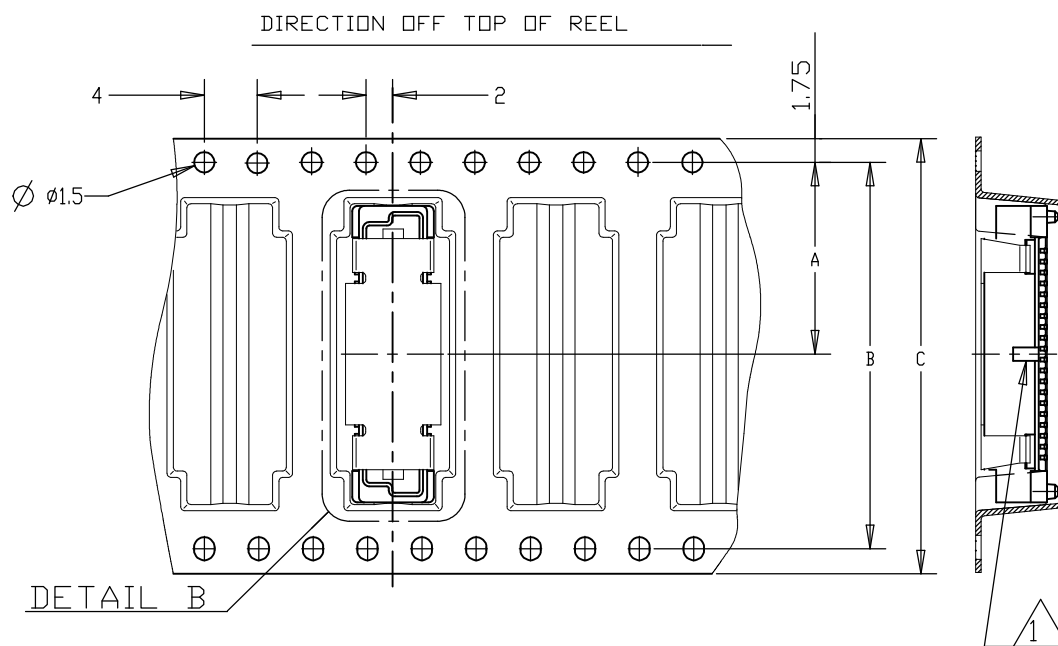

0.00076 MIN GOLD PLATING (30u INCHES GOLD PLATING)											61.8	88	84.4	42.2	140	7-	-6	
	450										53.8				120	7-	-5	
											45.8	72	68.4	34.2	100	7-	-4	
											37.8	56	52.4	26.2	80	7-	-3	
											29.8	44	40.4	20.2	60	7-	-2	
	700	7H	3.6	6.6		12		6.85	7.25	21.8	32	28.4	14.2	40	7-5177986-1			
											69.8				160	6-	-8	
											61.8	88	84.4	42.2	140	6-	-6	
											53.8				120	6-	-5	
											45.8	72	68.4	34.2	100	6-	-4	
											37.8	56	52.4	26.2	80	6-	-3	
											29.8	44	40.4	20.2	60	6-	-2	
0.00076 MIN GOLD PLATING (30u INCHES GOLD PLATING)	800	6H	2.6	5.6		12		5.85	6.25	21.8	32	28.4	14.2	40	6-5177986-1			
											85.8	104	100.4	50.2	200	5-	-0	
											69.8				160	5-	-8	
											61.8	88	84.4	42.2	140	5-	-6	
											53.8				120	5-	-5	
											45.8	72	68.4	34.2	100	5-	-4	
											37.8	56	52.4	26.2	80	5-	-3	
											29.8	44	40.4	20.2	60	5-	-2	
	900	5H	1.2	4.6	12	12	17	4.85	5.25	21.8	32	28.4	14.2	40	5-5177986-1			
											37.8	56	52.4	26.2	80	8-5177986-3		
	450	7H	3.6	6.6	12	16	17	6.85	7.25	53.8	72	68.4	34.2	120	4-5177986-5			
											85.8				200	4-	-0	
0.00076 MIN GOLD PLATING (30u INCHES GOLD PLATING)											77.8	104	100.4	50.2	180	3-	-9	
											69.8				160	3-	-8	
											61.8	88	84.4	42.2	140	3-	-6	
											53.8				120	3-	-5	
											45.8	72	68.4	34.2	100	3-	-4	
											37.8	56	52.4	26.2	80	3-	-3	
											29.8	44	40.4	20.2	60	3-	-2	
	600	8H	4.6	7.6		12		7.85	8.25	21.8	32	28.4	14.2	40	3-5177986-1			
											85.8				200	3-	-0	
											77.8	104	100.4	50.2	180	2-	-9	
											69.8				160	2-	-8	
											61.8	88	84.4	42.2	140	2-	-6	
										53.8				120	2-	-5		
0.0002 MIN GOLD PLATING (7.8u INCHES GOLD PLATING)											45.8	72	68.4	34.2	100	2-	-4	
											37.8	56	52.4	26.2	80	2-	-3	
											29.8	44	40.4	20.2	60	2-	-2	
	450									21.8	32	28.4	14.2	40	2-5177986-1			
										21.8	32	28.4	14.2	40	2-5177986-0			
	700									61.8	88	84.4	42.2	140	1-	-6		
										53.8				120	1-	-5		
										45.8	72	68.4	34.2	100	1-	-4		
										37.8	56	52.4	26.2	80	1-	-3		
										29.8	44	40.4	20.2	60	1-	-2		
	800	6H	2.6	5.6		12		5.85	6.25	21.8	32	28.4	14.2	40	1-5177986-1			
											69.8				160		-8	
0.0002 MIN GOLD PLATING (7.8u INCHES GOLD PLATING)											61.8	88	84.4	42.2	140		-6	
											53.8				120		-5	
											45.8	72	68.4	34.2	100		-4	
											37.8	56	52.4	26.2	80		-3	
											29.8	44	40.4	20.2	60		-2	
	900	5H	1.2	4.6	12	12	17	4.85	5.25	21.8	32	28.4	14.2	40	5177986-1			
	EMARKS	QTY	HEIGHT TYPE	Y	X	J	H	G	F	E	D	C	B	A	POS	SALEABLE PART NO.		

STEEL COVER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN FLORENCE TAN 30AUG2004	TE Connectivity		
		CHK ERIC TNG 30MAY2012			
		APVD SF LEONG 30MAY2012	NAME		
DIMENSIONS: mm		PRODUCT SPEC	PLUG ASSEMBLY, FH 0.8 ON TAPING (EMBOSS) 0.5 BOSS LENGTH		
		APPLICATION SPEC			
MATERIAL		WEIGHT	SIZE	CAGE CODE	DRAWING NO
		0	A2	00779	C=5177986
FINISH		CUSTOMER DRAWING	SCALE	SHEET	REV
			1:1	1 OF 3	F1

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - TE Connectivity





ALL RIGHTS RESERVED.

LOW HALOGEN

Notes:

6 0.0002 MIN GOLD PLATING
(7.8u INCHES GOLD PLATING)


DIRECTION OFF TOP OF REEL

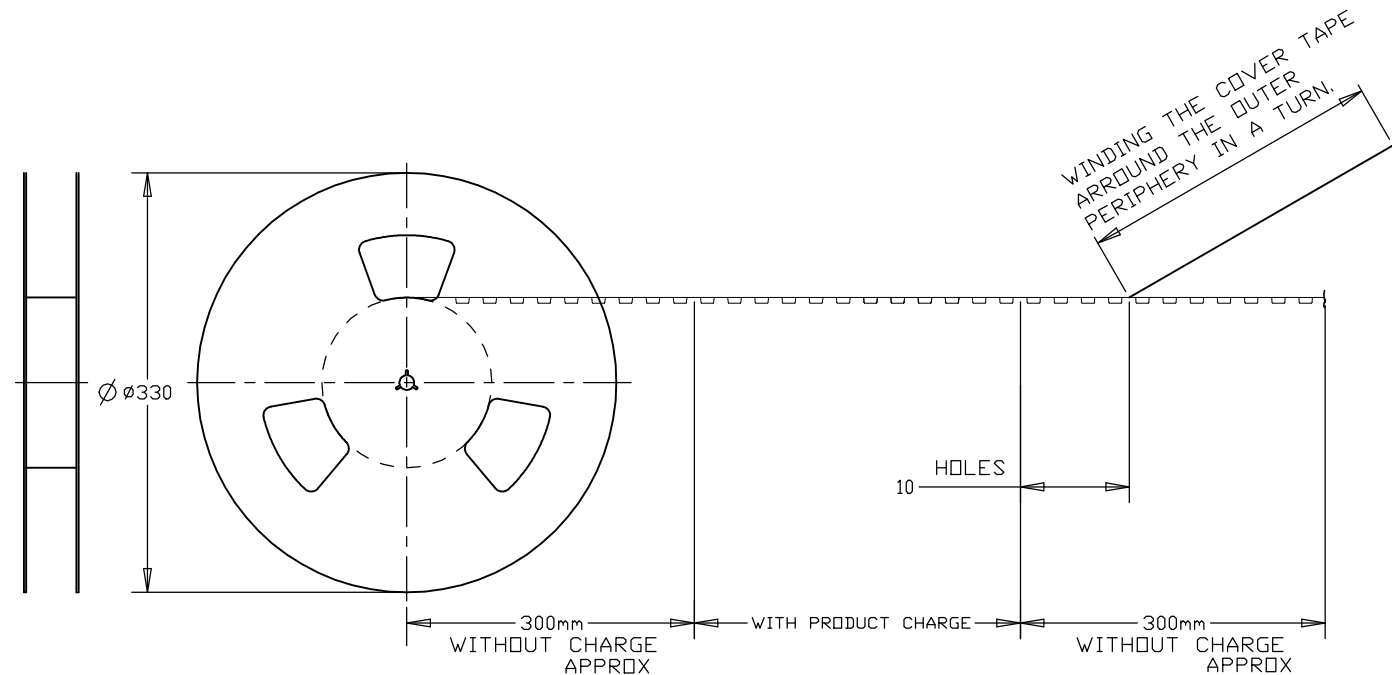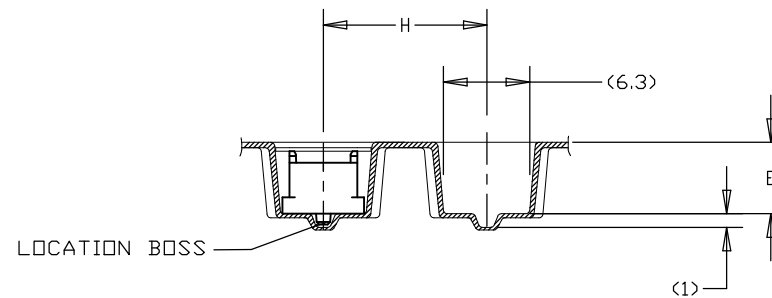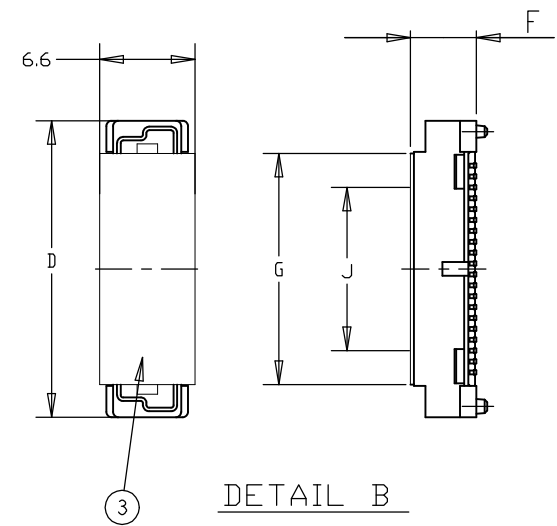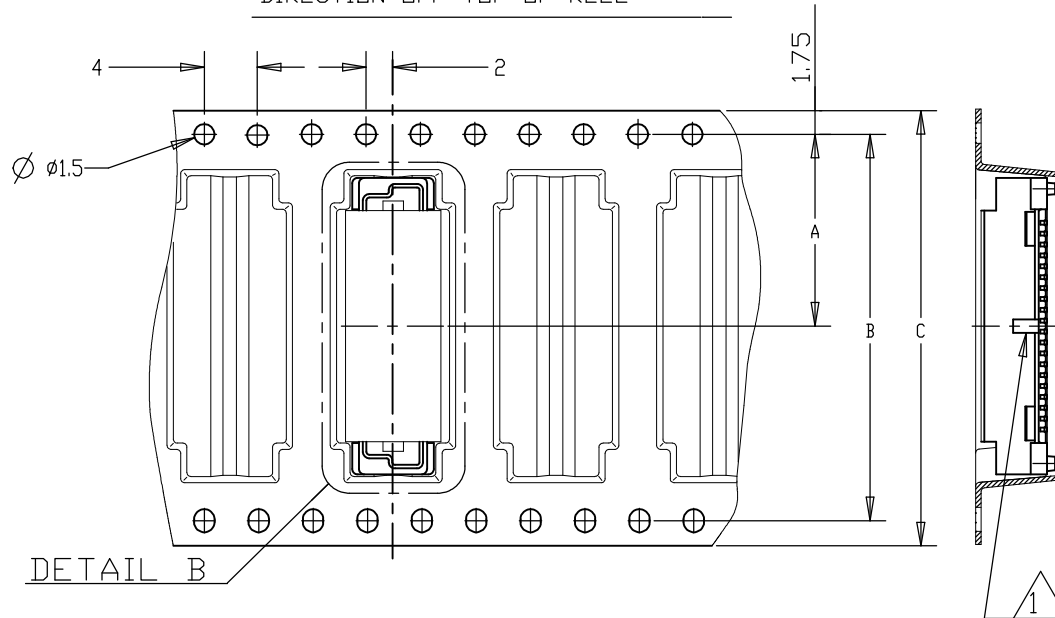

POLYIMIDE COVER

REMARKS	QTY	HEIGHT TYPE	J	H	G	F	E	D	C	B	A	POS	9-5177986-6	SALEABLE PART NO.
---------	-----	-------------	---	---	---	---	---	---	---	---	---	-----	-------------	-------------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN FLORENCE TAN 30AUG2004	 TE Connectivity	
DIMENSIONS: mm		CHK ERIC TNG 30MAY2012		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD SF LEONG 30MAY2012	NAME	
0 PLC ± -		PRODUCT SPEC	PLUG ASSEMBLY, FH 0.8 ON TAPING (EMBOSS) 0.5 BOSS LENGTH	
1 PLC ± 0.2		APPLICATION SPEC		
2 PLC ± 0.15		WEIGHT	SIZE	CAGE CODE
3 PLC ± 0.1		0	A2	00779
4 PLC ± -		CUSTOMER DRAWING	DRAWING NO	RESTRICTED TO
ANGLES ± -			C=5177986	
FINISH			SCALE	SHEET
			1:1	2 OF 3
				REV
				F1

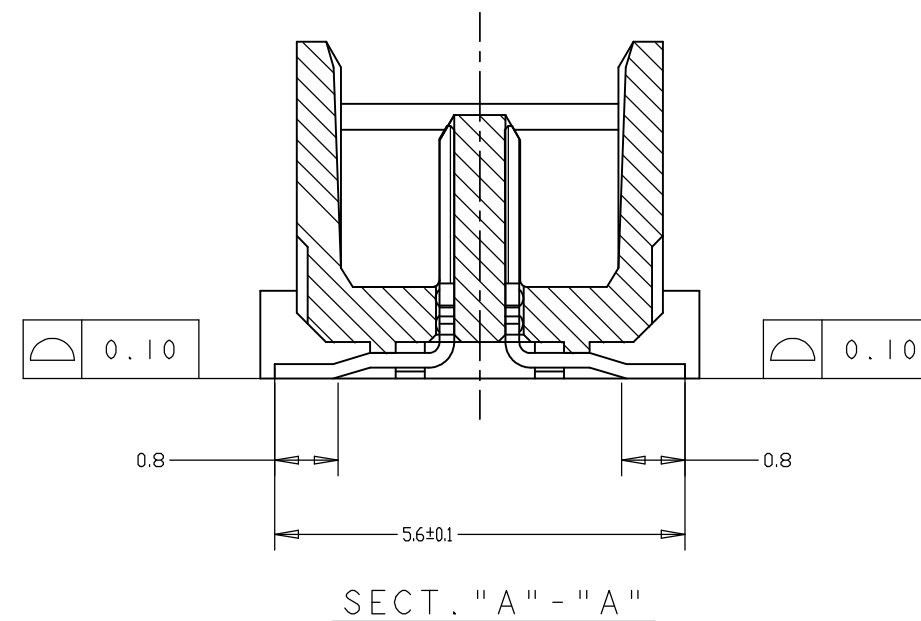

CONNECTOR ONLY

84.2	85.8	79.2	200
76.2	77.8	71.2	180
68.2	69.8	63.2	160
60.2	61.8	55.2	140
52.2	53.8	47.2	120
44.2	45.8	39.2	100
36.2	37.8	31.2	80
28.2	29.8	23.2	60
20.2	21.8	15.2	40
N	M	L	POS.

RECOMMENDED P.C. BOARD LAYOUT

LOW HALOGEN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN FLORENCE TAN		30AUG2004		 TE Connectivity	
		CHK ERIC TNG		30MAY2012			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 30MAY2012		NAME	
		0 PLC ± —		SF LEONG		PLUG ASSEMBLY, FH 0.8 ON TAPING (EMBOSS) 0.5 BOSS LENGTH —	
		1 PLC ± 0.2		PRODUCT SPEC			
		2 PLC ± 0.15		—			
		3 PLC ± 0.1		APPLICATION SPEC			
4 PLC ± —		—		SIZE		CAGE CODE	DRAWING NO
ANGLES FINISH		— ± —		WEIGHT 0		A2	
MATERIAL —		—		00779		C-5177986	
		CUSTOMER DRAWING		SCALE 1:1		SHEET 3 OF 3	
						REV F	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9