

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPERTY OF BEL/STEWART/TRP CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF TRP CONNECTOR.

PRODUCT MAY BE PROTECTED BY ONE OR MORE OF THE FOLLOWING US PATENTS:
5736910 5939955 6425781 6428361 6554638 6840817 7123117
7429195 7717749 7808751 6217391 6149050 7924130

REVISIONS				
#	LYR	DESCRIPTION	DATE	DWN APVD
E		EC-1805035	25MAY2018	JY TY
F		EC-1807016	11JUL2018	TRY TY
G		EC-1810004	08OCT2018	JY TY

1. MATERIALS:

- HOUSING: HIGH TEMPERATURE NYLON, BLACK, UL 94V-0
- SHIELD: 0.25mm THICK, BRASS PREPLATED WITH 0.76 um MIN SEMI-BRIGHT NICKEL;
- CONTACT TAILS: 0.20mm THICK, PHOSPHOR BRONZE, 1.27 um MIN OVERALL NICKEL UNDERPLATE, 3 um MIN TIN PLATE
- MOD JACK CONTACTS: 0.25mm THICK, PHOSPHOR BRONZE, 1.27 um MIN OVERALL NICKEL UNDERPLATE, WITH 1.27 um MIN LOCALIZED GOLD PLATE AT PLUG INTERFACE
- LIGHT EMITTING DIODE (LED): DIFFUSED EPOXY LENS, CARBON STEEL WIREFRAME PREPLATED WITH 2.03 um SILVER PLATE OVER 1.02 um NICKEL OVER 1.02 um COPPER UNDERPLATES; LEADS POST-PLATED WITH 3.05 um TIN.

2 RJ45 JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUB-PART F.

3. MAGNETICS

- APPLICATION: 10/100/1000 BASE-T
- IMPEDANCE: 100 Ω
- TURNS RATIO (CHIP:CABLE): 1:1 ALL FOUR PAIRS
- OPEN CIRCUIT INDUCTANCE (OCL): 350 uH MIN @100kHz, 0.1VRMS, 8mADC BIAS FROM 0 °C TO 70 °C, ALL FOUR PAIRS
- ALL FOUR PAIRS BI-DIRECTIONAL
- PERFORMANCE @ 25 °C:
 - INSERTION LOSS (IL): 1.1dB MAX FROM 0.5MHz TO 100MHz
 - RETURN LOSS (RL): 18dB MIN FROM 0.5MHz TO 40MHz
 - 12-20LOG(f/80)dB MIN FROM 40.1MHz TO 100MHz
 - CROSSTALK ATTENUATION: 35dB MIN FROM 0.5MHz TO 40MHz
 - 33-20LOG(f/50)dB MIN FROM 40.1MHz TO 100MHz
 - COMMON MODE REJECTION RATIO (CMRR): 30dB MIN FROM 0.5MHz TO 100MHz
- ISOLATION VOLTAGE:2250VDC (MAX) FOR 60 SECONDS WITH A RISE TIME OF 500V/SEC

4. OPERATING TEMPERATURE: FROM 0°C TO +70°C.

5. LEDS ARE DRIVEN WITH CONSTANT CURRENT AT APPROX 20 mA

LED COLOR: DOMINANT WAVELENGTH (λ D): GREEN 568 nm TYP @ IF=20 mA

FORWARD VOLTAGE (VF): GREEN 2.2V TYP @ IF=20 mA

LED COLOR: DOMINANT WAVELENGTH (λ D): YELLOW 588 nm TYP @ IF=20 mA

FORWARD VOLTAGE (VF): YELLOW 2.1V TYP @ IF=20 mA

LED COLOR: DOMINANT WAVELENGTH (λ D): ORANGE 605 nm TYP @ IF=20 mA

FORWARD VOLTAGE (VF): ORANGE 2.1V TYP @ IF=20 mA





6. ALL DIMENSIONS ARE NOMINAL UNLESS OTHERWISE NOTED.

7. TRADEMARK, PART NUMBER (DETAILED PART NUMBER REFER TO PART LIST), DATE CODE, COUNTRY OF ORIGIN, AND AGENCY APPROVAL MARKING IN APPROXIMATE LOCATION SHOWN

8. THESE PARTS ARE NOT DESIGNED FOR WAVE OR REFLOW SOLDERING APPLICATION


9. CONTACT LUBRICANT IN MATING AREA IS OPTIONAL

10. SUGGESTED PANEL OPENING DIMENSIONS ARE OPTIONAL

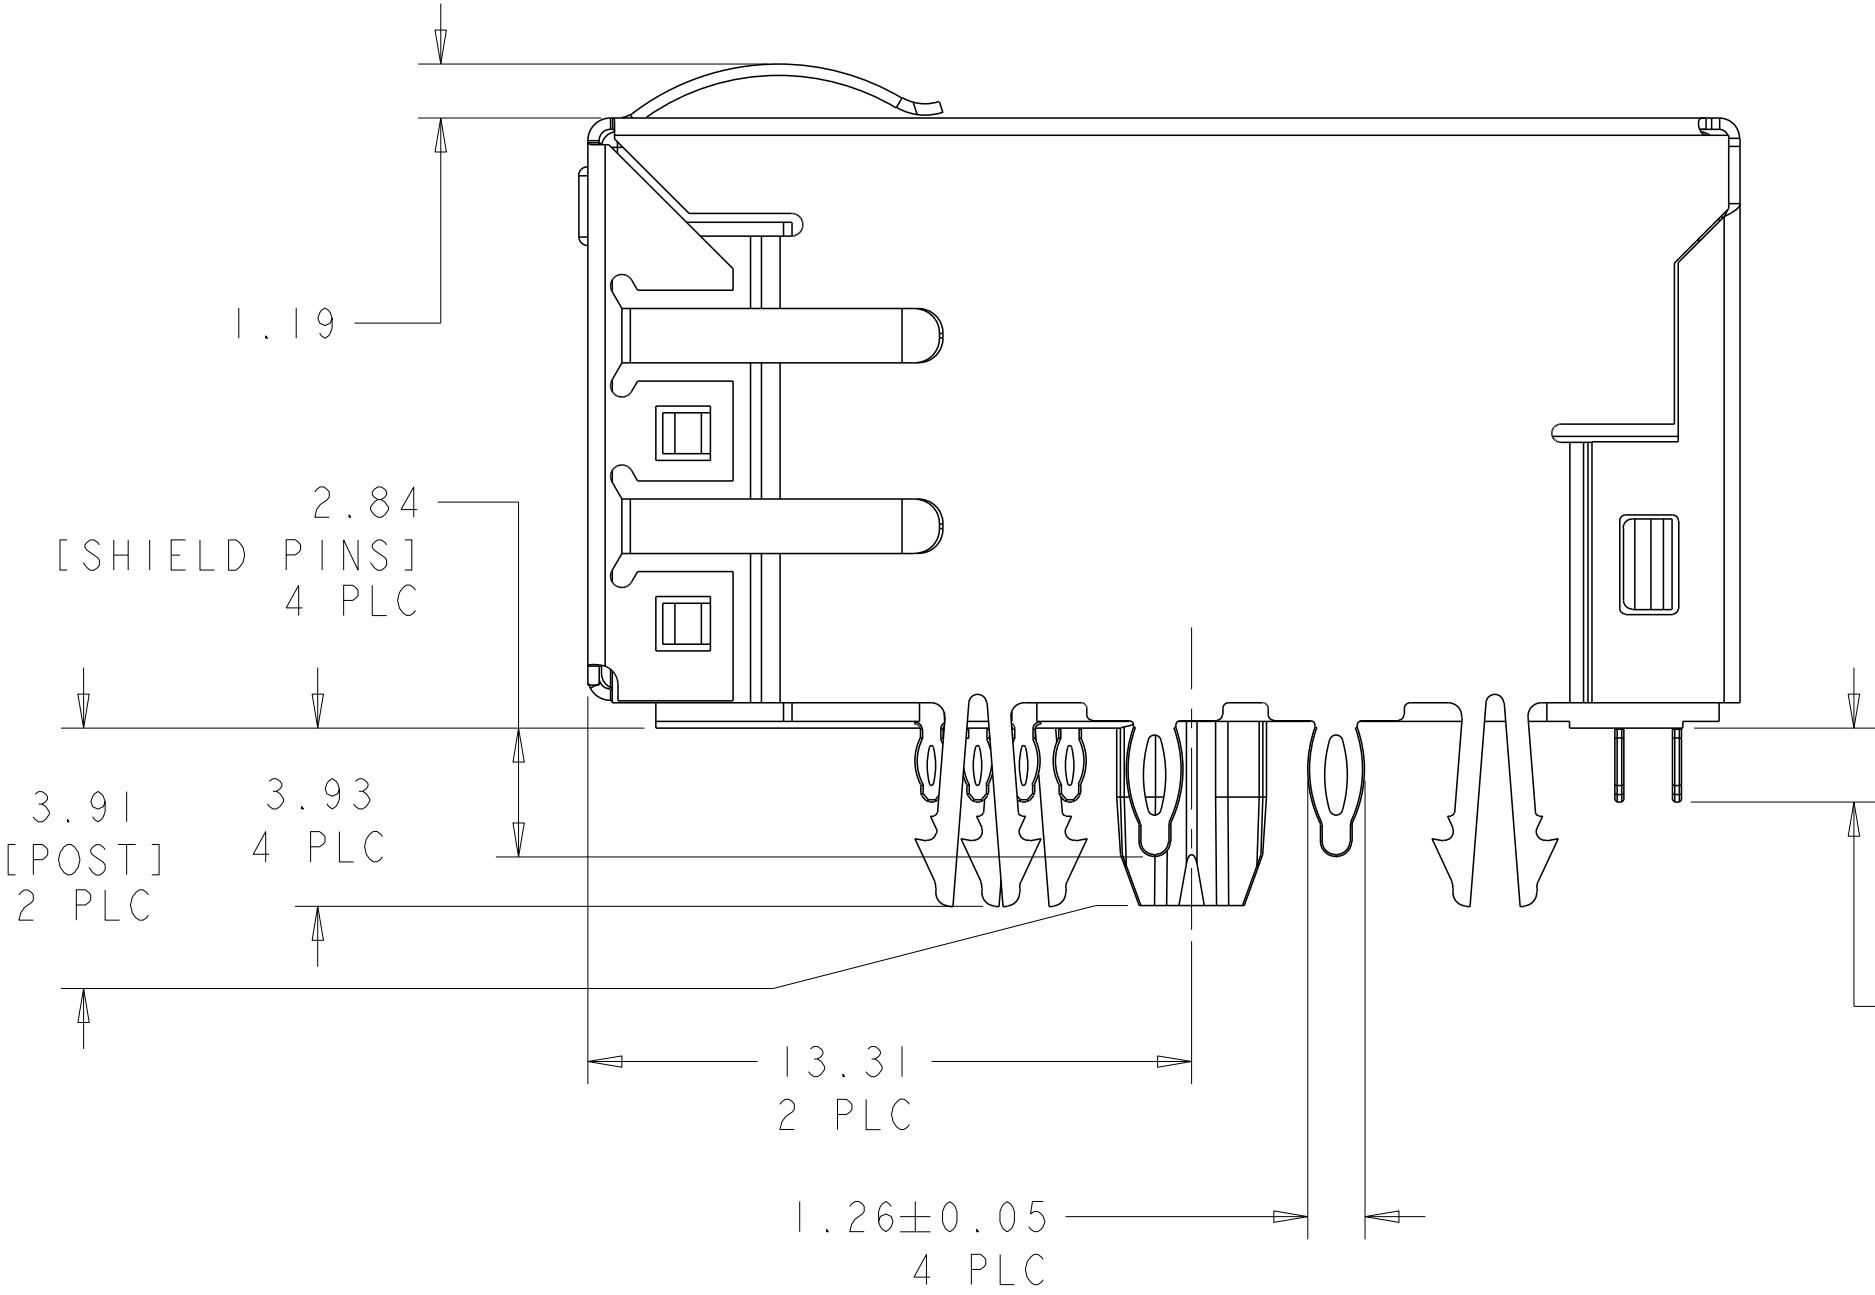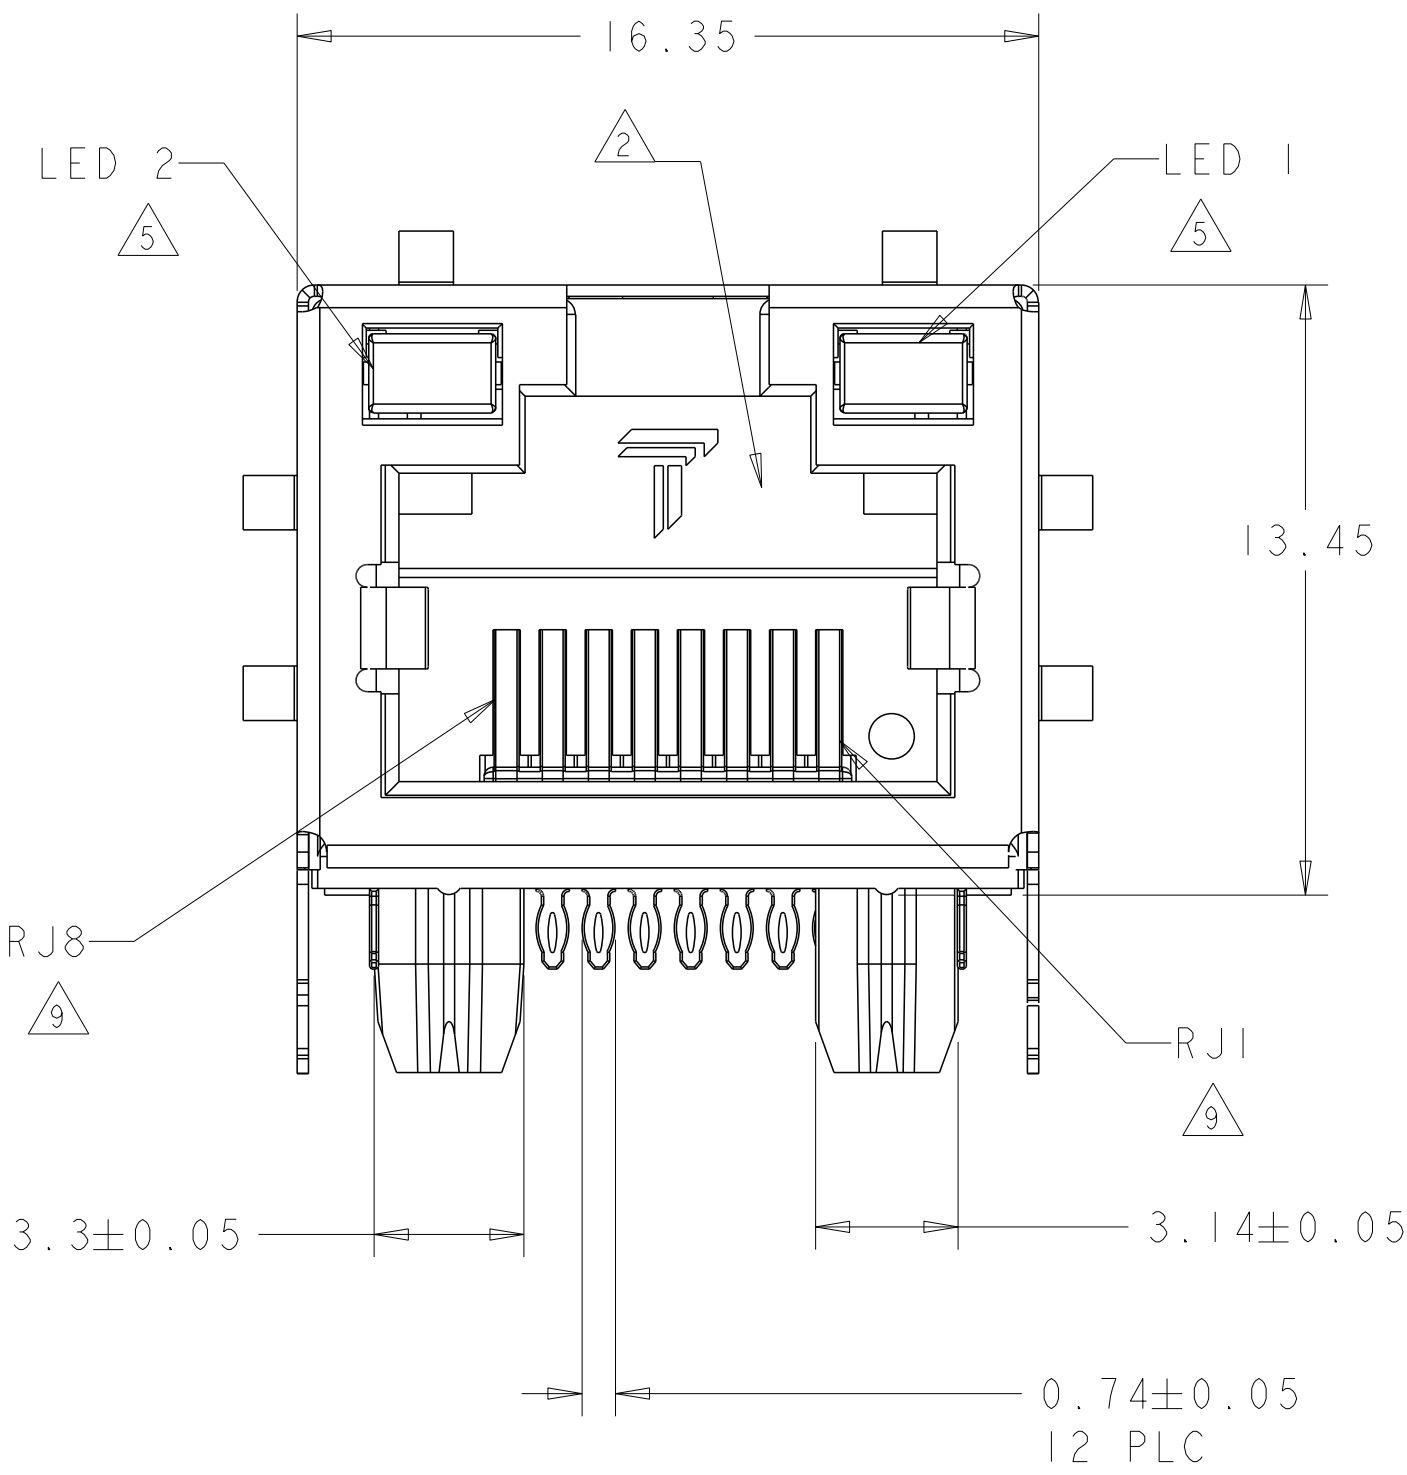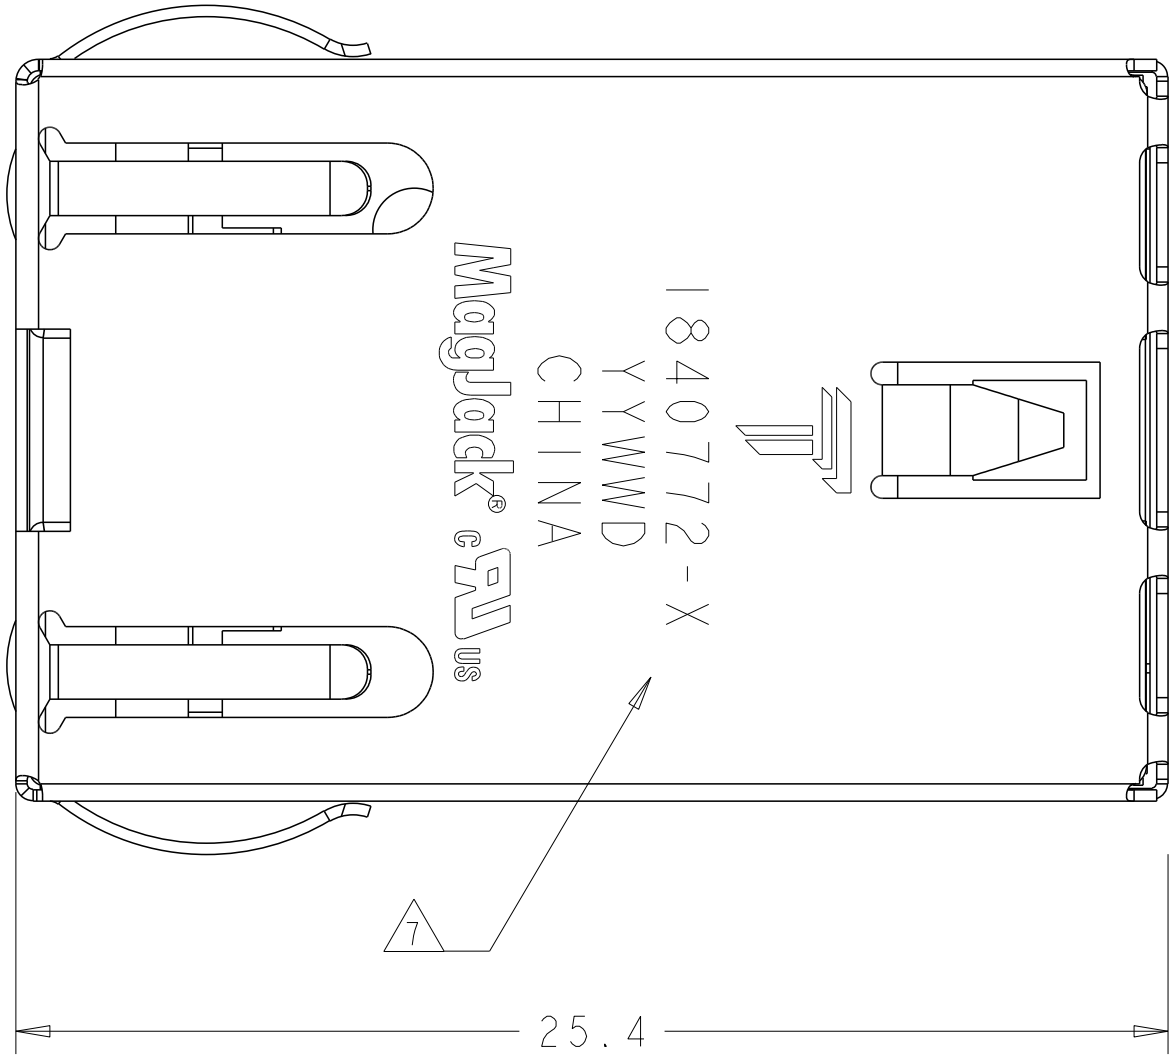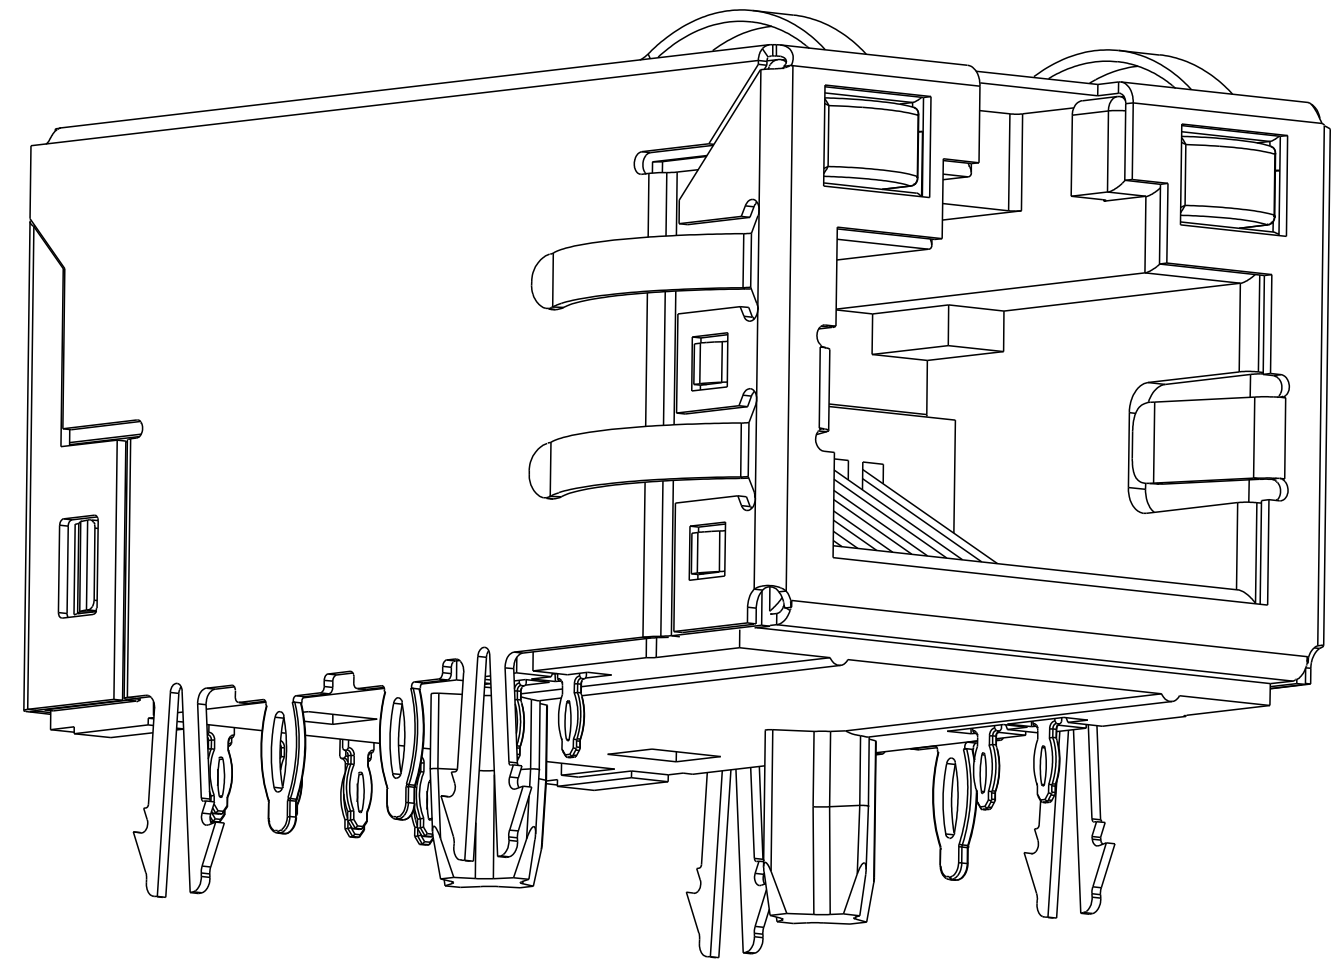


WITH	ORANGE	GREEN	1-1840772-7
WITHOUT	GREEN	YELLOW	1840772-8
WITHOUT	GREEN	GREEN	1840772-7
LUBE 9	LED 2	LED 1	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT. AND COMPLIANT TO ASME Y14.5M		DWN TOWER YU 04SEP2009	 trp CONNECTOR a bel group DONGGUAN CHINA	
DIMENSIONS: mm		CHK KEITH ZHU 04SEP2009		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.25 1 PLC ±0.25 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES APPLICATION SPEC		APVD KEITH ZHU 04SEP2009		
PRODUCT SPEC 108-104013		MODEL NAME MAGJACK SINGLE NON-POE		DESC 1X1 7G74P2 GIGABIT TAB UP PRESSFIT W/ LED
CUSTOMER DRAWING		SIZE A1	CAGE CODE C=1840772	RESTRICTED TO -
SCALE 6:1		SHEET 1	OF 3	REV G

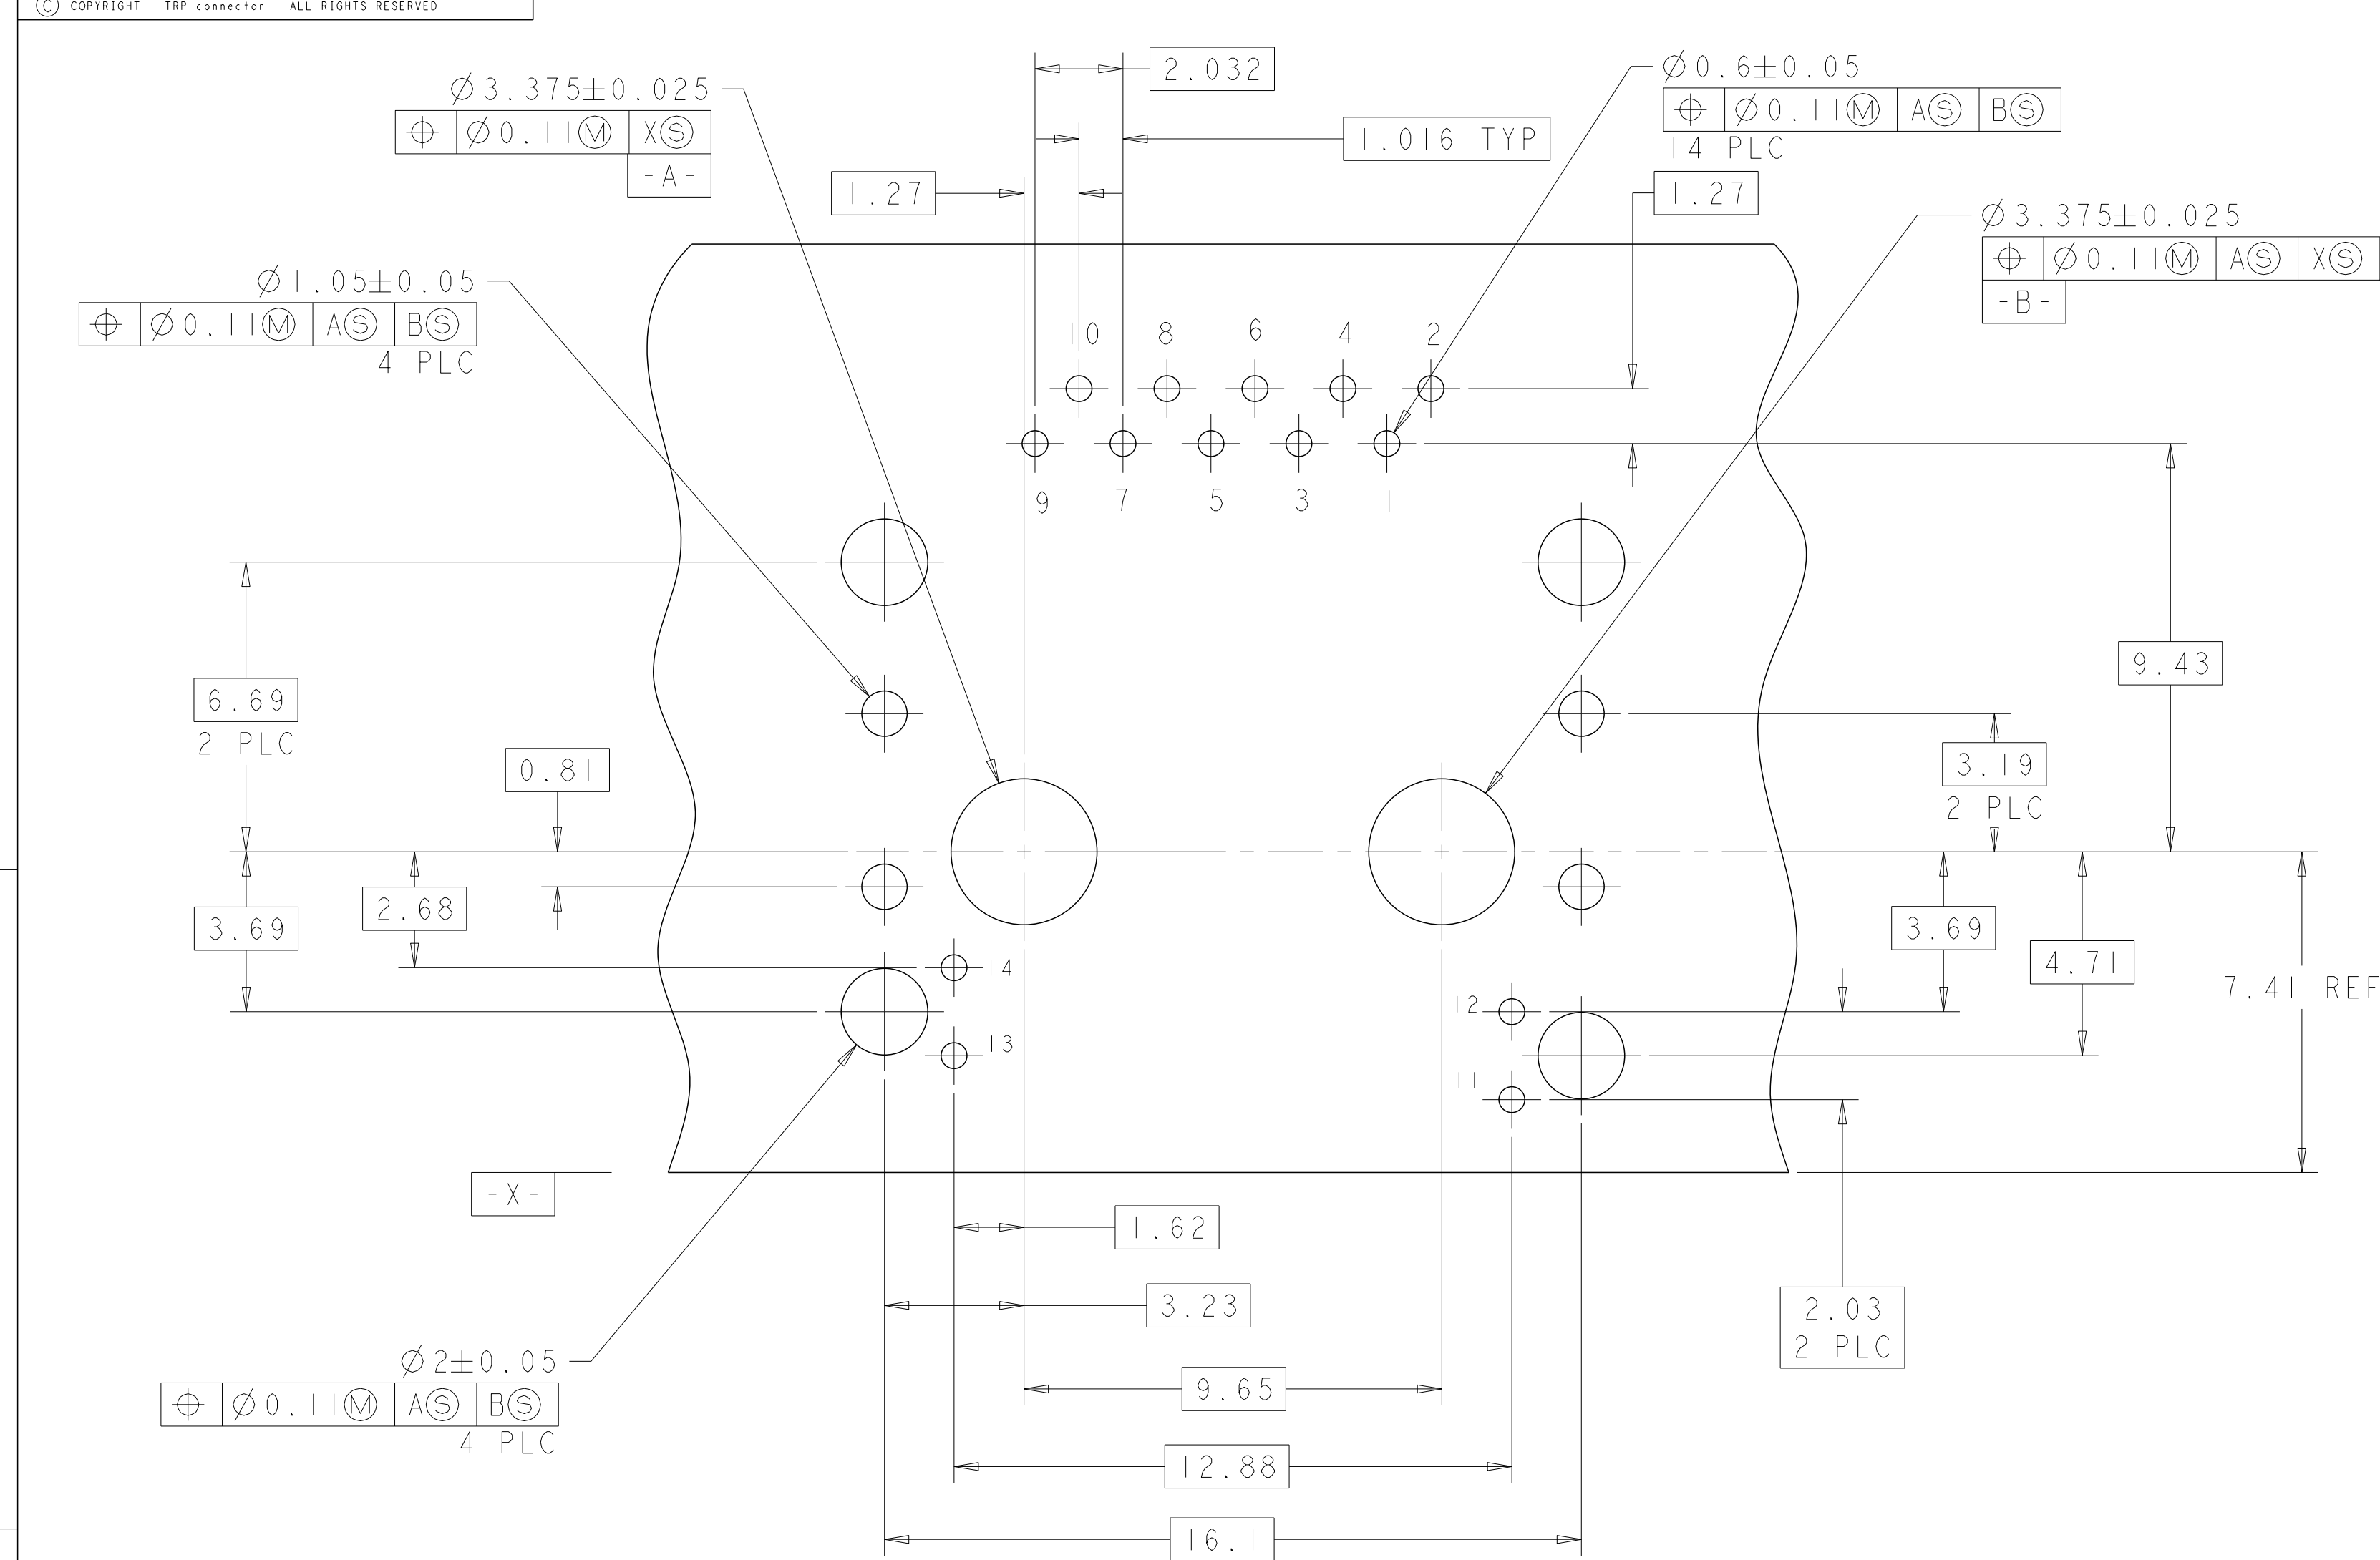

SUGGESTED CUSTOMER BOARD LAYOUT


7G74P2 GIGABIT BASE-T CIRCUIT

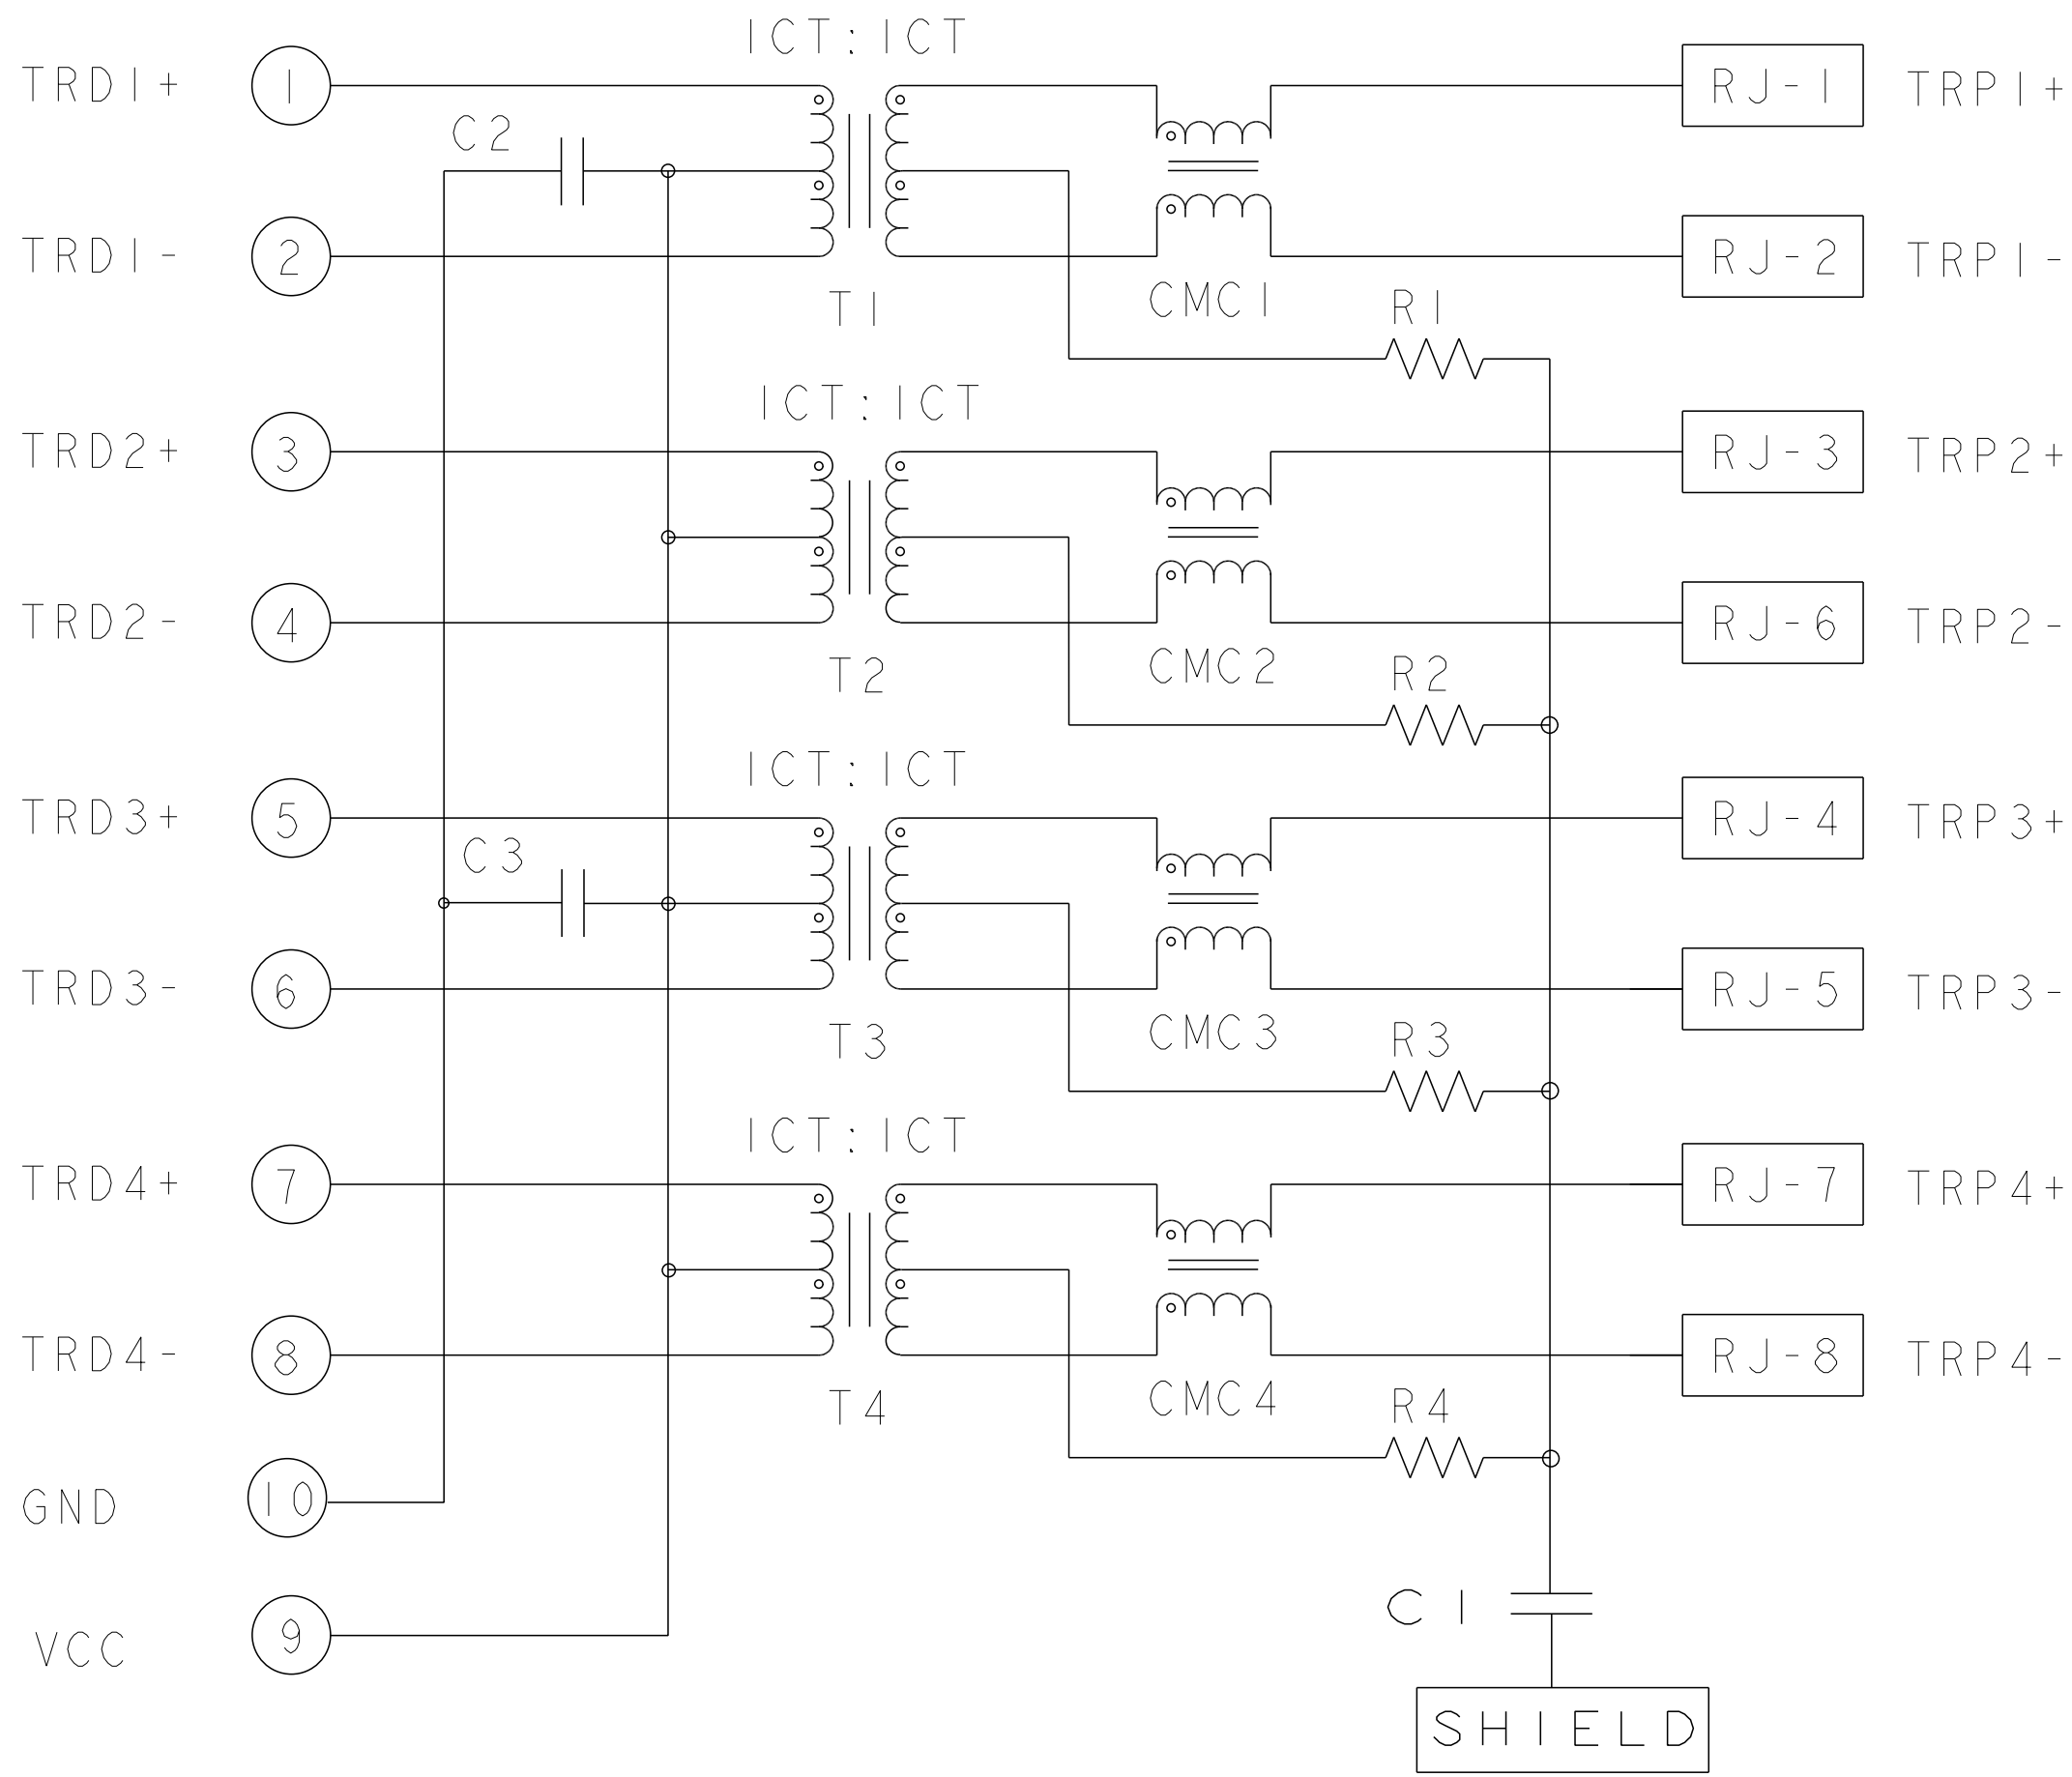


C1=1000PF, 3KV, ±10%, X7R DECOUPLING CAP

C2 -C3 = 100 nf CAPACITOR

R1-R4 = 75 OHMS, 1/16W, ±5% RESISTORS

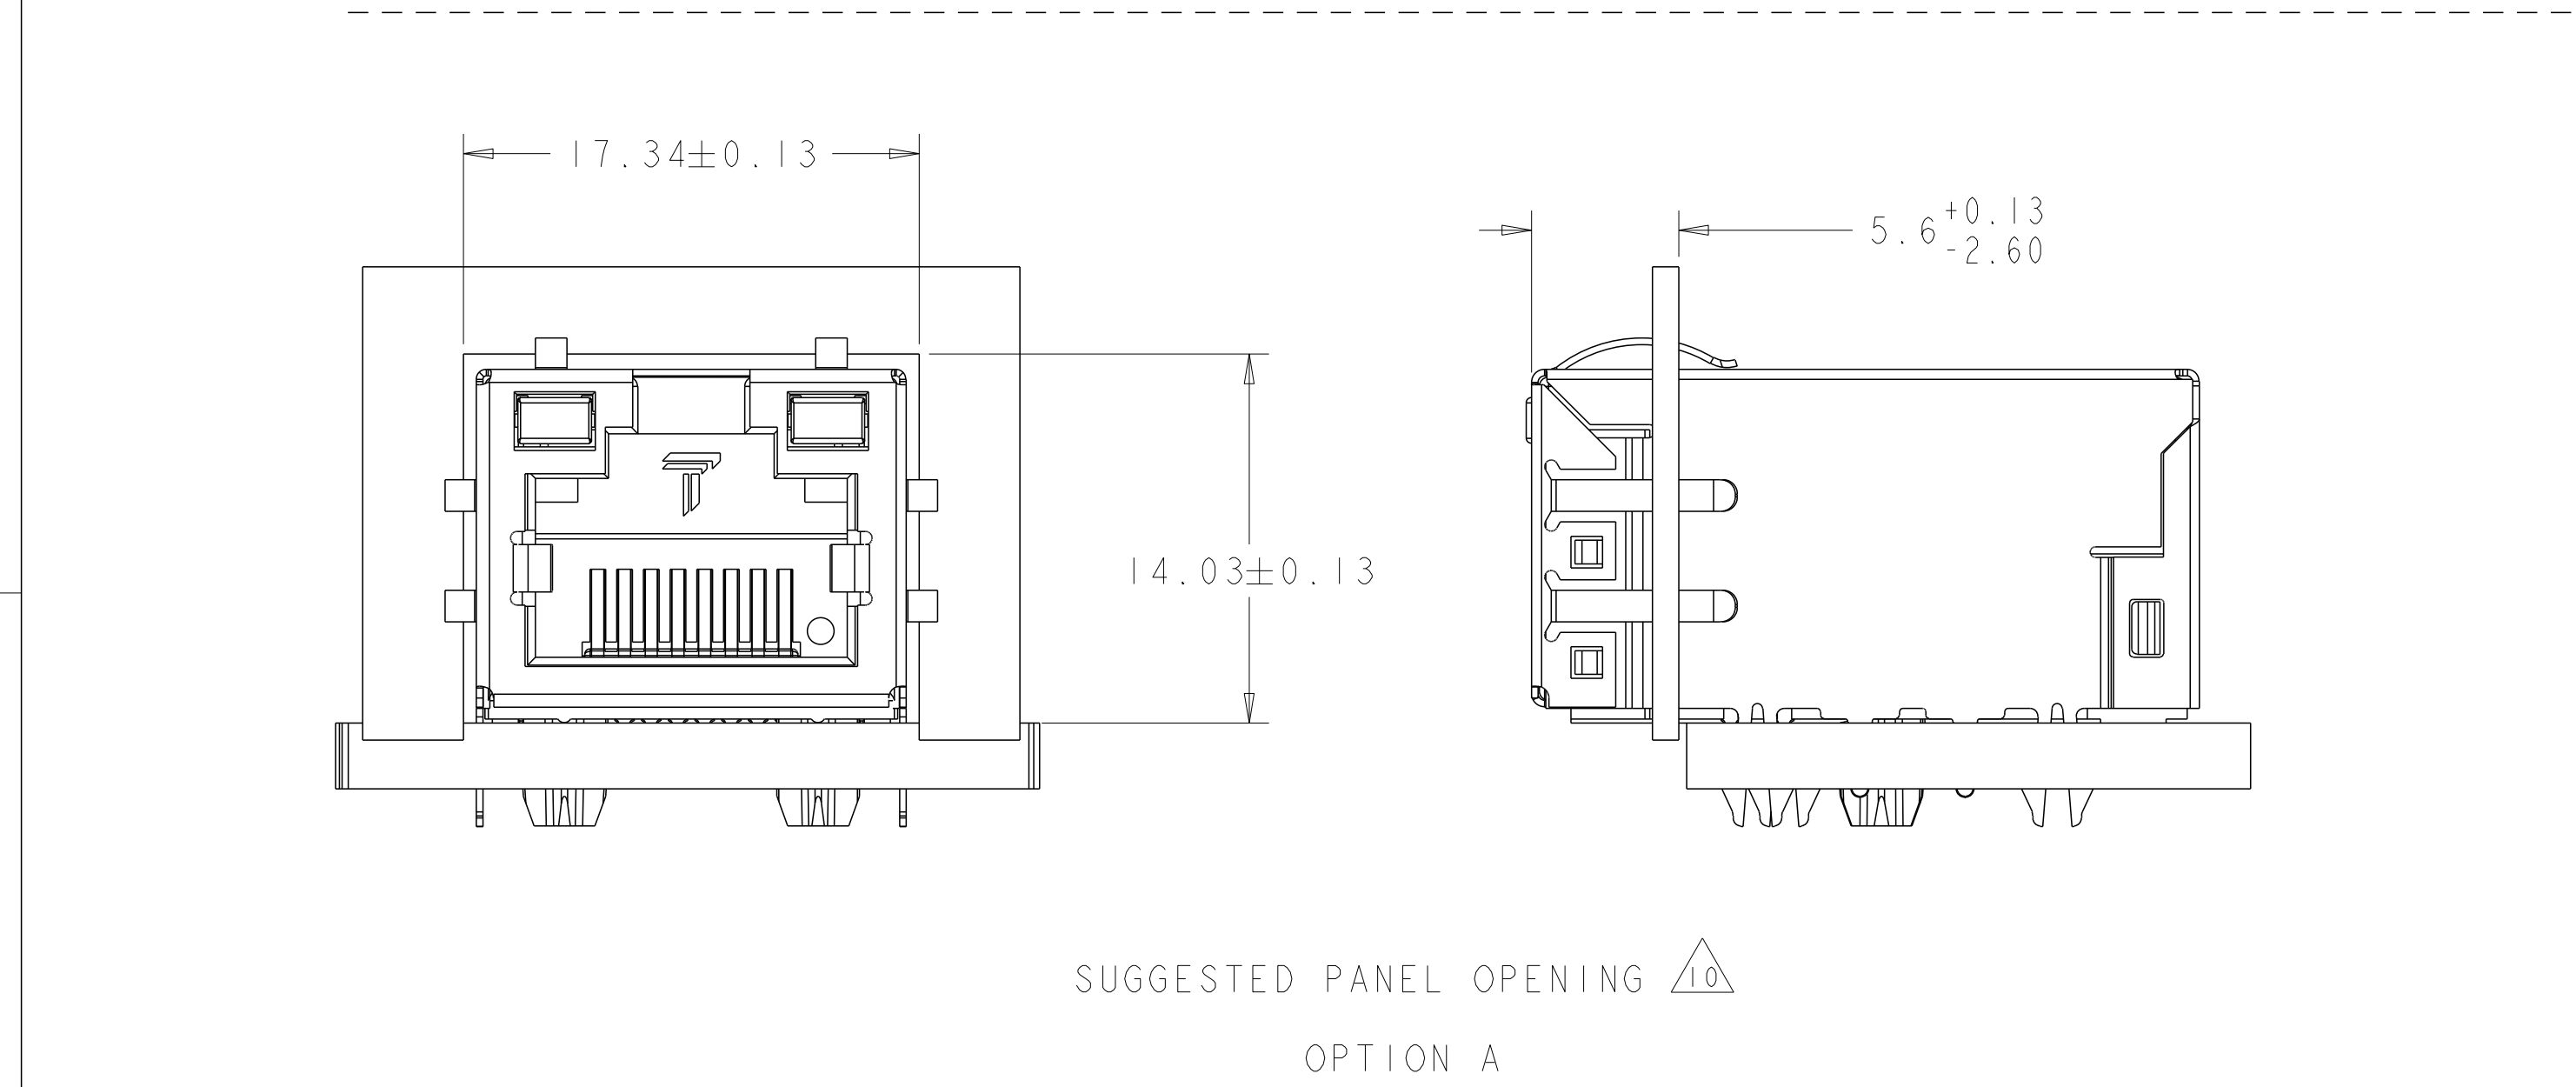


SUGGESTED PANEL OPENING OPTION A

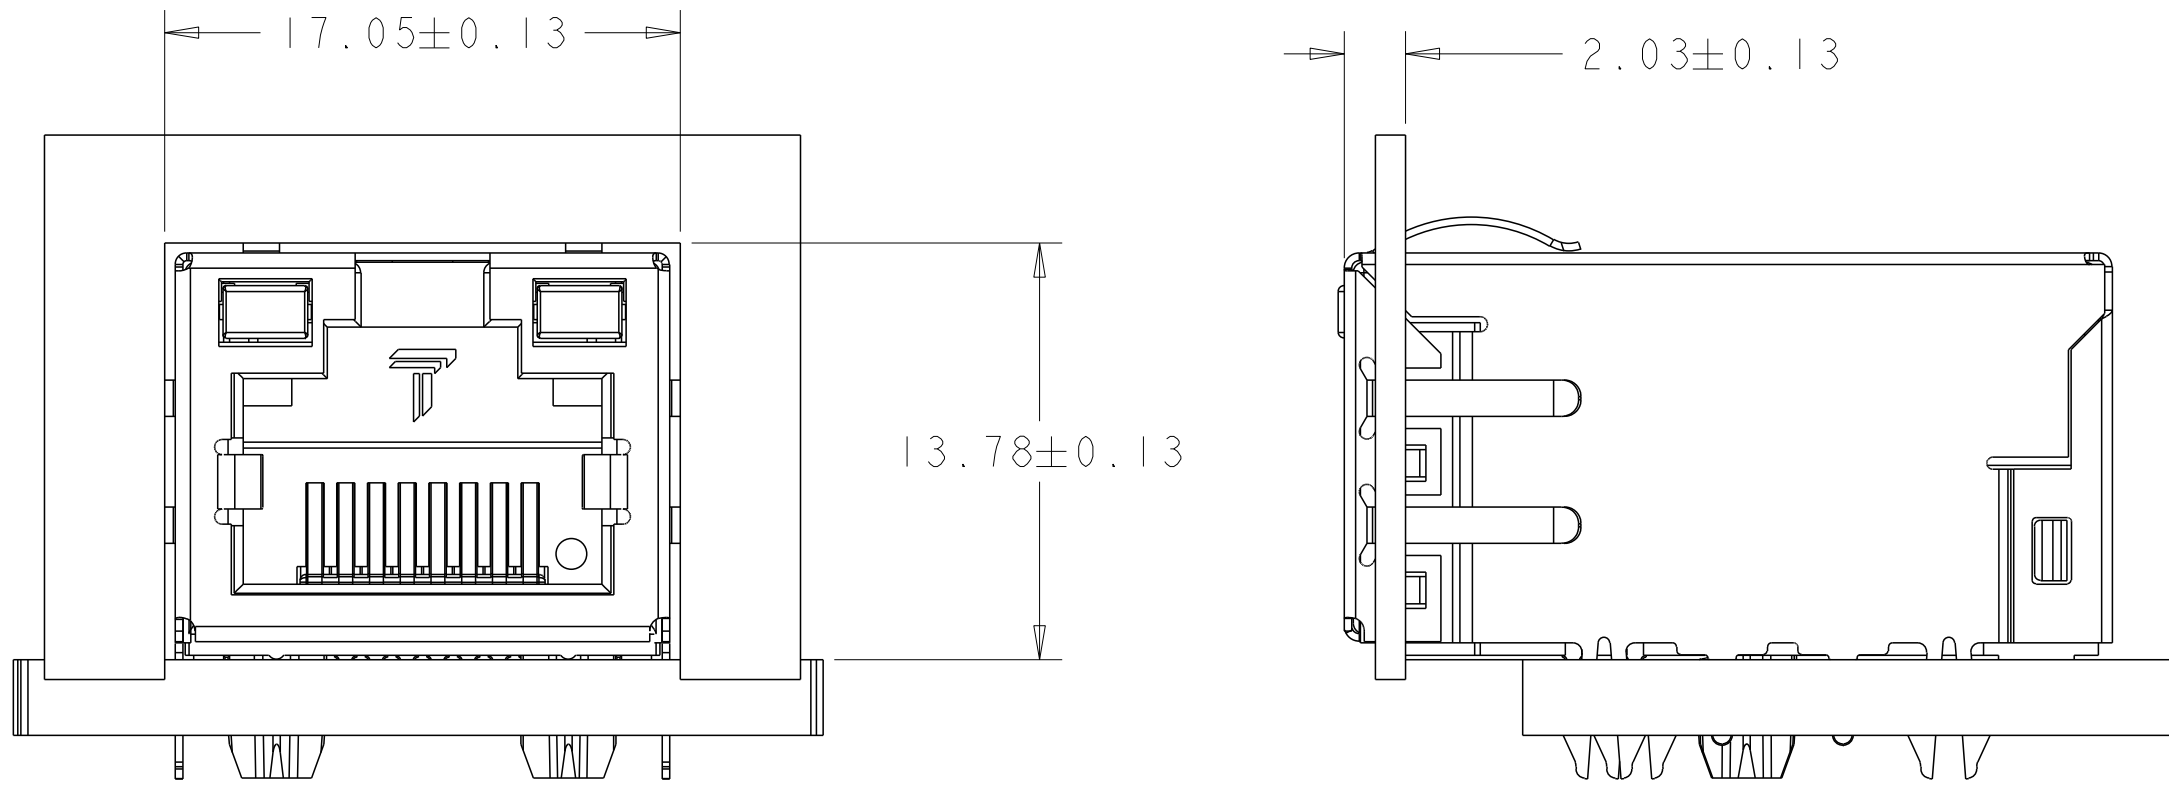


SUGGESTED PANEL OPENING OPTION B

THIS DRAWING IS A CONTROLLED DOCUMENT. AND COMPLIANT TO ASME Y14.5M		OWN TOWER YU	04SEP2009	trp CONNECTOR a bel group DONGGUAN CHINA	
DIMENSIONS:		CHK KEITH ZHU	04SEP2009		
mm		APVD KEITH ZHU	04SEP2009		
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DESC 1X1 7G74P2 GIGABIT TAB UP PRESSFIT W/ LED	
PRODUCT SPEC		MODEL NAME		SIZE	RESTRICTED TO
108-104013		MAGJACK		A1	-
APPLICATION SPEC		SINGLE NON-POE		C=1840772	-
-		CUSTOMER DRAWING		SCALE	REV
				4:1	G
				SHEET	OF
				2	3

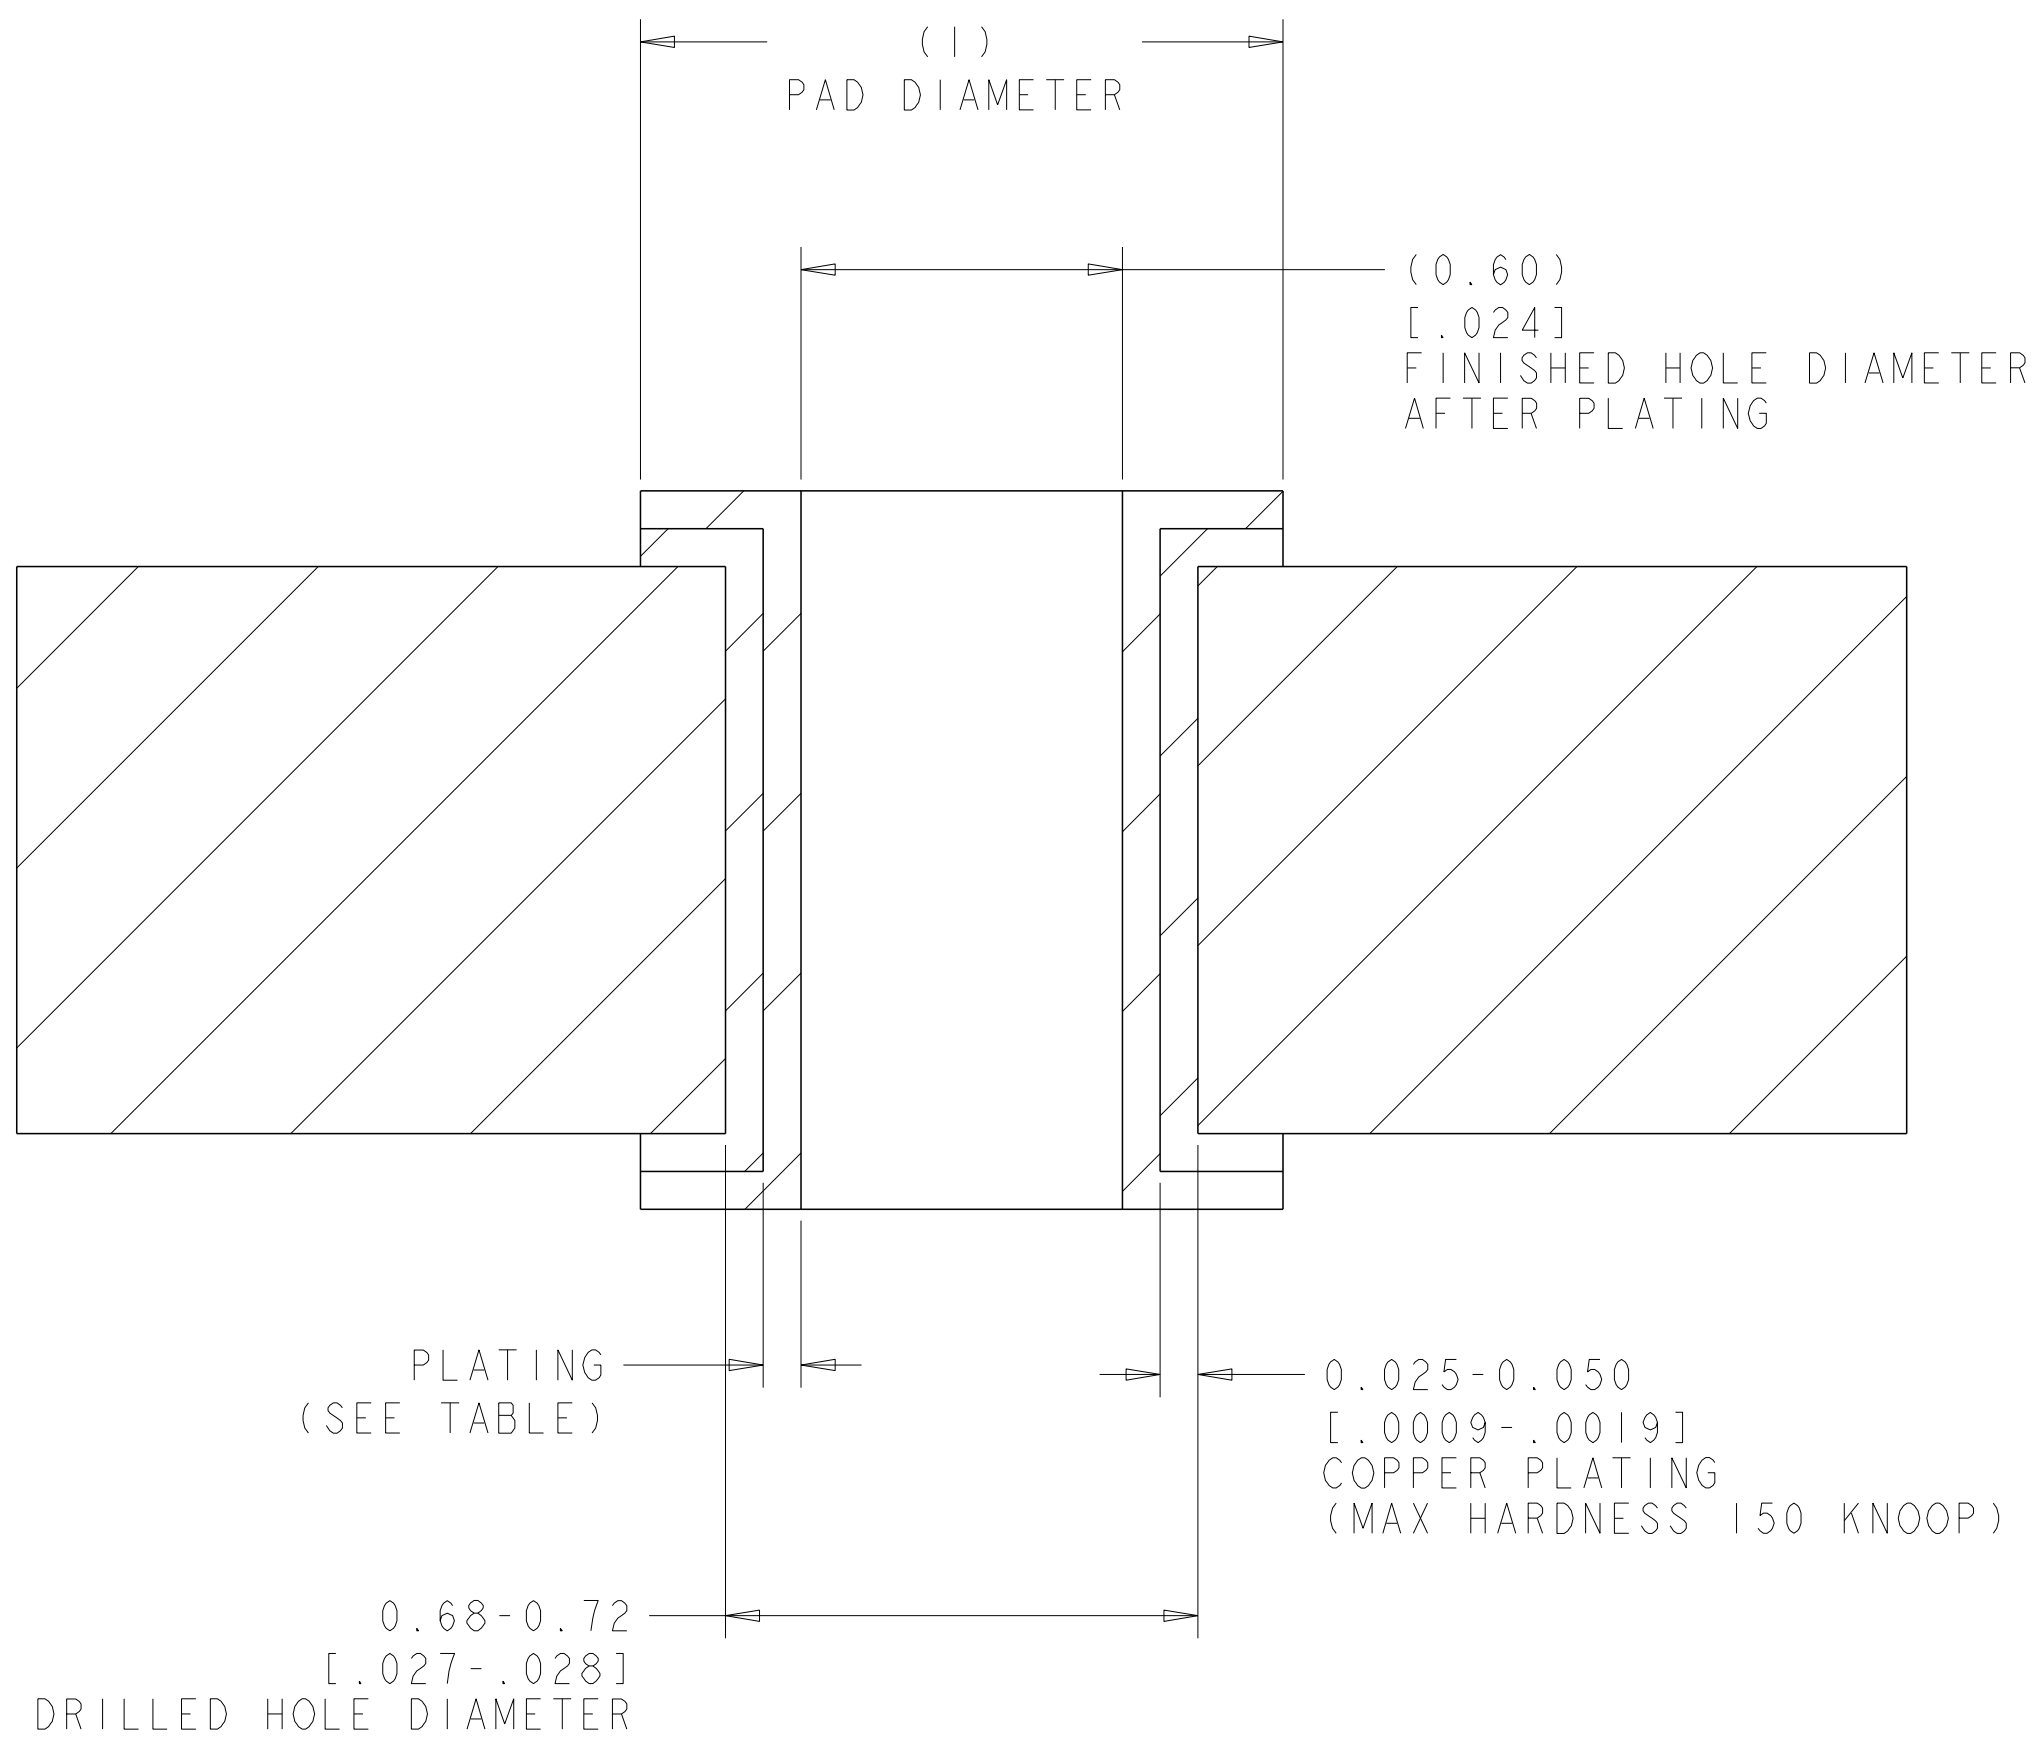

RECOMMENDED HOLE DIMENSIONS
FOR SIGNAL CONTACTS

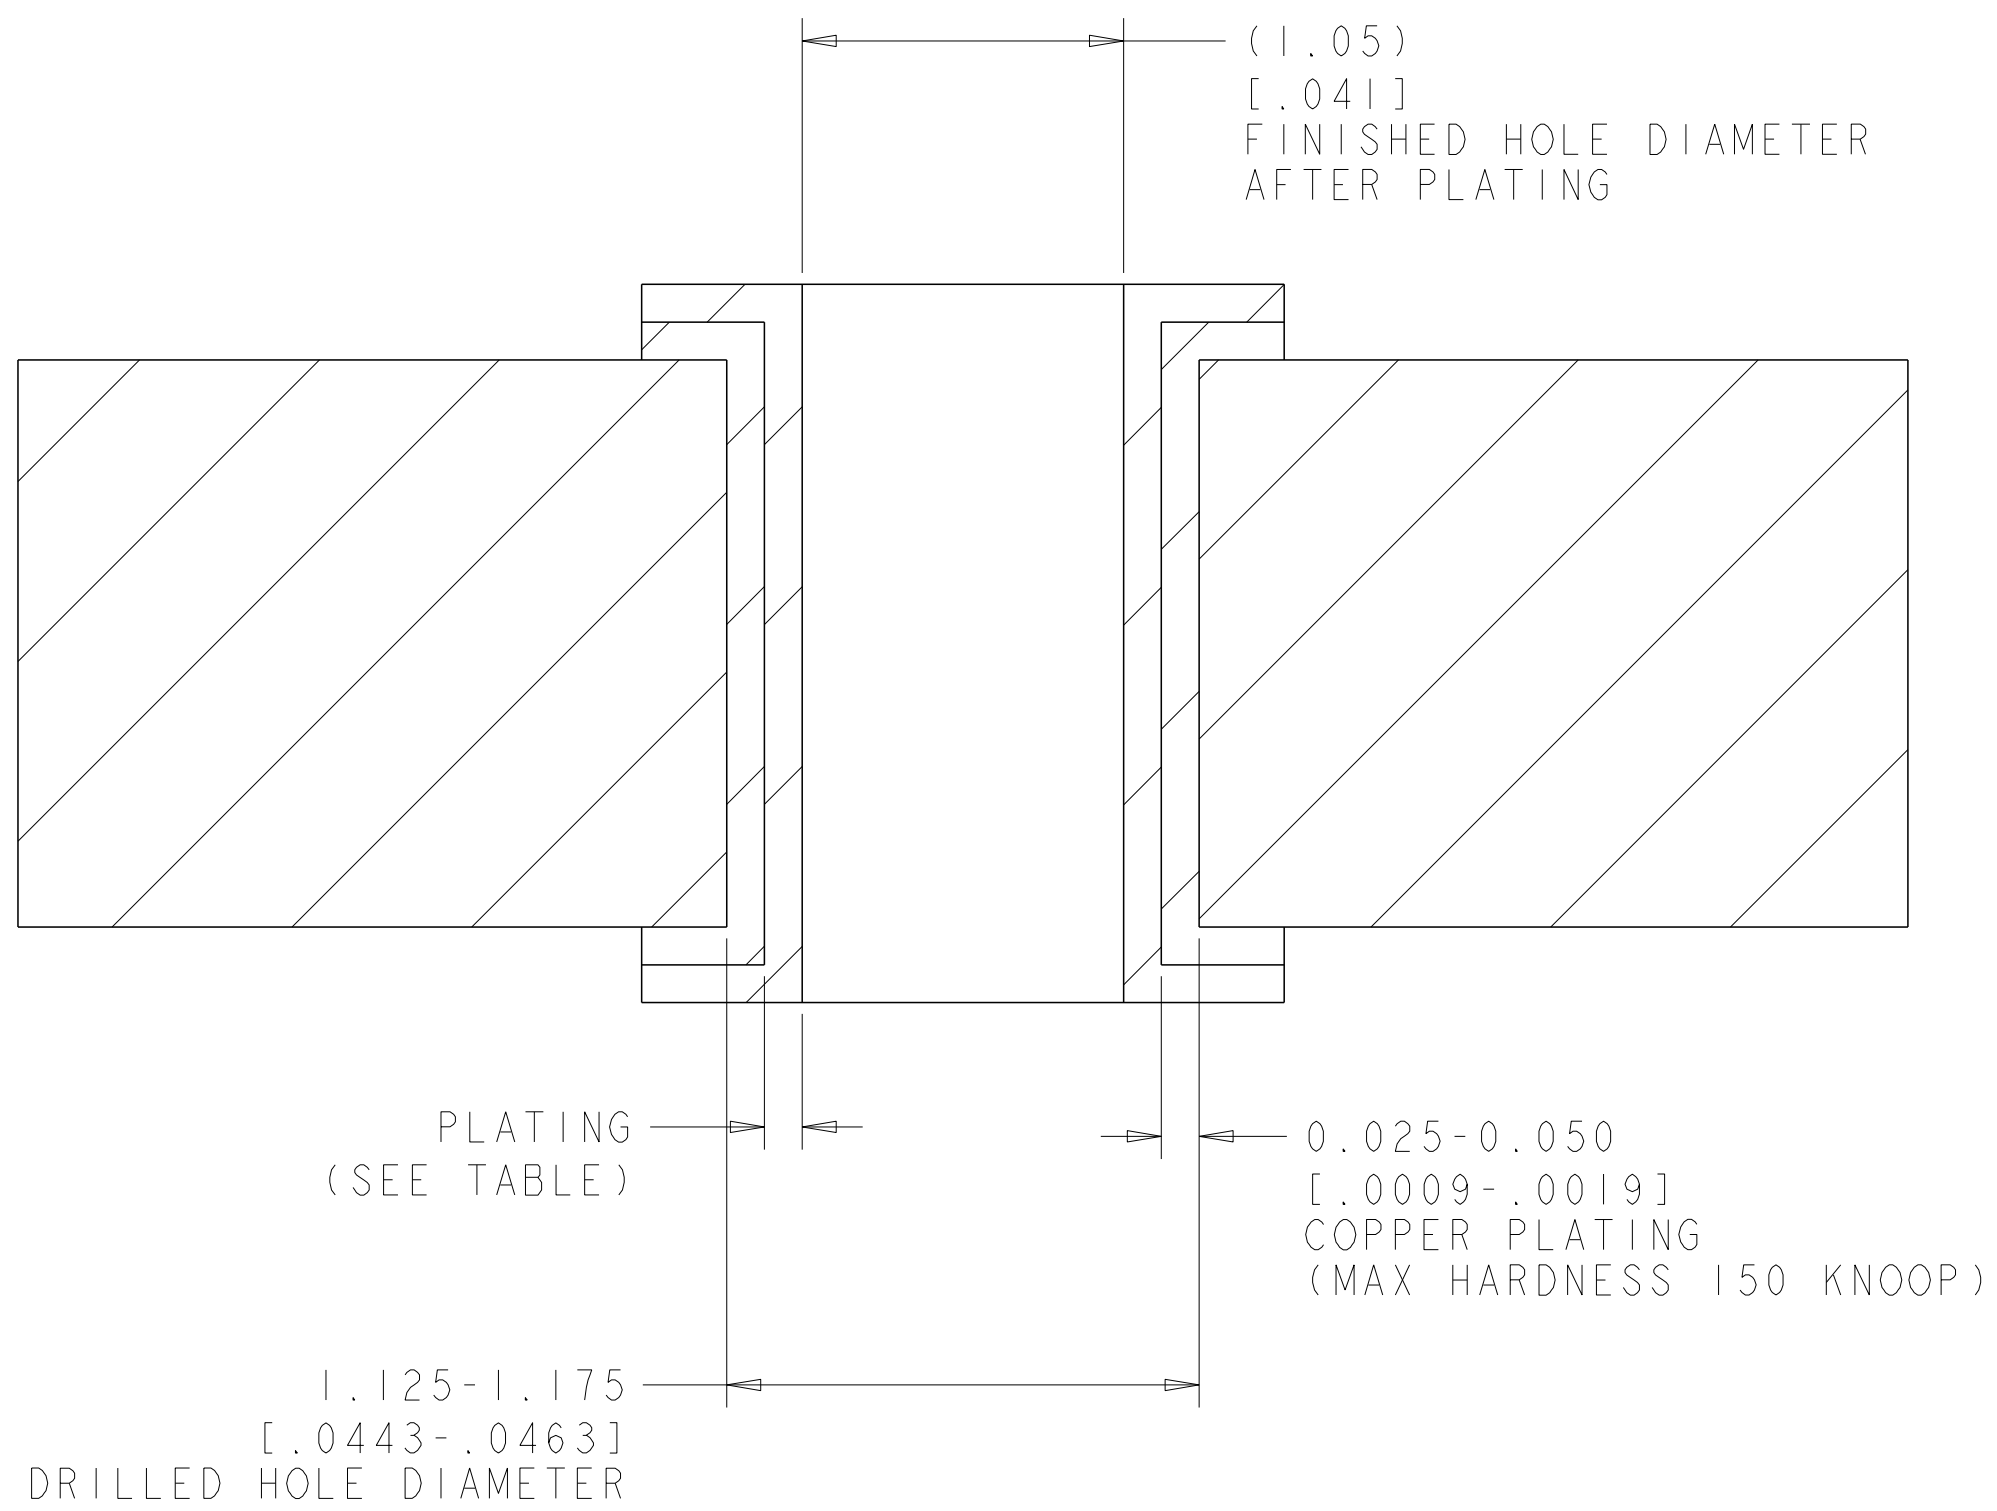

RECOMMENDED HOLE DIMENSIONS
FOR SHIELD CONTACTS

THICKNESS	PLATING
0.004-0.010	HOT AIR SOLDER LEVELING (HASL) TIN-LEAD (Sn Pb)
0.0005-0.001	IMMERSION TIN (Sn)
0.0002-0.0005	ORGANIC SOLDERABILITY PRESERVATIVE (OSP)
0.0001-0.0005 Au, 0.004-0.0076 Ni	IMMERSION GOLD (Au) OVER NICKEL (Ni) (ENIG)
0.010-0.025	TIN LEAD PLATING (Sn Pb)
0.0001-0.00015	IMMERSION SILVER (Ag)

THIS DRAWING IS A CONTROLLED DOCUMENT.
AND COMPLIANT TO ASME Y14.5M

DIMENSIONS:

mm

PRODUCT SPEC

108-104013

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±0.25

1 PLC ±0.25

2 PLC ±0.25

3 PLC ±

4 PLC ±

ANGLES

APPLICATION SPEC

-

DWN
TOWER YU
04SEP2009

CHK
KEITH ZHU
04SEP2009

APVD
KEITH ZHU
04SEP2009

MODEL NAME

MAGJACK

CUSTOMER DRAWING

DESC

IXI 7G74P2 GIGABIT
TAB UP PRESSFIT W/ LED

SIZE

A1

SCALE

1:1

SHEET

3

OF

3

REV

G

abel group

DONGGUAN
CHINA

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9