

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION

**Part Number:** [0527461171](#)  
**Status:** **Active**  
**Overview:**  
**Description:** 0.50mm (.020") Pitch FFC/FPC Connector, Right Angle, SMT, ZIF, Bottom Contact Style, 11 Circuits, Lead-free, Gold Contact Plating, High Barrier Packaging

**Agency Certification**

CSA LR19980  
UL E29179

**General**

Product Family FFC/FPC Connectors  
Series 52746  
Overview ffc\_fpc\_smt  
Product Name N/A

**Physical**

Circuits (Loaded) 11  
Contact Position Bottom  
Durability (mating cycles max) 20  
Entry Angle 90° Angle  
Flammability 94V-0  
Mated Height (in) 0.079 In  
Mated Height (mm) 2.00 mm  
Material - Metal Phosphor Bronze  
Material - Plating Mating Gold  
Material - Plating Termination Gold  
Number of Rows 1  
Orientation Right Angle  
PCB Locator No  
PCB Retention Yes  
Packaging Type Embossed Tape on Reel  
Pitch - Mating Interface (in) 0.020 In  
Pitch - Mating Interface (mm) 0.50 mm  
Polarized to PCB Yes  
Stackable No  
Temperature Range - Operating -20°C to +85°C  
Termination Interface: Style Surface Mount  
Wire/Cable Type FFC/FPC

**Electrical**

Current - Maximum per Contact 0.5A  
Voltage - Maximum 50V

**Material Info**

**Reference - Drawing Numbers**

Packaging Specification SPK-52746-001, SPK-52746-002  
Product Specification PS-52746-015, RPS-52746-017, RPS-52746-044, RPS-52746-045, RPS-52746-050, RPS-52746-051, RPS-52746-053, RPS-52746-054, RPS-52746-056, RPS-52746-057, RPS-52746-060, RPS-52746-062  
Sales Drawing SD-52746-024, SD-52746-025

**EU RoHS**  
**ELV and RoHS**  
**Compliant**  
**REACH SVHC**  
Not Reviewed  
**Halogen-Free**  
**Status**

**China RoHS**



**Not Reviewed**  
**Need more information on product environmental compliance?**  
  
Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)  
  
Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**  
[52746Series](#)


**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# 注記 NOTES

1. 製品番号 52746-\*\*\*39 の梱包状態はアクチュエータがロックした状態とする。  
詳細寸法については図面 SD-52746-025 を参照下さい。  
IN THE PACKAGE,ACTUATOR OF PART NO.52746-\*\*\*39 SHOULD BE LOCKED  
RE DETAILED DIMENSIONS,SEE SD-52746-025

2. 梱包数量：1000個/リール  
NUMBER OF CONNECTORS:1000PCS/REEL

3. リードテープ長さ LEAD TAPE LENGTH

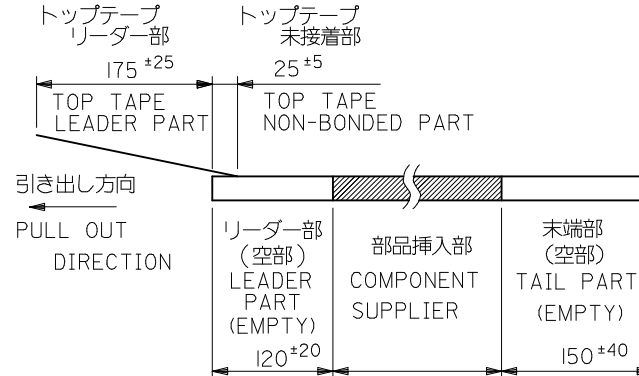

4. トップテープの剥離強度：(剥離方向は下図参照)

0.1N～1.3N{10gf～130gf}

尚、本規格値は、出荷時に適用。

(但し、輸送時に剥離が発生しない事。)




PEELING OFF FORCE OF TOP TAPE

0.1N～1.3N{10gf～130gf}(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)

THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT

PEEL OFF SHOULD NOT BE ALLOWED,

DURING TRANSPORTATION

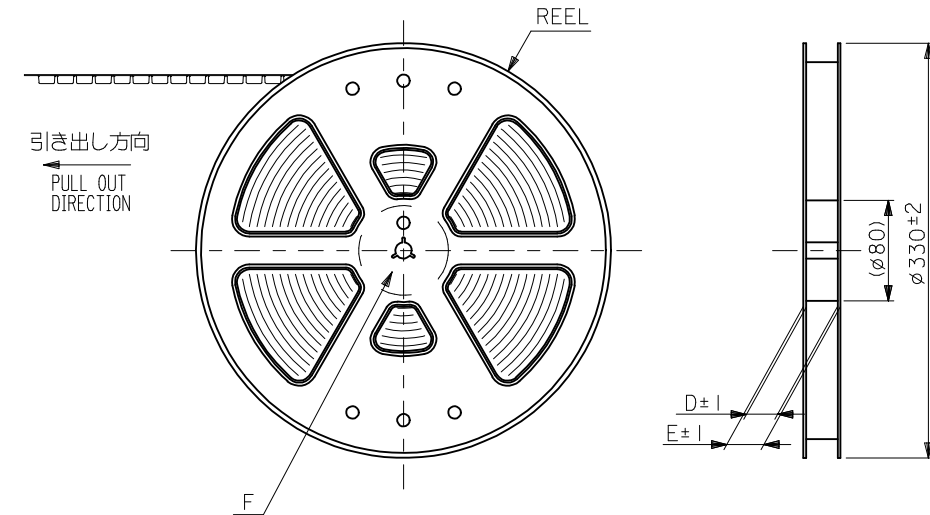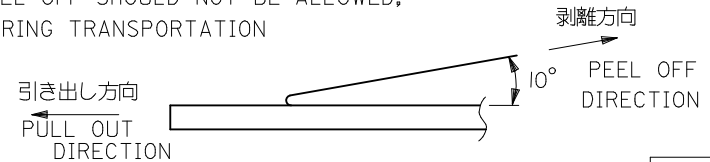

DETAIL F

5. 材料  
キャリアテープ:ポリプロピレン (PP)  
トップテープ:PET, PE, PEF  
リール:ポリスチレン (PS) <リサイクル材を含む>

MATERIAL CARRIER TAPE:POLYPROPYLENE  
TOP TAPE:PET,PE,PEF  
REEL:POLYSTYRENE(PS)  
<RECYCLE MATERIAL CONTAINED>

6. 本製品は 52746-\*\*\*81 の鉛フリー品です

THIS PRODUCT IS LEAD FREE OF 52746-\*\*\*81

7. 本製品は乾燥剤入り、ハイバリア梱包仕様である。

THIS PRODUCT IS HIGH BARRIER PACKAGE WITH DESICCANT.

MODEL No.52746-\*\*\*71

|         |                                                                 |                                        |             |                                                            |       |                                                                                                                                  |                   |                                                                      |                        |                           |  |  |
|---------|-----------------------------------------------------------------|----------------------------------------|-------------|------------------------------------------------------------|-------|----------------------------------------------------------------------------------------------------------------------------------|-------------------|----------------------------------------------------------------------|------------------------|---------------------------|--|--|
| REVISED | EC NO: J2009-2061<br>DRWN:TKON<br>CHKD:HMTSUMOTO<br>APPR:NUKITA | 2009/05/20<br>2009/05/21<br>2009/05/21 | DESCRIPTION | GENERAL TOLERANCES<br>(UNLESS SPECIFIED)                   |       | DIMENSION STYLE<br>MM ONLY                                                                                                       |                   | SCALE<br>---                                                         | DESIGN UNITS<br>METRIC | THIRD ANGLE<br>PROJECTION |  |  |
|         |                                                                 |                                        |             | 10 UNDER                                                   | ±0.2  | DRAWN BY<br>HSHIMABUKURO                                                                                                         | DATE<br>'04/01/30 | TITLE<br>0.5 FPC CONN ZIF SMT RA<br>B/CONT EMBSTP PKG<br>-LEAD FREE- |                        |                           |  |  |
|         |                                                                 |                                        |             | 10 OVER 30 UNDER                                           | ±0.25 | CHECKED BY<br>KTOJO                                                                                                              | DATE<br>'04/01/30 |                                                                      |                        |                           |  |  |
|         |                                                                 |                                        |             | 30 OVER                                                    | ±0.3  | APPROVED BY<br>MSASAO                                                                                                            | DATE<br>'04/01/30 | MOLEX INCORPORATED                                                   |                        |                           |  |  |
|         |                                                                 |                                        |             | ANGULAR                                                    | ±3 °  | MATERIAL NO.<br>SEE SHEET 2.3                                                                                                    |                   |                                                                      |                        |                           |  |  |
|         |                                                                 |                                        |             | DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS |       | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX<br>INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                   |                                                                      |                        |                           |  |  |

F

E

D

C

B

A

F


E

D


C

B


A

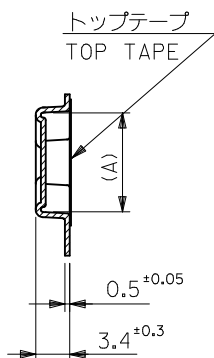


SECT.V-V

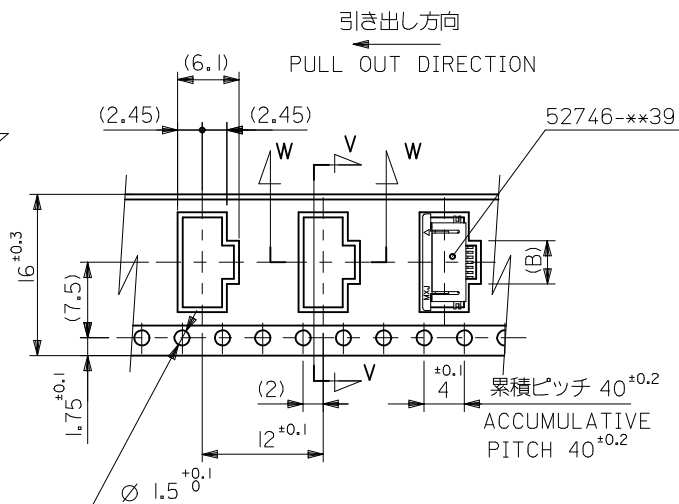


16mm幅キャリアテープ  
16mm WIDTH CARRIER TAPE

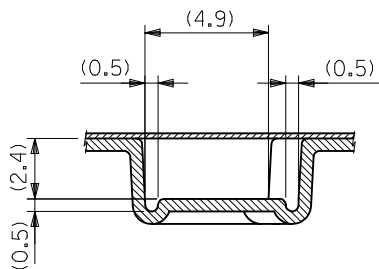


SECT. W-W

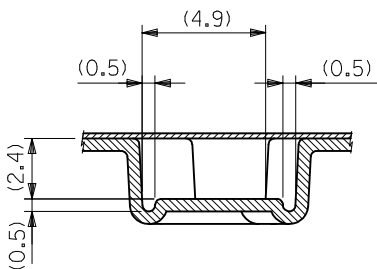

SECT.X-X


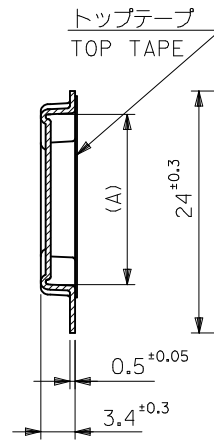


SECT.Y-Y

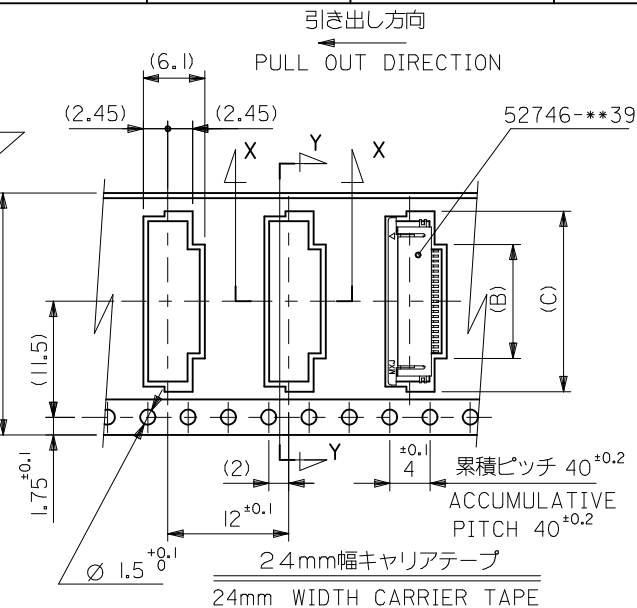

|                                |      |      |      |      |      |              |                |
|--------------------------------|------|------|------|------|------|--------------|----------------|
| 24                             | 29.4 | 25.4 | 24.4 | 11.8 | 17.4 | 52746-2271   | 22             |
|                                |      |      | 17.9 | 11.3 | 16.9 | 52746-2171   | 21             |
|                                |      |      | 17.4 | 10.8 | 16.4 | 52746-2071   | 20             |
|                                |      |      | 16.9 | 10.3 | 15.9 | 52746-1971   | 19             |
|                                |      |      | 16.4 | 9.8  | 15.4 | 52746-1871   | 18             |
|                                |      |      | 15.9 | 9.3  | 14.9 | 52746-1771   | 17             |
|                                |      |      | 15.4 | 8.8  | 14.4 | 52746-1671   | 16             |
|                                |      |      | 14.9 | 8.3  | 13.9 | 52746-1571   | 15             |
|                                |      |      | 14.4 | 7.8  | 13.4 | 52746-1471   | 14             |
|                                |      |      | 13.9 | 7.3  | 12.9 | 52746-1371   | 13             |
|                                |      |      | 13.4 | 6.8  | 12.4 | 52746-1271   | 12             |
|                                |      |      | 12.9 | 6.3  | 11.9 | 52746-1171   | 11             |
|                                |      |      | 12.4 | 5.8  | 11.4 | 52746-1071   | 10             |
|                                |      |      | 11.9 | 5.3  | 10.9 | 52746-0971   | 9              |
|                                |      |      | 11.4 | 4.8  | 10.4 | 52746-0871   | 8              |
|                                |      |      | 10.9 | 4.3  | 9.9  | 52746-0771   | 7              |
|                                |      |      | 10.4 | 3.8  | 9.4  | 52746-0671   | 6              |
|                                |      |      | 9.4  | 2.8  | 8.4  | 52746-0471   | 4              |
| キャリアテープ幅<br>CARRIER TAPE WIDTH | E    | D    | (C)  | (B)  | (A)  | MATERIAL NO. | 極数<br>CIRCUITS |

|                                                                                                                      |             |                                                            |        |                            |                                                                                                                                  |                                                                      |                        |                                                                                                                 |  |
|----------------------------------------------------------------------------------------------------------------------|-------------|------------------------------------------------------------|--------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|------------------------|-----------------------------------------------------------------------------------------------------------------|--|
| REVISED<br>EC NO: J2009-2061<br>DRWN:TKN<br>CHKD:HMATSUMOTO<br>APPR:NUKITA<br>2009/05/20<br>2009/05/21<br>2009/05/21 | DESCRIPTION | GENERAL TOLERANCES<br>(UNLESS SPECIFIED)                   |        | DIMENSION STYLE<br>MM ONLY |                                                                                                                                  | SCALE<br>---                                                         | DESIGN UNITS<br>METRIC |  THIRD ANGLE<br>PROJECTION |  |
|                                                                                                                      |             | 10 UNDER                                                   | ± 0.2  | DRAWN BY<br>HSHIMABUKURO   | DATE<br>'04/01/30                                                                                                                | TITLE<br>0.5 FPC CONN ZIF SMT RA<br>B/CONT EMBSTP PKG<br>-LEAD FREE- |                        |                                                                                                                 |  |
|                                                                                                                      |             | 10 OVER 30 UNDER                                           | ± 0.25 | CHECKED BY<br>KTOJO        | DATE<br>'04/01/30                                                                                                                |                                                                      |                        |                                                                                                                 |  |
|                                                                                                                      |             | 30 OVER                                                    | ± 0.3  | APPROVED BY<br>MSASAO      | DATE<br>'04/01/30                                                                                                                |                                                                      |                        |                                                                                                                 |  |
|                                                                                                                      |             | ANGULAR ±3 °                                               |        | MATERIAL NO.<br>SEE TABLE  |                                                                                                                                  | DOCUMENT NO.<br>SD-52746-024                                         |                        | SHEET NO.<br>2 OF 3                                                                                             |  |
|                                                                                                                      | REV         | DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS |        | SIZE<br>A3                 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX<br>INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                                                                      |                        |                                                                                                                 |  |



MODEL No.52746-xx71

tb\_frame\_A3\_J\_ME\_S  
Rev. E 2006/04/15

F

E

D

C

B

A

F

E

D

C

B

A

注記 NOTES

1. 使用材料 MATERIAL

ハウジング HOUSING : 46ナイロン、UL94V-0  
46NYLON

アクチュエータ ACTUATOR : PPS、UL94V-0

ターミナル TERMINAL : リン青銅 (≒0.2)、ニッケル下地 金メッキ  
PHOSHOR BRONZE, GOLD OVER NICKEL PLATING

金具 FITTING NAIL : リン青銅 (≒0.2)、ニッケル下地 金メッキ  
PHOSHOR BRONZE, TIN OVER NICKEL PLATING

2. エンボステープ組付け時は、アクチュエータがロックした状態とする。  
IN THE PACKAGE, ACTUATOR OF PART NO.52746-\*\*39 SHOULD BE LOCKED.

△ ソルダーテール半田付け面のズレ量、及び金具半田付け面のズレ量は、基準面 H に対し上下方向 0.1MAX、左右方向 0.15MAX、とする。  
MISALIGNMENT OF SOLDER TAILS AND FITTING NAILS FROM H  
UPPER DIRECTION: 0.1 MAX., LOWER DIRECTION: 0.15 MAX.

△ 偶数極に適用。  
APPLY FOR EVEN CIRCUIT.

△ パターンはくり止め用金具  
FITTING NAIL FOR PREVENTION OF PEELING  
OF P.C.B. PATTERN.

6. 本製品は 52746-\*\*38の鉛フリー品です。  
THIS PRODUCT IS LEAD FREE OF 52746-\*\*38

|      |      |       |      |                                  |              |                |
|------|------|-------|------|----------------------------------|--------------|----------------|
| 21.1 | 19.3 | 15.65 | 14.5 | 52746-3071                       | 52746-3039   | 30             |
| 20.6 | 18.8 | 15.15 | 14.0 | 52746-2971                       | 52746-2939   | 29             |
| 20.1 | 18.3 | 14.65 | 13.5 | 52746-2871                       | 52746-2839   | 28             |
| 19.6 | 17.8 | 14.15 | 13.0 | 52746-2771                       | 52746-2739   | 27             |
| 19.1 | 17.3 | 13.65 | 12.5 | 52746-2671                       | 52746-2639   | 26             |
| 18.6 | 16.8 | 13.15 | 12.0 | 52746-2571                       | 52746-2539   | 25             |
| 18.1 | 16.3 | 12.65 | 11.5 | 52746-2471                       | 52746-2439   | 24             |
| 17.6 | 15.8 | 12.15 | 11.0 | 52746-2371                       | 52746-2339   | 23             |
| 17.1 | 15.3 | 11.65 | 10.5 | 52746-2271                       | 52746-2239   | 22             |
| 16.6 | 14.8 | 11.15 | 10.0 | 52746-2171                       | 52746-2139   | 21             |
| 16.1 | 14.3 | 10.65 | 9.5  | 52746-2071                       | 52746-2039   | 20             |
| 15.6 | 13.8 | 10.15 | 9.0  | 52746-1971                       | 52746-1939   | 19             |
| 15.1 | 13.3 | 9.65  | 8.5  | 52746-1871                       | 52746-1839   | 18             |
| 14.6 | 12.8 | 9.15  | 8.0  | 52746-1771                       | 52746-1739   | 17             |
| 14.1 | 12.3 | 8.65  | 7.5  | 52746-1671                       | 52746-1639   | 16             |
| 13.6 | 11.8 | 8.15  | 7.0  | 52746-1571                       | 52746-1539   | 15             |
| 13.1 | 11.3 | 7.65  | 6.5  | 52746-1471                       | 52746-1439   | 14             |
| 12.6 | 10.8 | 7.15  | 6.0  | 52746-1371                       | 52746-1339   | 13             |
| 12.1 | 10.3 | 6.65  | 5.5  | 52746-1271                       | 52746-1239   | 12             |
| 11.6 | 9.8  | 6.15  | 5.0  | 52746-1171                       | 52746-1139   | 11             |
| 11.1 | 9.3  | 5.65  | 4.5  | 52746-1071                       | 52746-1039   | 10             |
| 10.6 | 8.8  | 5.15  | 4.0  | 52746-0971                       | 52746-0939   | 9              |
| 10.1 | 8.3  | 4.65  | 3.5  | 52746-0871                       | 52746-0839   | 8              |
| 9.6  | 7.8  | 4.15  | 3.0  | 52746-0771                       | 52746-0739   | 7              |
| 9.1  | 7.3  | 3.65  | 2.5  | 52746-0671                       | 52746-0639   | 6              |
| 8.1  | 6.3  | 2.65  | 1.5  | 52746-0471                       | 52746-0439   | 4              |
| D    | C    | B     | (A)  | EMBOSSD TAPE<br>ORDER No. オーダー番号 | MATERIAL NO. | 極数<br>CIRCUITS |

52746-\*\*39

MODEL NO.

DESIGN UNITS  
METRIC

THIRD ANGLE  
PROJECTION

0.5 FPC CONN ZIF FOR SMT  
R/A (BOTTOM CONTACT)  
-LEAD FREE-

MOLEX INCORPORATED

SD-52746-025

SHEET NO.  
1 OF 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX  
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

GENERAL TOLERANCES  
(UNLESS SPECIFIED)

DIMENSION STYLE  
MM ONLY

SCALE  
---

DRAWN BY DATE

CHECKED BY DATE

APPROVED BY DATE

MATERIAL NO.

SEE TABLE

SIZE

A3

10 UNDER ±0.2

10 OVER 30 UNDER ±0.25

30 OVER ±0.3

ANGULAR ±3 °

DRAFT WHERE APPLICABLE  
MUST REMAIN  
WITHIN DIMENSIONS

REVISED

EC NO: J2008-4308

DRWN:WABEI

CHKD:THARUYAMA

APPR:NUKITA

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

2008/06/30

DESCRIPTION

REV

2008/06/27

2008/06/30

F

E

D

C

B

A

F




E

D

C

B

A

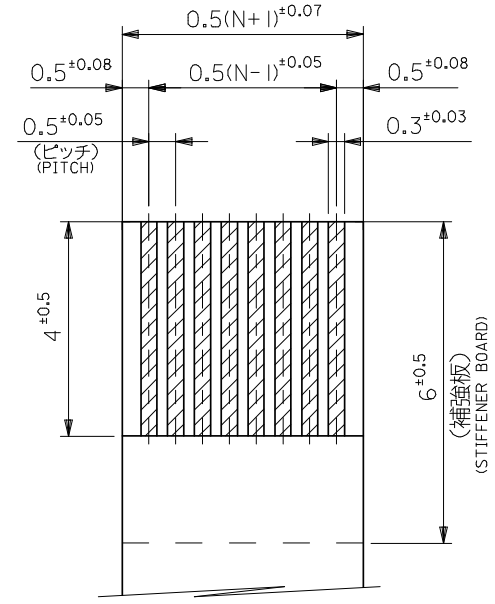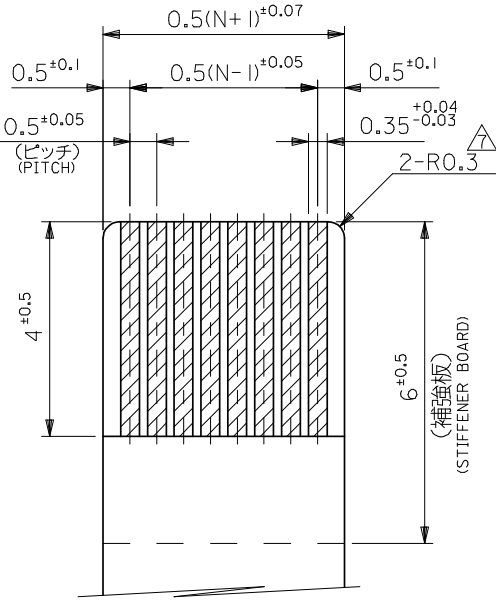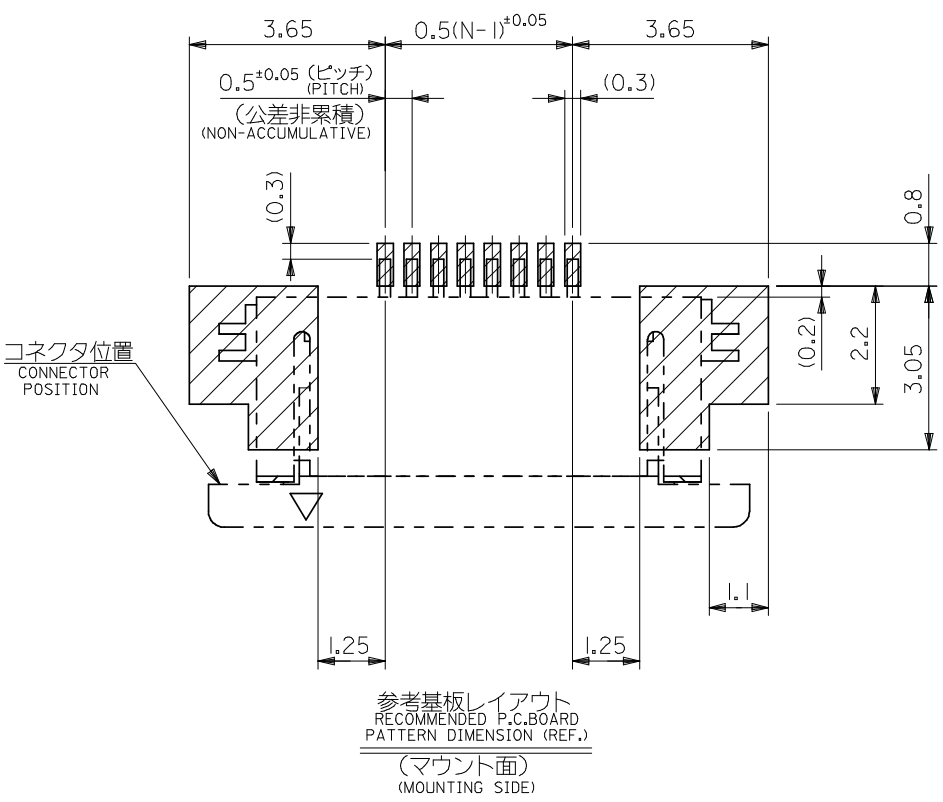

注記 NOTES

△ R0.3は、FPCの導体側にかからないこと。  
R0.3 MUST NOT BE OVERLAPPED TO PATTERN OF FPC.

適合FPC推奨寸法  
APPLICABLE FPC  
RECOMMENDED DIMENSION

(仕上がり厚さ: 0.3±0.03)  
(THICKNESS: 0.3±0.03)

FPCについて:

打抜き方向は導体側から補強板を推奨致します。  
補強フィルム材質はポリイミドを推奨致します。  
接着剤は熱硬化接着剤を推奨致します。

ABOUT FPC:

RECOMMENDED PUNCHER DIRECTION : FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.  
RECOMMENDED MATERIAL :  
STIFFENER FILM : POLYIMIDE  
BONDING AGENT : THERMOSETTING BONDING AGENT

適合FFC推奨寸法  
APPLICABLE FFC  
RECOMMENDED DIMENSION

(仕上がり厚さ: 0.3±0.03)  
(THICKNESS: 0.3±0.03)

|                                                                             |                    |                                                            |       |                                                                                                                                  |                   |                                                                          |                        |                           |  |  |
|-----------------------------------------------------------------------------|--------------------|------------------------------------------------------------|-------|----------------------------------------------------------------------------------------------------------------------------------|-------------------|--------------------------------------------------------------------------|------------------------|---------------------------|--|--|
| REVISED<br>EC NO: J2008-4308<br>DRWN:WABEI<br>CHKD:THARUYAMA<br>APPR:NUKITA | DESCRIPTION<br>REV | GENERAL TOLERANCES<br>(UNLESS SPECIFIED)                   |       | DIMENSION STYLE<br>MM ONLY                                                                                                       |                   | SCALE<br>---                                                             | DESIGN UNITS<br>METRIC | THIRD ANGLE<br>PROJECTION |  |  |
|                                                                             |                    | 10 UNDER                                                   | ±0.2  | DRAWN BY<br>HSHIMABUKURO                                                                                                         | DATE<br>'04/01/30 | TITLE<br>0.5 FPC CONN ZIF FOR SMT<br>R/A (BOTTOM CONTACT)<br>-LEAD FREE- |                        |                           |  |  |
|                                                                             |                    | 10 OVER 30 UNDER                                           | ±0.25 | CHECKED BY<br>KTOJO                                                                                                              | DATE<br>'04/01/30 |                                                                          |                        |                           |  |  |
|                                                                             |                    | 30 OVER                                                    | ±0.3  | APPROVED BY<br>MSASAO                                                                                                            | DATE<br>'04/01/30 | MOLEX INCORPORATED                                                       |                        |                           |  |  |
|                                                                             |                    | ANGULAR ±3 °                                               |       | MATERIAL NO.                                                                                                                     |                   | DOCUMENT NO.                                                             |                        | SHEET NO.                 |  |  |
|                                                                             |                    | DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS |       | SEE TABLE                                                                                                                        |                   | SD-52746-025                                                             |                        | 2 OF 2                    |  |  |
|                                                                             |                    | SIZE<br>A3                                                 |       | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX<br>INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                   |                                                                          |                        |                           |  |  |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9