

Single relay - REL-PR3-230AC/3X21 - 2903705

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug-in high-power relay with power contacts, 3 PDTs, coil voltage: 230 V AC

The figure shows version REL-PR3-24DC/3X21

Key Commercial Data

| | |
|--------------------------------------|--|
| Packing unit | 1 STK |
| GTIN |  4 046356 759175 |
| Weight per Piece (excluding packing) | 85.0 g |
| Weight per piece (including packing) | 85.0 g |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|--------|---------|
| Width | 38.6 mm |
| Height | 45.5 mm |
| Depth | 36.1 mm |

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -40 °C ... 55 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |

Coil side

| | |
|---|--|
| Nominal input voltage U_N | 230 V AC |
| Input voltage range in reference to U_N | see diagram |
| Mains frequency | 50 Hz 60 Hz |
| Typical input current at U_N | 12 mA |
| Typical response time | 5 ms ... 25 ms (depending on phase relation) |
| Typical release time range | 5 ms ... 20 ms (depending on phase relation) |
| Status display | Yellow LED |

Contact side

Single relay - REL-PR3-230AC/3X21 - 2903705

Technical data

Contact side

| | |
|--|--|
| Contact type | 3 PDTs |
| Contact material | AgNi |
| Maximum switching voltage | 440 V AC |
| | 250 V DC |
| Minimum switching voltage | 10 V (At 24 mA) |
| Min. switching current | 10 mA (at 24 V) |
| Maximum inrush current | 50 A (20 ms, N/O contact) |
| Limiting continuous current | 16 A |
| Interrupting rating (ohmic load) max. | 384 W (at 24 V DC) |
| | 124 W (at 48 V DC) |
| | 108 W (at 60 V DC) |
| | 52 W (at 110 V DC) |
| | 70 W (at 220 V DC) |
| | 4000 VA (for 250 V AC) |
| | 4000 VA (At 440 V AC) |
| Switching capacity in acc. with DIN VDE 0660/IEC 60947 | 2 A (at 24 V, DC13) |
| | 0.22 A (at 120 V, DC13) |
| | 0.11 A (at 250 V, DC13) |
| | 3 A (at 24 V, AC15) |
| | 3 A (at 120 V, AC15) |
| | 1.5 A (at 240 V, AC15) |
| 3-phase motor load | 1500 W (at 400 V, AC3) |
| Motor load according to UL 508 | 1/3 HP, 120 V AC (single-phase AC motor) |
| | 1/2 HP, 240 V AC (single-phase AC motor) |
| | 1/2 HP, 240 V AC (three-phase induction motor) |

General

| | |
|--|--|
| Test voltage relay winding/relay contact | 2.5 kV _{rms} (50 Hz, 1 min.) |
| Test voltage relay contact/relay contact | 2.5 kV _{rms} (50 Hz, 1 min.) |
| Test voltage PDT/PDT | 2.5 kV _{rms} (50 Hz, 1 min.) |
| Operating mode | 100% operating factor |
| Degree of protection | RT I |
| Mechanical service life | Approx. 10 ⁷ cycles |
| Designation | Air clearances and creepage distances between the power circuits |
| Standards/regulations | IEC 60664 |
| Rated insulation voltage | 250 V AC |
| Degree of pollution | 3 |
| Overvoltage category | III |
| Designation | Standards/regulations |
| Standards/regulations | IEC 61810 |
| Mounting position | any |

Single relay - REL-PR3-230AC/3X21 - 2903705

Technical data

Standards and Regulations

| | |
|----------------------------------|--|
| Connection in acc. with standard | CSA |
| Designation | Air clearances and creepage distances between the power circuits |
| Standards/regulations | IEC 60664 |
| Rated insulation voltage | 250 V AC |
| Insulation | Basic insulation |
| Degree of pollution | 3 |
| Overvoltage category | III |
| Designation | Standards/regulations |
| Standards/regulations | IEC 61810 |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27371104 |
| eCl@ss 4.1 | 27371104 |
| eCl@ss 5.0 | 27371001 |
| eCl@ss 5.1 | 27371001 |
| eCl@ss 6.0 | 27371001 |
| eCl@ss 7.0 | 27371001 |
| eCl@ss 8.0 | 27371601 |
| eCl@ss 9.0 | 27371601 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000196 |
| ETIM 4.0 | EC000196 |
| ETIM 5.0 | EC001437 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211916 |
| UNSPSC 7.0901 | 39121515 |
| UNSPSC 11 | 39121515 |
| UNSPSC 12.01 | 39121515 |
| UNSPSC 13.2 | 39121515 |

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized

Single relay - REL-PR3-230AC/3X21 - 2903705

Approvals

Ex Approvals

Approvals submitted

Approval details

CSA

UL Recognized

cUL Recognized


EAC

EAC


cULus Recognized

Drawings

Circuit diagram




Diagram

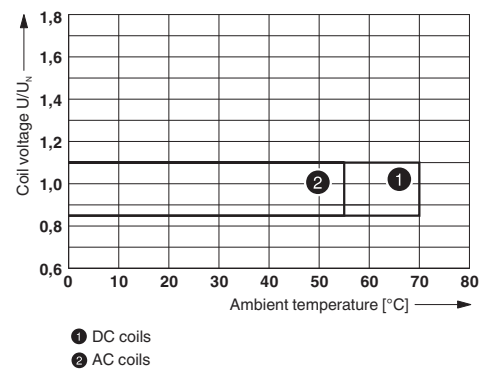


Operating voltage range

Single relay - REL-PR3-230AC/3X21 - 2903705

Diagram

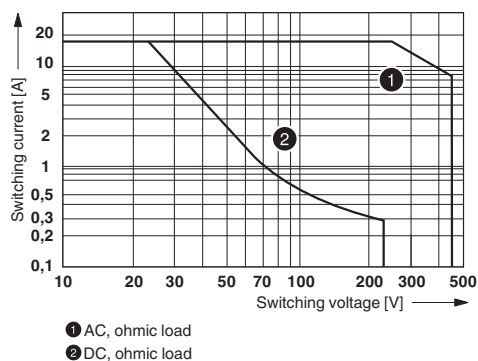

Diagram

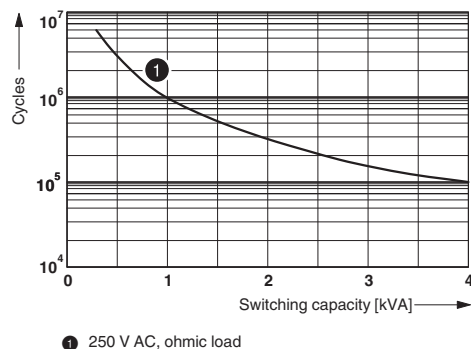

Interrupting rating

Electrical service life

Diagram



Service life reduction factor

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9