

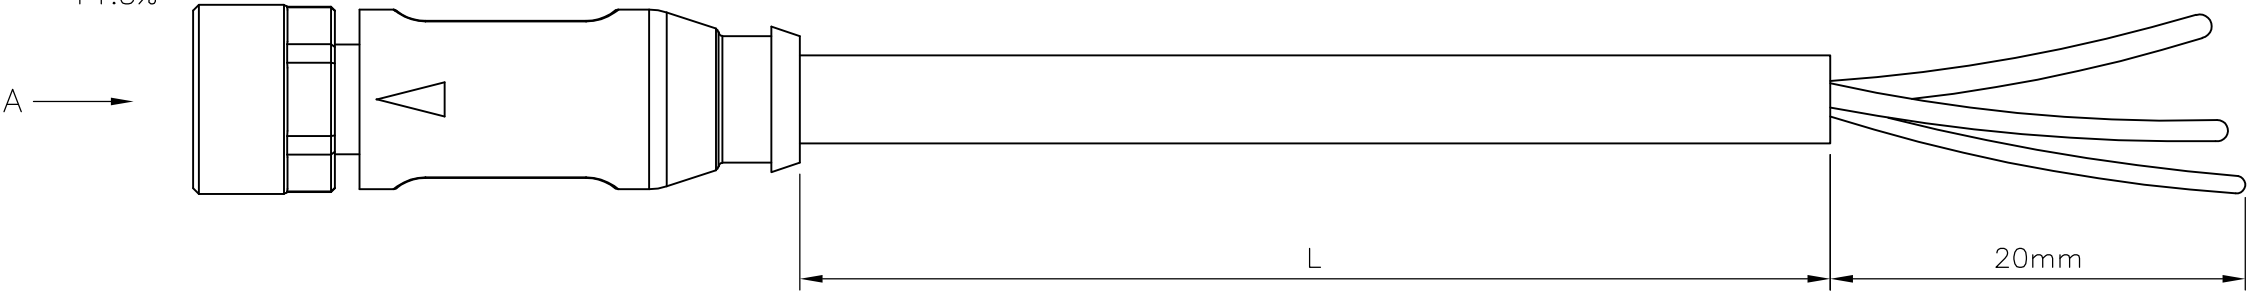





4		3		2		1																																																																																																
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		LOC		DIST		REVISIONS																																																																																														
© COPYRIGHT — By —		ALL RIGHTS RESERVED.		H		—		P	LTR	DESCRIPTION	DATE	DWN	APVD																																																																																									
NOTES: Tolerances cable lengths: 0m to 0.5m +30mm 0.5m to 1.0m +50mm 1.0m to 3.0m +100mm < 3.0m +1.5%									A	INITIAL RELEASE	12NOV2013	GSK	BvH																																																																																									
									A1	ECR-14-011671	14AUG2014	GSK	BvH																																																																																									
<table><tr><td colspan="4">TECHNICAL DATA</td></tr><tr><td>Operating voltage</td><td colspan="3">max. 60 V AC/DC</td></tr><tr><td>Operating current per contact</td><td colspan="3">max. 4 A</td></tr><tr><td>Locking of ports</td><td colspan="3">Screw thread M8 x 1 mm (recommended torque 0.4 Nm) self-securing</td></tr><tr><td>Protection</td><td colspan="3">IP65 and IP67 when plugged and screwed down (EN 60529)</td></tr></table>														TECHNICAL DATA				Operating voltage	max. 60 V AC/DC			Operating current per contact	max. 4 A			Locking of ports	Screw thread M8 x 1 mm (recommended torque 0.4 Nm) self-securing			Protection	IP65 and IP67 when plugged and screwed down (EN 60529)																																																																							
TECHNICAL DATA																																																																																																						
Operating voltage	max. 60 V AC/DC																																																																																																					
Operating current per contact	max. 4 A																																																																																																					
Locking of ports	Screw thread M8 x 1 mm (recommended torque 0.4 Nm) self-securing																																																																																																					
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)																																																																																																					
<table><tr><td colspan="4">PUR CABLE</td></tr><tr><td>No./diameter of wires</td><td colspan="3">3 x 0.25 mm²</td></tr><tr><td>Wire isolation</td><td colspan="3">PP (br, bl, bk)</td></tr><tr><td>C-track properties</td><td colspan="3">5 million</td></tr><tr><td>Jacket</td><td colspan="3">PUR (UL/CSA)</td></tr><tr><td>Outer diameter</td><td colspan="3">approx. 4.1 mm</td></tr><tr><td>Bend radius (moving)</td><td colspan="3">10 x outer diameter</td></tr><tr><td>Temperature range (fixed)</td><td colspan="3">-40...+80 °C</td></tr><tr><td>Temperature range (mobile)</td><td colspan="3">-25...+80 °C</td></tr></table>														PUR CABLE				No./diameter of wires	3 x 0.25 mm²			Wire isolation	PP (br, bl, bk)			C-track properties	5 million			Jacket	PUR (UL/CSA)			Outer diameter	approx. 4.1 mm			Bend radius (moving)	10 x outer diameter			Temperature range (fixed)	-40...+80 °C			Temperature range (mobile)	-25...+80 °C																																																							
PUR CABLE																																																																																																						
No./diameter of wires	3 x 0.25 mm²																																																																																																					
Wire isolation	PP (br, bl, bk)																																																																																																					
C-track properties	5 million																																																																																																					
Jacket	PUR (UL/CSA)																																																																																																					
Outer diameter	approx. 4.1 mm																																																																																																					
Bend radius (moving)	10 x outer diameter																																																																																																					
Temperature range (fixed)	-40...+80 °C																																																																																																					
Temperature range (mobile)	-25...+80 °C																																																																																																					
<table><tr><td colspan="4">PVC CABLE</td></tr><tr><td>No./diameter of wires</td><td colspan="3">3 x 0.25 mm²</td></tr><tr><td>Wire isolation</td><td colspan="3">PVC (br, bl, bk)</td></tr><tr><td>C-track properties</td><td colspan="3"></td></tr><tr><td>Jacket</td><td colspan="3">PVC (UL/CSA)</td></tr><tr><td>Outer diameter</td><td colspan="3">approx. 4.5 mm</td></tr><tr><td>Bend radius (moving)</td><td colspan="3">10 x outer diameter</td></tr><tr><td>Temperature range (fixed)</td><td colspan="3">-30...+80 °C</td></tr><tr><td>Temperature range (mobile)</td><td colspan="3">-5...+80 °C</td></tr></table>														PVC CABLE				No./diameter of wires	3 x 0.25 mm²			Wire isolation	PVC (br, bl, bk)			C-track properties				Jacket	PVC (UL/CSA)			Outer diameter	approx. 4.5 mm			Bend radius (moving)	10 x outer diameter			Temperature range (fixed)	-30...+80 °C			Temperature range (mobile)	-5...+80 °C																																																							
PVC CABLE																																																																																																						
No./diameter of wires	3 x 0.25 mm²																																																																																																					
Wire isolation	PVC (br, bl, bk)																																																																																																					
C-track properties																																																																																																						
Jacket	PVC (UL/CSA)																																																																																																					
Outer diameter	approx. 4.5 mm																																																																																																					
Bend radius (moving)	10 x outer diameter																																																																																																					
Temperature range (fixed)	-30...+80 °C																																																																																																					
Temperature range (mobile)	-5...+80 °C																																																																																																					
<table><tr><td colspan="2">3 pos</td><td>10mtr</td><td rowspan="4">PVC</td><td rowspan="4">Black</td><td>1-2273001-4</td><td>3x22AWG PVC 10.0m</td><td>8</td></tr><tr><td colspan="2"></td><td>5mtr</td><td>1-2273001-3</td><td>3x22AWG PVC 5.0m</td><td>7</td></tr><tr><td colspan="2"></td><td>3mtr</td><td>1-2273001-2</td><td>3x22AWG PVC 3.0m</td><td>6</td></tr><tr><td colspan="2"></td><td>1.5mtr</td><td>1-2273001-1</td><td>3x22AWG PVC 1.5m</td><td>5</td></tr><tr><td colspan="2">3 pos</td><td>10mtr</td><td rowspan="4">PUR</td><td rowspan="4">Black</td><td>2273001-4</td><td>3x22AWG PUR 10.0m</td><td>4</td></tr><tr><td colspan="2"></td><td>5mtr</td><td>2273001-3</td><td>3x22AWG PUR 5.0m</td><td>3</td></tr><tr><td colspan="2"></td><td>3mtr</td><td>2273001-2</td><td>3x22AWG PUR 3.0m</td><td>2</td></tr><tr><td colspan="2"></td><td>1.5mtr</td><td>2273001-1</td><td>3x22AWG PUR 1.5m</td><td>1</td></tr><tr><td colspan="2"></td><td>LENGTH</td><td>MATERIAL</td><td>JACKET COLOR</td><td>TE PN</td><td>DESCRIPTION</td><td>ITEM</td></tr></table>														3 pos		10mtr	PVC	Black	1-2273001-4	3x22AWG PVC 10.0m	8			5mtr	1-2273001-3	3x22AWG PVC 5.0m	7			3mtr	1-2273001-2	3x22AWG PVC 3.0m	6			1.5mtr	1-2273001-1	3x22AWG PVC 1.5m	5	3 pos		10mtr	PUR	Black	2273001-4	3x22AWG PUR 10.0m	4			5mtr	2273001-3	3x22AWG PUR 5.0m	3			3mtr	2273001-2	3x22AWG PUR 3.0m	2			1.5mtr	2273001-1	3x22AWG PUR 1.5m	1			LENGTH	MATERIAL	JACKET COLOR	TE PN	DESCRIPTION	ITEM																													
3 pos		10mtr	PVC	Black	1-2273001-4	3x22AWG PVC 10.0m	8																																																																																															
		5mtr			1-2273001-3	3x22AWG PVC 5.0m	7																																																																																															
		3mtr			1-2273001-2	3x22AWG PVC 3.0m	6																																																																																															
		1.5mtr			1-2273001-1	3x22AWG PVC 1.5m	5																																																																																															
3 pos		10mtr	PUR	Black	2273001-4	3x22AWG PUR 10.0m	4																																																																																															
		5mtr			2273001-3	3x22AWG PUR 5.0m	3																																																																																															
		3mtr			2273001-2	3x22AWG PUR 3.0m	2																																																																																															
		1.5mtr			2273001-1	3x22AWG PUR 1.5m	1																																																																																															
		LENGTH	MATERIAL	JACKET COLOR	TE PN	DESCRIPTION	ITEM																																																																																															
<table><tr><td colspan="4">THIS DRAWING IS A CONTROLLED DOCUMENT.</td><td colspan="2">DWN 12NOV2013 SATHISH KUMAR .G</td><td colspan="2" rowspan="2"> TE Connectivity</td></tr><tr><td colspan="2">DIMENSIONS: mm</td><td colspan="2">TOLERANCES UNLESS OTHERWISE SPECIFIED:</td><td colspan="2">CHK 12NOV2013 B.VELDHOVEN</td></tr><tr><td rowspan="3"></td><td colspan="2">0 PLC ± -</td><td colspan="2">APVD 12NOV2013 A.VAN ZANDVOORT</td><td colspan="3" rowspan="3">NAME M8 X 1.0 STRAIGHT SOCKET PIGTAIL</td></tr><tr><td colspan="2">1 PLC ± -</td><td colspan="2">PRODUCT SPEC 108-19483</td></tr><tr><td colspan="2">2 PLC ± -</td><td colspan="2">APPLICATION SPEC 114-32127</td></tr><tr><td colspan="2">3 PLC ± -</td><td colspan="2"></td><td colspan="2">SIZE</td><td>CAGE CODE</td><td>DRAWING NO</td><td>RESTRICTED TO</td></tr><tr><td colspan="2">4 PLC ± -</td><td colspan="2"></td><td colspan="2">WEIGHT</td><td colspan="2">A300779</td><td>C-2273001</td><td>—</td></tr><tr><td colspan="2">ANGLES ± -</td><td colspan="2"></td><td colspan="6">CUSTOMER DRAWING</td></tr><tr><td colspan="2">FINISH</td><td colspan="2"></td><td colspan="6">SCALE NTS</td></tr><tr><td colspan="2">MATERIAL</td><td colspan="2"></td><td colspan="6">SHEET 1 OF 1</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="6">REV A1</td></tr></table>														THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN 12NOV2013 SATHISH KUMAR .G		 TE Connectivity		DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK 12NOV2013 B.VELDHOVEN			0 PLC ± -		APVD 12NOV2013 A.VAN ZANDVOORT		NAME M8 X 1.0 STRAIGHT SOCKET PIGTAIL			1 PLC ± -		PRODUCT SPEC 108-19483		2 PLC ± -		APPLICATION SPEC 114-32127		3 PLC ± -				SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO	4 PLC ± -				WEIGHT		A300779		C-2273001	—	ANGLES ± -				CUSTOMER DRAWING						FINISH				SCALE NTS						MATERIAL				SHEET 1 OF 1										REV A1					
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN 12NOV2013 SATHISH KUMAR .G		 TE Connectivity																																																																																																
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK 12NOV2013 B.VELDHOVEN																																																																																																		
	0 PLC ± -		APVD 12NOV2013 A.VAN ZANDVOORT		NAME M8 X 1.0 STRAIGHT SOCKET PIGTAIL																																																																																																	
	1 PLC ± -		PRODUCT SPEC 108-19483																																																																																																			
	2 PLC ± -		APPLICATION SPEC 114-32127																																																																																																			
3 PLC ± -				SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO																																																																																														
4 PLC ± -				WEIGHT		A300779		C-2273001	—																																																																																													
ANGLES ± -				CUSTOMER DRAWING																																																																																																		
FINISH				SCALE NTS																																																																																																		
MATERIAL				SHEET 1 OF 1																																																																																																		
				REV A1																																																																																																		


VIEW 'A'



Contact Layout Female

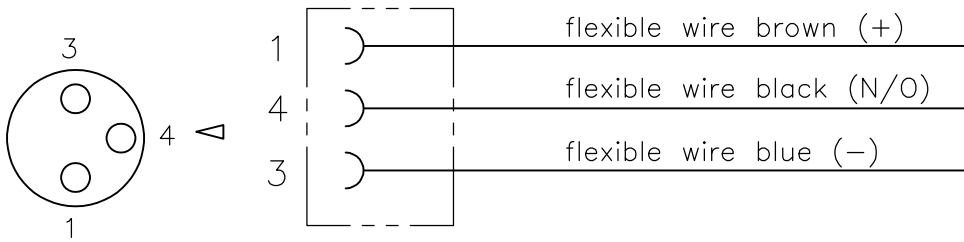

Schematic diagram

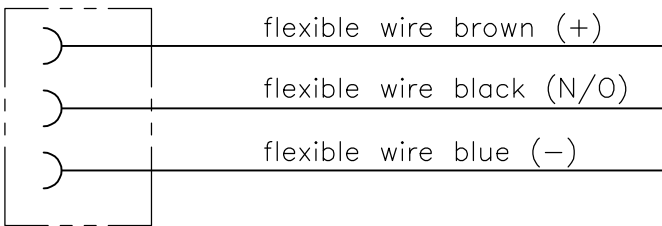

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9