

ATC 800 B Series NPO Ceramic, High RF Power Ultra-Low ESR Multilayer Capacitors

- Case B Size (.110" x .110")
- Rugged, reliable NPO dielectric
- Case optimized for highest self resonant frequency
- Capacitance Range 0.1 pF to 1000 pF
- Lowest ESR
- Capable of highest RF Power
- RoHS Compliant / Lead-Free

ATC's 800 B Series offers superb performance in demanding high RF power applications requiring consistent and reliable operation. The combination of highly conductive metal electrode systems, optimized case geometries, and proprietary dielectrics, yields the lowest ESR. ATC's new NPO low loss rugged dielectrics are designed to provide superior heat transfer in high RF power applications. Ultra-low ESR and superior thermal performance insure that the 800 B Series products are your best choice for high RF power applications from VHF through microwave frequencies.

Typical applications: VHF / UHF / HDTV Broadcast Transmitters, Wireless Communications, Public Safety Radio, Avionics, Telecom, WiMAX, Microwave Communication Systems and Satellite Systems.

Typical circuit applications: High RF Power Filter Networks, Combiners, Couplers, Matching Networks, Output Coupling, Antenna Coupling, and DC Blocking and Bypassing.

ENVIRONMENTAL TESTS

ATC 800 B Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A

MOISTURE RESISTANCE:


MIL-STD-202, Method 106

LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C 200% WVDC applied

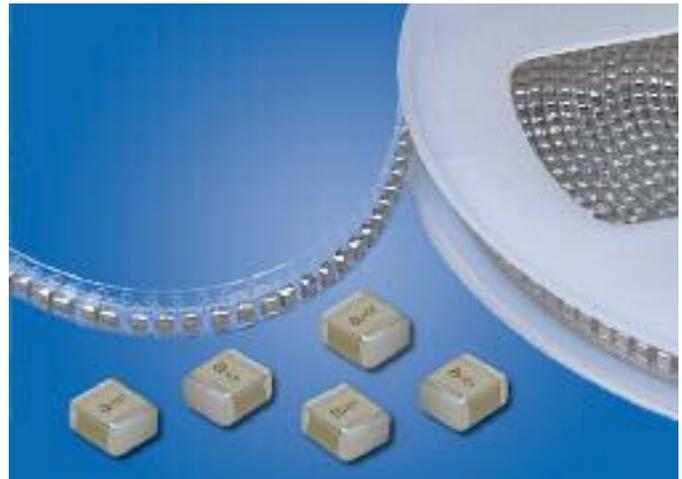

ELECTRICAL AND MECHANICAL SPECIFICATIONS

QUALITY FACTOR (Q): > 2000 @ 1 MHz

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):
0 ±30 PPM/°C (-55°C to +125°C)

INSULATION RESISTANCE (IR):

0.1 pF to 1000 pF:
10⁵ Megohms min. @ +25°C at rated WVDC
10⁴ Megohms min. @ +125°C at rated WVDC

WORKING VOLTAGE (WVDC):

See Capacitance Values Table, page 2

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

Case B: 250% of rated WVDC for 5 secs

RETRACE: Less than ±(0.02% or 0.02 pF), whichever is greater

AGING EFFECTS: None

PIEZOELECTRIC EFFECTS:

None
(No capacitance variation with voltage or pressure)

CAPACITANCE DRIFT: ±(0.02% or 0.02 pF), whichever is greater

OPERATING TEMPERATURE RANGE:

From -55°C to +125°C (No derating of working voltage)

TERMINATION STYLES:

RoHS Compliant and Solder Plate
See Mechanical Configurations, page 3

TERMINAL STRENGTH: Terminations for chips withstand a pull of 5 lbs. min., 15 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



AMERICAN
ATC North America
sales@atceramics.com

TECHNICAL
ATC Europe
sales@atceramics.com

CERAMICS
ATC Asia
sales@atceramics-asia.com

 **THE ENGINEERS' CHOICE®**
ISO 9001 REGISTERED COMPANY

THE ENGINEERS' CHOICE™

www.atceramics.com

ATC 800 B Capacitance Values

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC
0R1	0.1	B	500	2R4	2.4	B, C, D	500	200	20	F, G, J, K, M	500	151	150	F, G, J, K, M	300
0R2	0.2	B, C		2R7	2.7			220	22			161	160		
0R3	0.3			3R0	3.0			240	24			181	180		
0R4	0.4	B, C, D		3R3	3.3			270	27			201	200		
0R5	0.5			3R6	3.6			300	30			221	220		
0R6	0.6			3R9	3.9			330	33			241	240		
0R7	0.7			4R3	4.3			360	36			271	270		
0R8	0.8			4R7	4.7			390	39			301	300		
0R9	0.9			5R1	5.1			430	43			331	330		
1R0	1.0			5R6	5.6			470	47			361	360		
1R1	1.1		6R2	6.2	510	51	391	390							
1R2	1.2	B, C, D	6R8	6.8	560	56	431	430							
1R3	1.3		7R5	7.5	620	62	471	470							
1R4	1.4	F, G, J, K, M	8R2	8.2	680	68	511	510							
1R5	1.5		9R1	9.1	750	75	561	560							
1R6	1.6		100	10	820	82	621	620							
1R7	1.7		110	11	910	91	681	680							
1R8	1.8		120	12	101	100	751	750							
1R9	1.9		130	13	111	110	821	820							
2R0	2.0		150	15	121	120	911	910							
2R1	2.1		160	16	131	130	102	1000							
2R2	2.2	180	18												

VRMS = 0.707 X WVDC

• SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE. PLEASE CONSULT FACTORY.

ATC PART NUMBER CODE

ATC800 B 91 0 J T 500 X T

Series _____

Case Size _____

Capacitance Code: _____
 First 2 significant digits for capacitance.
 R=Decimal Point

Indicates number of zeros following digits of capacitance in picofarads except for decimal values. _____

Capacitance Tolerance _____

Packaging
 T - Tape & Reel: 500 and 1000 pc. qty. std.*
 TV - Vertical Orientation of Product, Tape & Reel: 500 and 1000 pc. qty. std.*
 I - Special Packaging. Consult Factory.
 *Consult ATC for other quantities

Laser Marking
 WVDC
 Termination Code

CAPACITANCE TOLERANCE								
Code	B	C	D	F	G	J	K	M
Tol.	±0.1 pF	±0.25 pF	±0.5 pF	±1%	±2%	±5%	±10%	±20%

The above part number refers to a 800 B Series (case size B) 91 pF capacitor, J tolerance (±5%), 500 WVDC, with T termination (Tin Plated over Nickel Barrier Termination, RoHS Compliant), laser marking and tape and reel packaging.

ATC accepts orders for our parts using designations *with* or *without* the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.

Consult factory for additional performance data.

ATC 800 B Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS Inches (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIAL
800B	T	B Solderable Nickel Barrier		.110 +.020 -.010 (2.79 +0.51 -0.25)	.110 ±.015 (2.79 ±0.38)	.070 (1.78) max.	.015 (0.38) ±.010 (0.25)	RoHS Compliant Tin Plated over Nickel Barrier Termination
800B	W	B Solder Plate		.110 +.020 -.010 (2.79 +0.51 -0.25)	.110 ±.015 (2.79 ±0.38)	.070 (1.78) max.	.015 (0.38) ±.010 (0.25)	Tin/Lead Solder Plated over Nickel Barrier Termination

ATC 800 B Capacitors: Non-Magnetic Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS Inches (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIAL
800B	TN	B Non-Mag Solderable Barrier		.110 +.020 -.010 (2.79 +0.51 -0.25)	.110 ±.015 (2.79 ±0.38)	.070 (1.78) max.	.015 (0.38) ±.010 (0.25)	RoHS Compliant Tin Plated over Non-Magnetic Barrier Termination

Suggested Mounting Pad Dimensions

Case B Vertical Mount

Cap Value	Pad Size	A Min	B Min	C Min	D Min
All Values	Normal	.090 (2.29)	.050 (1.27)	.075 (1.91)	.175 (4.45)
	High Density	.070 (1.78)	.030 (.762)	.075 (1.91)	.135 (3.43)

Horizontal
Electrode Orientation



Vertical
Electrode Orientation

Case B Horizontal Mount

Cap Value	Pad Size	A Min	B Min	C Min	D Min
All Values	Normal	.130 (3.30)	.050 (1.27)	.075 (1.91)	.175 (4.45)
	High Density	.110 (2.79)	.030 (.762)	.075 (1.91)	.135 (3.43)

inches (mm)

ATC 800 B Performance Data

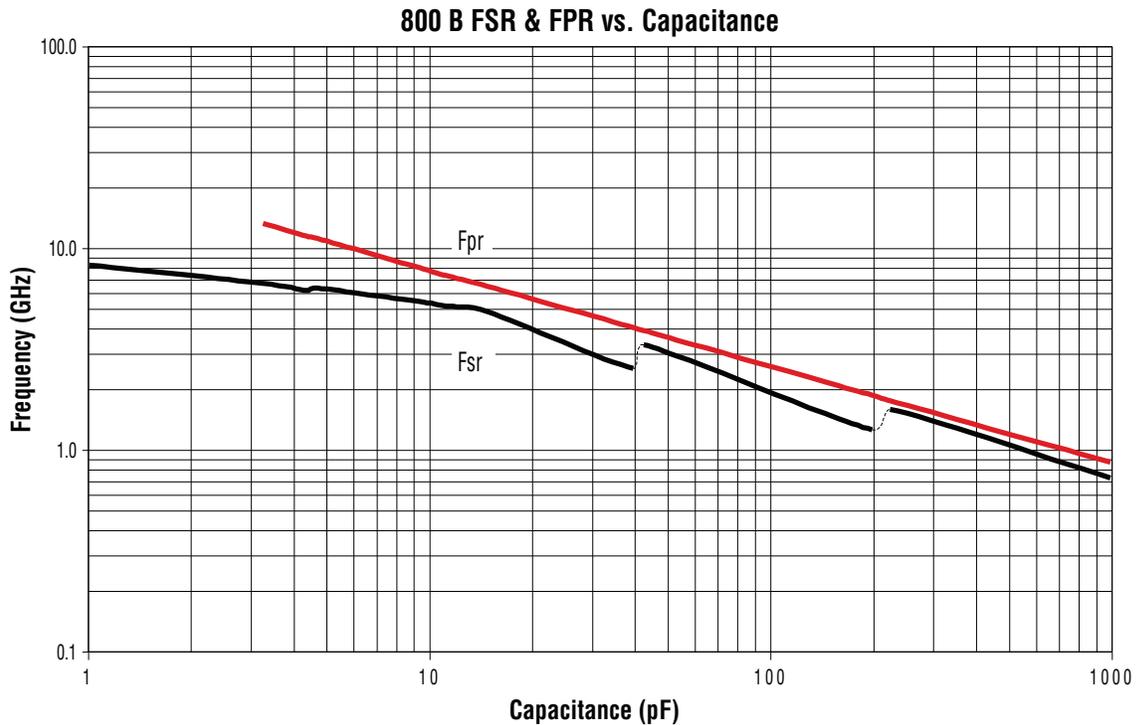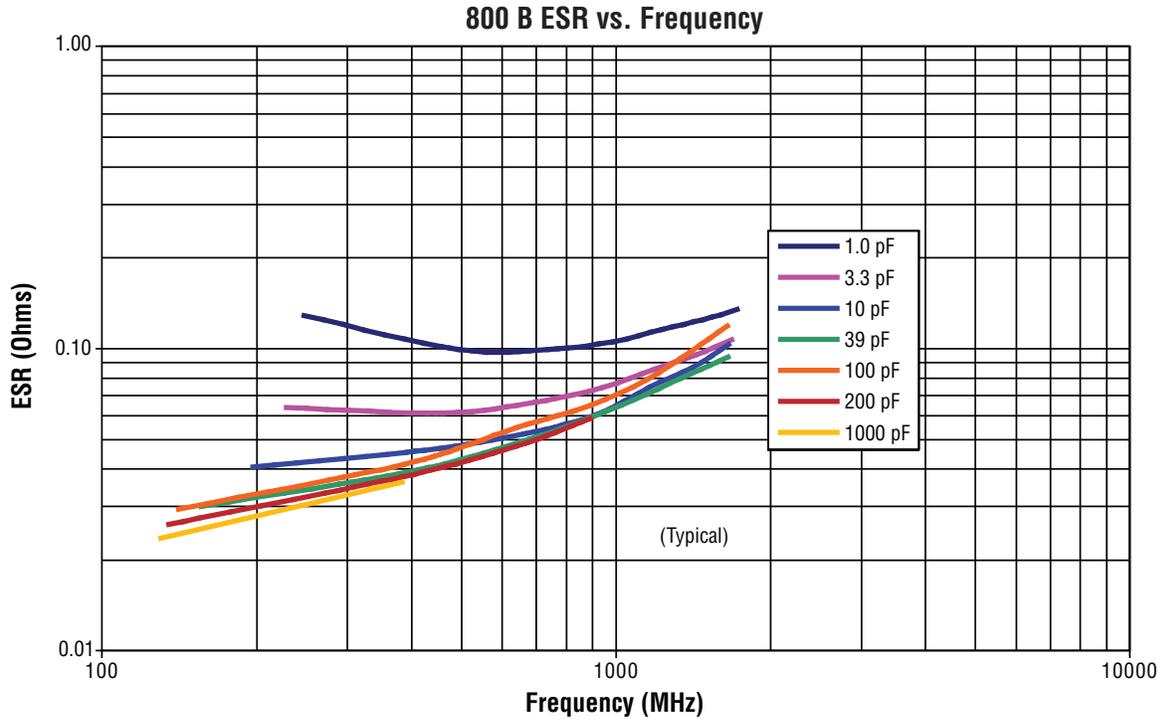

ATC 800 B Series Data Sheet Test Condition Description

Capacitors vertically mounted in series microstrip configuration on 23.3-mil thick Rogers RO4350[®] softboard, 52-mils wide 1/2 oz. Cu traces.

FSR = lowest frequency at which S11 response, referenced at capacitor edge, crosses real axis on Smith Chart.

FPR = lowest frequency at which there is a notch in S21 magnitude response.


A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

ATC 800 B Performance Data

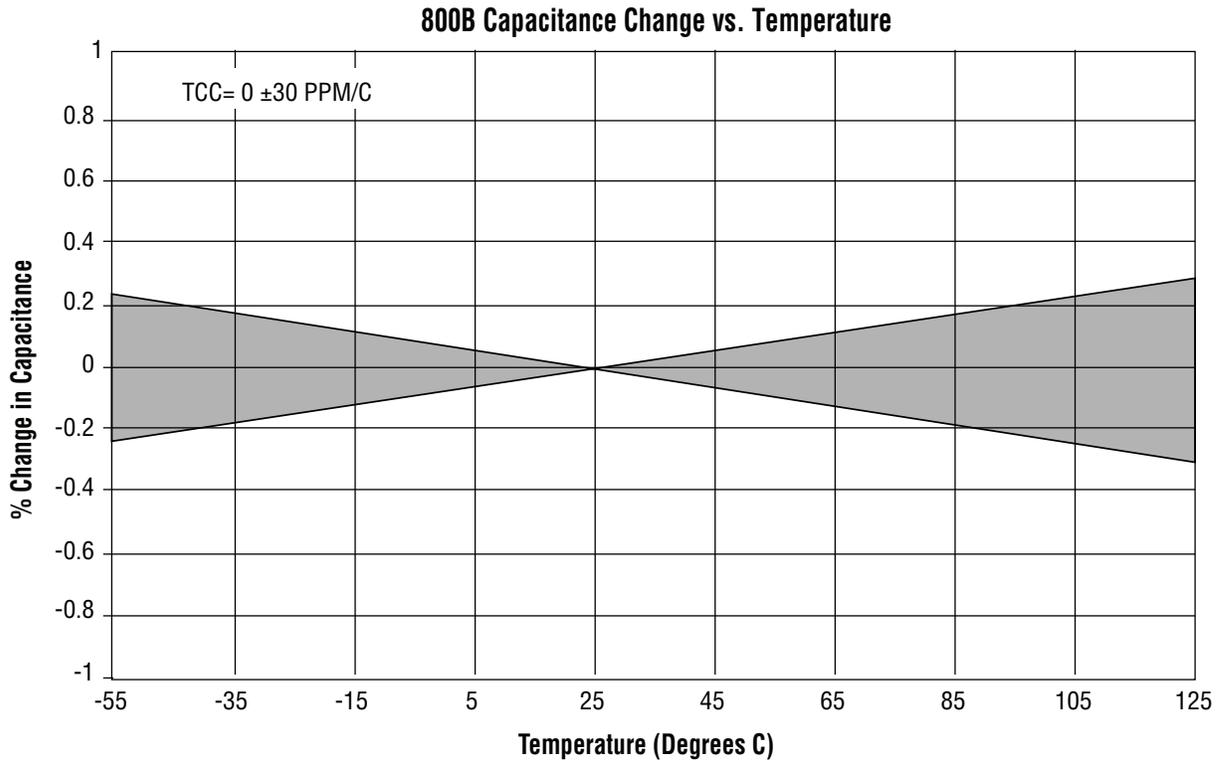

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. B; 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 2006 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-1033 Rev. I, 6/13

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
saleseur@atceramics.com

ATC Asia
sales@atceramics-asia.com

www.atceramics.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

American Technical Ceramics (ATC):

[800B120GT500XT](#) [800B150GT500XT](#) [800B220GT500XT](#) [800B100FT500XT](#) [800B4R7CT500XT](#) [800B6R8JT500XT](#)
[800B330FT500XT](#) [800B101FT500XT](#) [800B8R2BT500XT](#) [800B180FT500XT](#) [800B102JT50XT](#) [800B3R3CT500XT](#)
[800B220JT500XT](#) [800B270JT500XT](#) [800B560JT500XT](#) [800B5R6BT500XT](#) [800B101GT500XT](#) [800B7R5BT500XT](#)
[800B8R2CT500XT](#) [800B470FT500XT](#) [800B2R0BT500XT](#) [800B1R5BT500XT](#) [800B102KT50XT](#) [800B102JW50XT](#)
[800B5R6CT500XT](#) [800B0R5BT500XT](#) [800B2R0CT500XT](#) [800B151JT300XT](#) [800B3R9BT500XT](#) [800B471JT200XT](#)
[800B6R8BT500XT](#) [800B120JT500XT](#) [800B2R7BT500XT](#) [800B8R2JT500XT](#) [800B6R8CT500XT](#) [800B9R1BT500XT](#)
[800B5R1CT500XT](#) [800B120FT500XT](#) [800B1R2BT500XT](#) [800B0R8BT500XT](#) [800B221JT200XT](#) [800B150JT500XT](#)
[800B180GT500XT](#) [800B150FT500XT](#) [800B220FT500XT](#) [800B2R7CT500XT](#) [800B3R3BT500XT](#) [800B3R9CT500XT](#)
[800B6R2BT500XT](#) [800B2R4BT500XT](#) [800B100GT500XT](#) [800B2R2BT500XT](#) [800B4R7BT500XT](#) [800B7R5CT500XT](#)
[800B3R0BT500XT](#) [800B3R6BT500XT](#) [800B6R2CT500XT](#) [800B101JT500XT](#) [800B1R0BT500XT](#)
[800B1R8BT500XT](#) [800B5R1BT500XT](#) [800B100JT500XT](#) [800B220JW500XT](#) [800B220KT500XT](#) [800B220KW500XT](#)
[800B220MT500XT](#) [800B220MW500XT](#) [800B221FT200XT](#) [800B221FW200XT](#) [800B221GT200XT](#)
[800B221GW200XT](#) [800B221JW200XT](#) [800B221KT200XT](#) [800B221KW200XT](#) [800B221MT200XT](#)
[800B221MW200XT](#) [800B240FT500XT](#) [800B240FW500XT](#) [800B240GT500XT](#) [800B240GW500XT](#) [800B240JT500XT](#)
[800B240JW500XT](#) [800B240KT500XT](#) [800B240KW500XT](#) [800B240MT500XT](#) [800B240MW500XT](#)
[800B241FT200XT](#) [800B241FW200XT](#) [800B241GT200XT](#) [800B241GW200XT](#) [800B241JT200XT](#) [800B241JW200XT](#)
[800B241KT200XT](#) [800B241KW200XT](#) [800B241MT200XT](#) [800B241MW200XT](#) [800B270FT500XT](#)
[800B270FW500XT](#) [800B270GT500XT](#) [800B270GW500XT](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9