


Surface Mount Basic Pressure Sensors

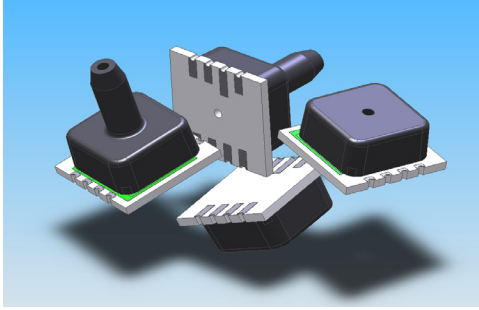

Features

- 5 inH2O Full Scale to 100 psi Full Scale Pressures
- 0.5 % linearity
- Small LCC Footprint
- ROHS Compliant

Applications


- Medical Instrumentation
- Environmental Controls
- HVAC

General Description


The BASIC Series of pressure sensors use a silicon micromachined (MEMS) pressure sensor in the most basic configuration. The package is a ceramic surface mount configuration to provide the smallest footprint possible. Best temperature compensation is realized when the sensor has a constant current excitation. This series is intended for use with non-corrosive, non-ionic working fluids such as air, dry gases and the like. Specifications are written for constant voltage of 3.0 volts. The output of the device is ratiometric to the supply voltage.

Physical Dimensions

LP Package

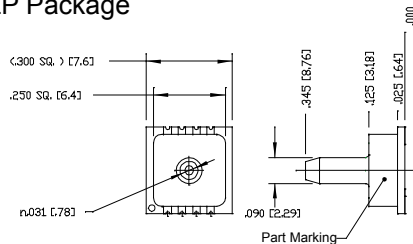



LF Package

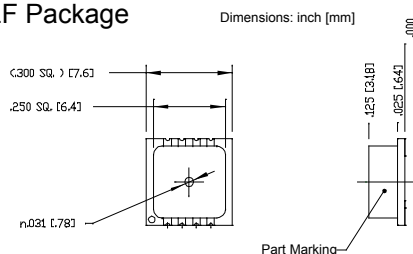

PART MARKING

L05G - 5 inH2O
L10G - 10 inH2O
001G - 1 PSIG
005G - 5 PSIG
015G - 15 PSIG
015A - 15 PSIA
030G - 30 PSIG
060G - 60 PSIG
100G - 100 PSIG

Equivalent Circuit

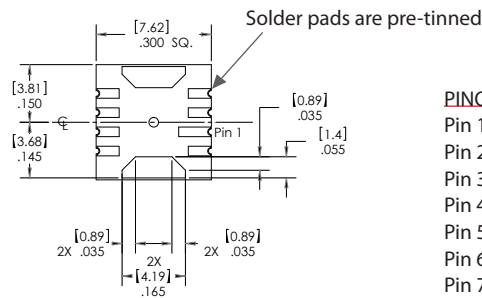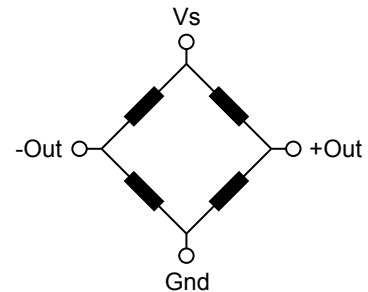

PINOUT

Pin 1: Vs
Pin 2: +out
Pin 3: N.C. Reserved
Pin 4: N.C. Reserved
Pin 5: N.C. Reserved
Pin 6: N.C. Reserved
Pin 7: -out
Pin 8: Gnd

Approvals

MKT	DATE	MFG	DATE	ENG	DATE	QA	DATE
☐ As Is ☐ With Change		☐ As Is ☐ With Change		☐ As Is ☐ With Change		☐ As Is ☐ With Change	

Pressure Sensor Characteristics Maximum Ratings

Supply Voltage VS	6 Vdc
Lead Temperature (soldering 2-4 sec.)	270°C

Environmental Specifications

Temperature Ranges	
Operating	-25 to 85° C
Storage	-40 to 125° C
Humidity Limits	0 to 95% RH (non condensing)

Standard Pressure Ranges

Ported	Non-ported	Sensitivity ⁽¹⁾				
Part Number	Part Number	Operating Pressure	Nominal	Std Dev.	Units	Proof Pressure
CSM-L05G-LP	CSM-L05G-LF	0 - 5 inH2O	8.40	±1.10	mV/inH2O	3 PSI
CSM-L10G-LP	CSM-L10G-LF	0 - 10 inH2O	1.65	±0.19	mV/inH2O	3 PSI
CSM-001G-LP	CSM-001G-LF	0 - 1 PSI	22.8	±2.60	mV/PSI	5 PSI
CSM-005G-LP	CSM-005G-LF	0 - 5 PSI	12.0	±1.50	mV/PSI	15 PSI
CSM-015G-LP	CSM-015G-LF	0 - 15 PSI	4.40	±0.58	mV/PSI	45 PSI
CSM-015A-LP	CSM-015A-LF	0 - 15 PSIA	4.40	±0.58	mV/PSI	30 PSI
CSM-030G-LP	CSM-030G-LF	0 - 30 PSI	2.30	±0.30	mV/PSI	100 PSI
CSM-100G-LP	CSM-100G-LF	0 - 100 PSI	0.96	±0.13	mV/PSI	200 PSI

Common Performance Characteristic

Parameter ⁽¹⁾	Minimum	Nominal	Maximum	Units
Offset Voltage	--	±1.0	±5.0	mv
Temperature Effect on Offset ⁽²⁾	--	±3	--	uV/V/°C
Temperature Effect on Resistance ^(2,6)	2300	2600	3300	ppm/°C
Temperature Effect on Span ^(2,6)	-1700	-2200	-2700	ppm/°C
Linearity error ^(4,6)	--	±0.2	±0.5	% FSS
Hysteresis error ⁽⁶⁾	--	±0.01	±0.05	% FSS
Position Sensitivity (BST-L10G-xx) ⁽⁶⁾	--	±0.01	±0.03	% FSS
Input Resistance ⁽⁶⁾	2.7	3.3	4.0	kohms
Output Resistance ⁽⁶⁾	2.7	3.3	4.0	kohms
Long term stability of span ⁽³⁾	--	0.1	--	% FSS

Specification Notes

NOTE 1: ALL PARAMETERS ARE MEASURED AT 3.0 VOLT EXCITATION, FOR THE NOMINAL FULL SCALE PRESSURE AND ROOM TEMPERATURE UNLESS OTHERWISE SPECIFIED. PRESSURE MEASUREMENTS ARE WITH POSITIVE PRESSURE TO THE SINGLE PORT CONFIGURATION.

NOTE 2: SHIFT IS RELATIVE TO 25°C.

NOTE 3: SHIFT IS WITHIN THE FIRST YEAR OF OPERATION.

NOTE 4: MEASURED AT ONE-HALF FULL SCALE RATED PRESSURE USING BEST STRAIGHT LINE CURVE FIT.

NOTE 5: THE SPAN IS THE ALGEBRAIC DIFFERENCE BETWEEN FULL SCALE OUTPUT VOLTAGE AND THE OFFSET VOLTAGE.

NOTE 6: PARAMETER IS CHARACTERIZED AND NOT 100% TESTED. MINIMUM AND MAXIMUM VALUES INDICATED AS A DESIGN REFERENCE.

All Sensors reserves the right to make changes to any products herein. All Sensors does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9