


PK SERIES

85°C Standard

*Load Life : 85°C 2000 hours.

RoHS
compliance

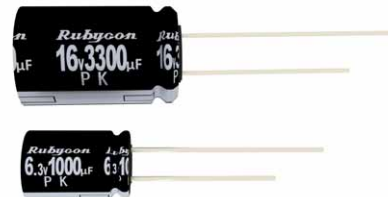

◆SPECIFICATIONS

Items	Characteristics	
Category Temperature Range	-40~+85°C	-25~+85°C
Rated Voltage Range	6.3~400Vdc	450Vdc
Capacitance Tolerance	±20%(20°C, 120Hz)	
Leakage Current(MAX)	6.3~100Vdc	160~450Vdc
	I=0.01CV or 3µA whichever is greater. (After 2 minutes application of rated voltage)	CV≤1000
		I=0.1CV+40µA (1minute) I=0.03CV+15µA (5minutes)
		CV>1000 I=0.04CV+100µA (1minute) I=0.02CV+25µA (5minutes)
Dissipation Factor(MAX) (tanδ)	I=Leakage Current(µA)	C=Capacitance(µF) V=Rated Voltage(Vdc)
	Rated Voltage (Vdc)	6.3 10 16 25 35 50 63 100 160 200 250 350 400 450 (20°C, 120Hz)
	tanδ	0.28 0.24 0.20 0.16 0.14 0.12 0.10 0.10 0.20 0.20 0.20 0.25 0.25 0.25
When capacitance is over 1000µF, tanδ shall be added 0.02 to the listed value with increase of every 1000µF.		
Endurance	After applying rated voltage with rated ripple current for 2000 hours at 85°C, the capacitors shall meet the following requirements.	
	Capacitance Change	Within ±25% of the initial value.
	Dissipation Factor	Not more than 200% of the specified value.
	Leakage Current	Not more than the specified value.
Low Temperature Stability Impedance Ratio(MAX)	Rated Voltage (Vdc)	6.3 10 16 25 35 50 63 100 160 200 250 350 400 450 (120Hz)
	Z(-25°C)/Z(20°C)	5 4 3 2 2 2 2 2 3 3 4 5 5 7
	Z(-40°C)/Z(20°C)	12 10 8 5 4 3 3 3 4 4 8 8 10 -

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency (Hz)	60(50)	120	500	1k	10k≤
Coefficient	0.47~1µF	0.50	1.00	1.20	1.30 1.50
	2.2~4.7µF	0.65	1.00	1.20	1.30 1.50
	10~47µF	0.80	1.00	1.20	1.30 1.50
	100~1000µF	0.80	1.00	1.10	1.15 1.20
	2200~33000µF	0.80	1.00	1.05	1.10 1.15

◆OPTION

	Code
PET Sleeve	EFC

◆DIMENSIONS

(mm)

Technical drawing of a capacitor showing side and top views with dimensions.

Side View Dimensions:

- SLEEVE(PET):** Label for the sleeve component.
- ϕd :** Lead diameter.
- $L + \alpha$ MAX:** Total length of the capacitor.
- 15MIN:** Minimum length of the sleeve.
- 4MIN:** Minimum length of the lead.

Top View Dimensions:

- ϕD :** Case diameter.
- $\phi D + 0.5$ MAX:** Maximum diameter of the lead exit area.
- F :** Case height.
- ± 0.5 :** Tolerance for the case height F .

Orientation: The drawing includes a $\oplus$ (positive) and $\ominus$ (negative) polarity symbol.

ϕD	5	6.3	8	10	12.5	16	18
ϕd	0.5		0.6			0.8	
F	2.0	2.5	3.5	5.0		7.5	
α	$V_{dc} \leq 100 : \alpha = 1.5$ $V_{dc} \geq 160 : \alpha = 2.0$					2.0	

◆PART NUMBER

□□□ PK □□□□□ M □□□ □□ D×L
 Rated Voltage Series Capacitance Capacitance Tolerance Option Lead Forming Case Size

◆ **STANDARD SIZE**

Size $\phi D \times L$ (mm), Rated Ripple Current (mA r.m.s./85°C, 120Hz)[illegible][illegible]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Rubycon:

[100PK1000MEFC18X31.5](#) [100PK100MEFC10X16](#) [100PK10MEFC5X11](#) [100PK1MEFC5X11](#)
[100PK220MEFC12.5X20](#) [100PK22MEFC6.3X11](#) [63PK680MEFC12.5X25](#) [63PK22MEFC5X11](#) [63PK3300MEFC18X40](#)
[63PK330MEFC10X20](#) [63PK33MEFC6.3X11](#) [63PK470MEFC12.5X20](#) [63PK47MEFC6.3X11](#) [6.3PK680MEFC6.3X11](#)
[63PK1000MEFC16X25](#) [63PK100MEFC8X11.5](#) [63PK10MEFC5X11](#) [63PK2200MEFC18X31.5](#) [63PK220MEFC10X16](#)
[6.3PK33000MEFC18X40](#) [6.3PK3300MEFC10X20](#) [6.3PK330MEFC6.3X11](#) [6.3PK4700MEFC12.5X20](#)
[6.3PK470MEFC6.3X11](#) [6.3PK6800MEFC12.5X25](#) [6.3PK10000MEFC16X25](#) [6.3PK1000MEFC8X11.5](#)
[6.3PK15000MEFC16X31.5](#) [6.3PK22000MEFC16X35.5](#) [6.3PK2200MEFC10X16](#) [6.3PK220MEFC5X11](#)
[50PK3R3MEFC5X11](#) [50PK4700MEFC18X40](#) [50PK470MEFC10X20](#) [50PK47MEFC6.3X11](#) [50PK4R7MEFC5X11](#)
[50PK680MEFC12.5X20](#) [50PK220MEFC10X12.5](#) [50PK22MEFC5X11](#) [50PK2R2MEFC5X11](#) [50PK3300MEFC18X31.5](#)
[50PK330MEFC10X16](#) [50PK33MEFC5X11](#) [450PK4R7MEFC10X12.5](#) [50PK1000MEFC12.5X25](#)
[50PK100MEFC8X11.5](#) [50PK10MEFC5X11](#) [50PK1MEFC5X11](#) [50PK2200MEFC16X31.5](#) [450PK1MEFC6.3X11](#)
[450PK22MEFC12.5X25](#) [450PK2R2MEFC8X11.5](#) [450PK33MEFC16X25](#) [450PK3R3MEFC8X11.5](#)
[450PK47MEFC16X31.5](#) [400PK3R3MEFC8X11.5](#) [400PK47MEFC16X25](#) [400PK4R7MEFC10X12.5](#)
[450PK0R47MEFC6.3X11](#) [450PK100MEFC18X40](#) [450PK10MEFC10X20](#) [400PK100MEFC18X35.5](#)
[400PK10MEFC10X16](#) [400PK1MEFC6.3X11](#) [400PK22MEFC12.5X20](#) [400PK2R2MEFC8X11.5](#)
[400PK33MEFC12.5X25](#) [35PK4700MEFC16X35.5](#) [35PK470MEFC10X12.5](#) [35PK47MEFC5X11](#)
[35PK6800MEFC18X35.5](#) [35PK680MEFC10X16](#) [400PK0R47MEFC6.3X11](#) [35PK2200MEFC16X25](#)
[35PK220MEFC8X11.5](#) [35PK22MEFC5X11](#) [35PK3300MEFC16X25](#) [35PK330MEFC10X12.5](#) [35PK33MEFC5X11](#)
[350PK33MEFC12.5X25](#) [350PK3R3MEFC8X11.5](#) [350PK47MEFC16X25](#) [350PK4R7MEFC8X11.5](#)
[35PK1000MEFC10X20](#) [35PK100MEFC6.3X11](#) [25PK680MEFC10X12.5](#) [350PK0R47MEFC6.3X11](#)
[350PK100MEFC18X31.5](#) [350PK10MEFC10X16](#) [350PK1MEFC6.3X11](#) [350PK22MEFC12.5X20](#)
[25PK330MEFC8X11.5](#) [25PK33MEFC5X11](#) [25PK4700MEFC16X25](#) [25PK470MEFC8X11.5](#) [25PK47MEFC5X11](#)
[25PK6800MEFC16X31.5](#) [25PK10000MEFC18X35.5](#) [25PK1000MEFC10X16](#) [25PK100MEFC5X11](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9