

Small Signal Product

## SMD Zener Diode

### FEATURES

- Wide zener voltage range selection: 2.0V to 39V
- Designed for mounting on small surface
- Extremely thin / leadless package
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21


**0603**

### MECHANICAL DATA

- Case: 0603
- Terminal: Gold plated, solderable per MIL-STD-750, method 2026
- Polarity: Indicated by cathode band
- Weight: 3 mg (approximately)

| <b>MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS</b> ( $T_A=25^{\circ}\text{C}$ unless otherwise noted) |                |              |                    |
|----------------------------------------------------------------------------------------------------------|----------------|--------------|--------------------|
| <b>PARAMETER</b>                                                                                         | <b>SYMBOL</b>  | <b>VALUE</b> | <b>UNIT</b>        |
| Power Dissipation                                                                                        | $P_D$          | 150          | mW                 |
| Forward Voltage @ $I_F = 10\text{mA}$                                                                    | $V_F$          | 0.9          | V                  |
| Forward Current, Surge Peak 8.3 ms Single Half Sine-Wave Superimposed on Rate Load                       | $I_{FSM}$      | 2            | A                  |
| Junction and Storage Temperature Range                                                                   | $T_J, T_{STG}$ | -55 to +125  | $^{\circ}\text{C}$ |

## Small Signal Product

**ELECTRICAL CHARACTERISTICS** (  $T_A = 25^\circ\text{C}$  unless otherwise noted )

| Device     | Device Marking Code | Zener Voltage |       |            | Operating Resistance |            | Rising Operating Resistance |            | Reverse Current |           |
|------------|---------------------|---------------|-------|------------|----------------------|------------|-----------------------------|------------|-----------------|-----------|
|            |                     | $V_Z$ (Volt)  |       |            | $Z_{ZT}$ (Ohm)       |            | $Z_{ZK}$ (Ohm)              |            | $I_R$ (uA)      |           |
|            |                     | Min           | Max   | $I_Z$ (mA) | Max                  | $I_Z$ (mA) | Max                         | $I_Z$ (mA) | Max             | $V_R$ (V) |
| TSZU52C2V0 | Z0                  | 1.90          | 2.10  | 5          | 100                  | 5          | 600                         | 1          | 100             | 1.0       |
| TSZU52C2V2 | Z1                  | 2.09          | 2.31  | 5          | 100                  | 5          | 600                         | 1          | 100             | 1.0       |
| TSZU52C2V4 | Z2                  | 2.28          | 2.52  | 5          | 85                   | 5          | 600                         | 1          | 100             | 1.0       |
| TSZU52C2V7 | Z3                  | 2.57          | 2.84  | 5          | 83                   | 5          | 500                         | 1          | 75              | 1.0       |
| TSZU52C3V0 | Z4                  | 2.85          | 3.15  | 5          | 95                   | 5          | 500                         | 1          | 50              | 1.0       |
| TSZU52C3V3 | Z5                  | 3.14          | 3.47  | 5          | 95                   | 5          | 500                         | 1          | 25              | 1.0       |
| TSZU52C3V6 | Z6                  | 3.42          | 3.78  | 5          | 95                   | 5          | 500                         | 1          | 15              | 1.0       |
| TSZU52C3V9 | Z7                  | 3.71          | 4.10  | 5          | 95                   | 5          | 500                         | 1          | 10              | 1.0       |
| TSZU52C4V3 | Z8                  | 4.09          | 4.52  | 5          | 95                   | 5          | 500                         | 1          | 5.0             | 1.0       |
| TSZU52C4V7 | Z9                  | 4.47          | 4.94  | 5          | 78                   | 5          | 500                         | 1          | 5.0             | 2.0       |
| TSZU52C5V1 | ZA                  | 4.85          | 5.36  | 5          | 60                   | 5          | 480                         | 1          | 0.1             | 0.8       |
| TSZU52C5V6 | ZB                  | 5.32          | 5.88  | 5          | 40                   | 5          | 400                         | 1          | 0.1             | 1.0       |
| TSZU52C6V2 | ZC                  | 5.89          | 6.51  | 5          | 10                   | 5          | 200                         | 1          | 0.1             | 2.0       |
| TSZU52C6V8 | ZE                  | 6.46          | 7.14  | 5          | 8                    | 5          | 150                         | 1          | 0.1             | 3.0       |
| TSZU52C7V5 | ZF                  | 7.13          | 7.88  | 5          | 7                    | 5          | 50                          | 1          | 0.1             | 5.0       |
| TSZU52C8V2 | ZG                  | 7.79          | 8.61  | 5          | 7                    | 5          | 50                          | 1          | 0.1             | 6.0       |
| TSZU52C9V1 | ZH                  | 8.65          | 9.56  | 5          | 10                   | 5          | 50                          | 1          | 0.1             | 7.0       |
| TSZU52C10  | ZJ                  | 9.50          | 10.50 | 5          | 15                   | 5          | 70                          | 1          | 0.1             | 7.5       |
| TSZU52C11  | ZK                  | 10.45         | 11.55 | 5          | 20                   | 5          | 70                          | 1          | 0.1             | 8.5       |
| TSZU52C12  | ZM                  | 11.40         | 12.60 | 5          | 20                   | 5          | 90                          | 1          | 0.1             | 9.0       |
| TSZU52C13  | ZN                  | 12.35         | 13.65 | 5          | 25                   | 5          | 110                         | 1          | 0.1             | 10        |
| TSZU52C15  | ZP                  | 14.25         | 15.75 | 5          | 30                   | 5          | 110                         | 1          | 0.1             | 11        |
| TSZU52C16  | ZQ                  | 15.20         | 16.80 | 5          | 40                   | 5          | 170                         | 1          | 0.1             | 12        |
| TSZU52C18  | ZR                  | 17.10         | 18.90 | 5          | 50                   | 5          | 170                         | 1          | 0.1             | 14        |
| TSZU52C20  | ZS                  | 19.00         | 21.00 | 5          | 50                   | 5          | 220                         | 1          | 0.1             | 15        |
| TSZU52C22  | ZT                  | 20.90         | 23.10 | 5          | 55                   | 5          | 220                         | 1          | 0.1             | 17        |
| TSZU52C24  | ZU                  | 22.80         | 25.20 | 5          | 80                   | 5          | 220                         | 1          | 0.1             | 18        |
| TSZU52C27  | ZV                  | 25.65         | 28.35 | 5          | 80                   | 5          | 250                         | 1          | 0.1             | 20        |
| TSZU52C30  | ZW                  | 28.50         | 31.50 | 5          | 80                   | 5          | 250                         | 1          | 0.1             | 23        |
| TSZU52C33  | ZX                  | 31.35         | 34.65 | 5          | 80                   | 5          | 250                         | 1          | 0.1             | 25        |
| TSZU52C36  | ZY                  | 34.20         | 37.80 | 5          | 90                   | 5          | 250                         | 1          | 0.1             | 27        |
| TSZU52C39  | ZZ                  | 37.05         | 40.95 | 5          | 90                   | 5          | 300                         | 1          | 0.1             | 29        |

Small Signal Product

**RATINGS AND CHARACTERISTICS CURVES**

( $T_A=25^{\circ}\text{C}$  unless otherwise noted)

Fig. 1 Temperature Coefficients

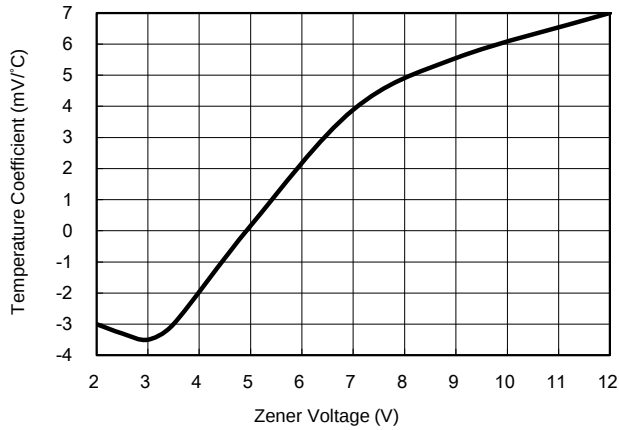


Fig. 2 Temperature Coefficients

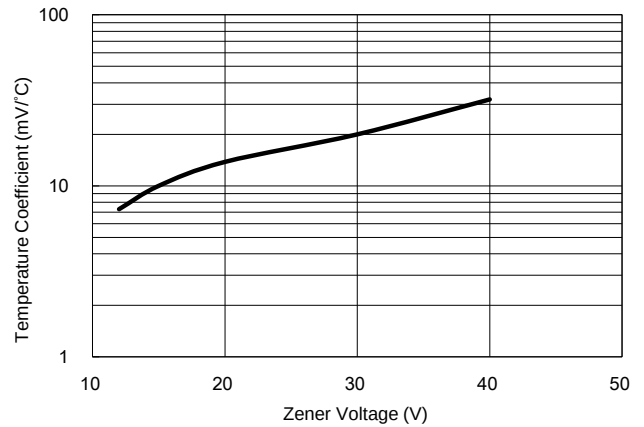


Fig. 3 Effect of Zener Voltage on Zener Impedance

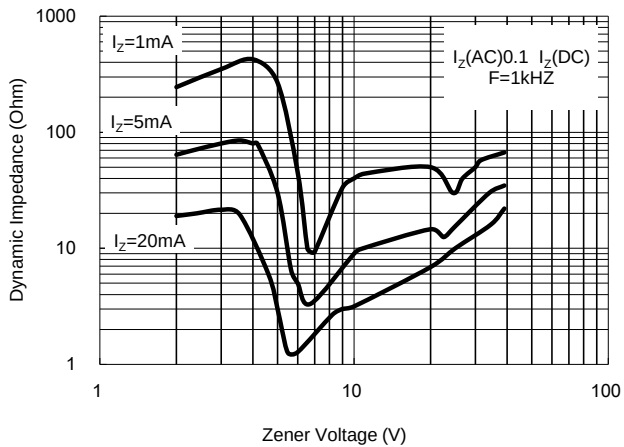


Fig. 4 Typical Forward Voltage

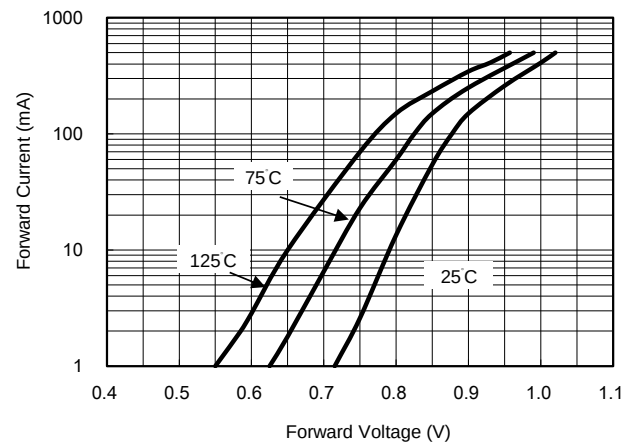


Fig. 5 Typical Leakage Current


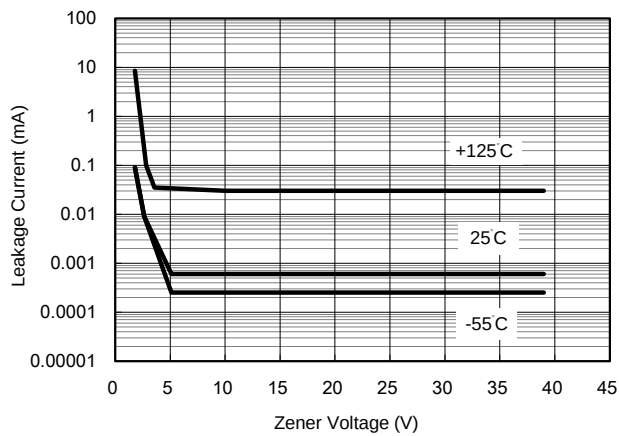


Fig. 6 Typical Capacitance

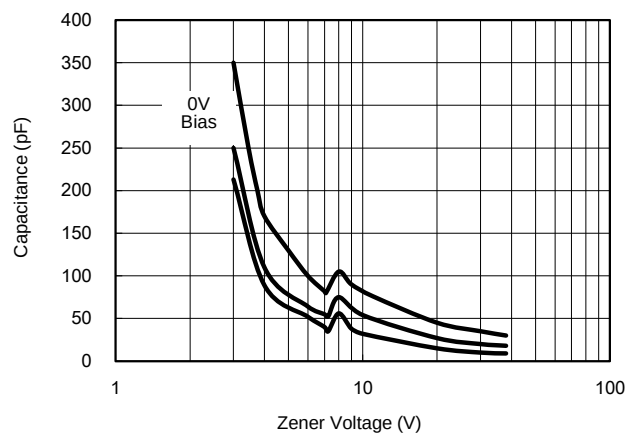

Small Signal Product

Fig. 7 Zener Voltage VS. Zener Current

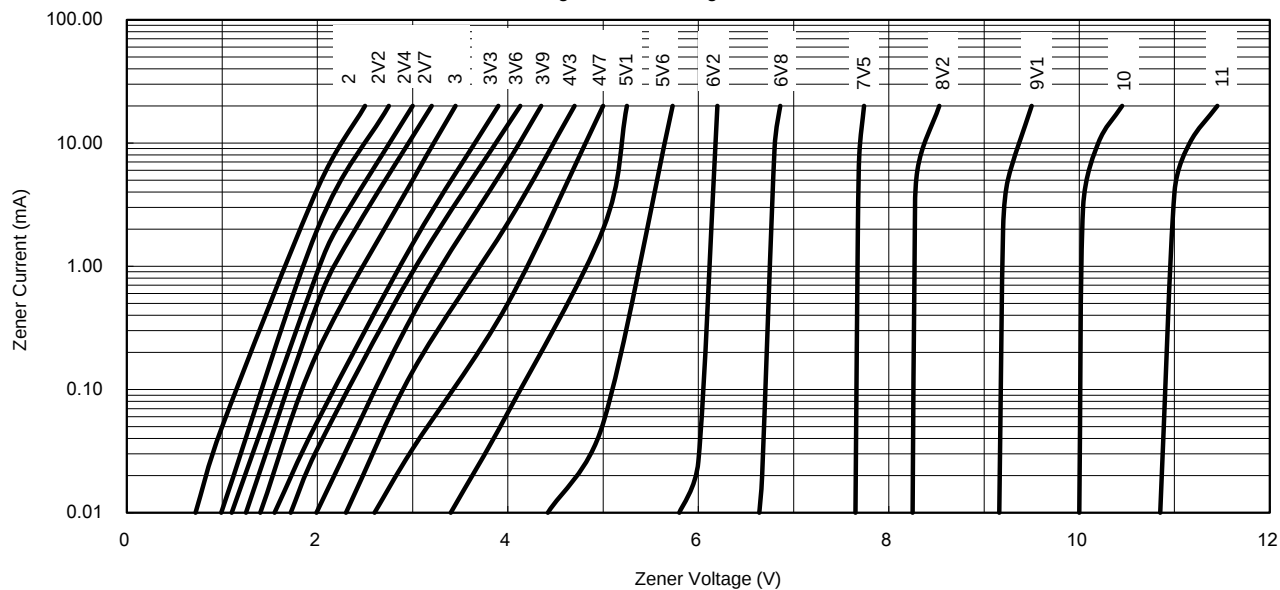


Fig. 8 Zener Voltage vs. Zener Current


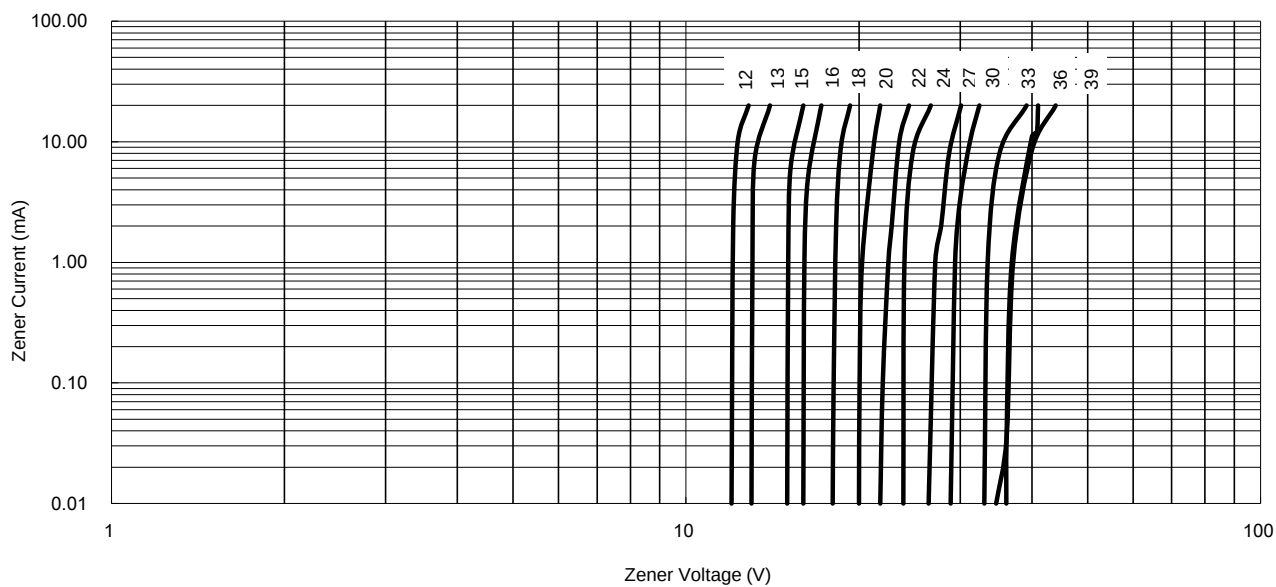


Fig. 9 Steady State Power Derating

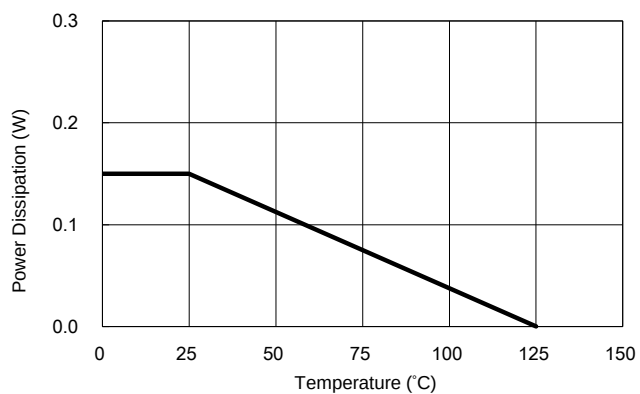

Small Signal Product

**ORDERING INFORMATION**

| PART NO.                 | PACKING CODE | PACKING CODE SUFFIX | PACKAGE | PACKING      |
|--------------------------|--------------|---------------------|---------|--------------|
| TSZU52Cxxx<br>(Note1, 2) | RG           | G                   | 0603    | 4K / 7" Reel |

Note 1: "xxx" defines voltage from 2.0V (TSZU52C2V0) to 39V (TSZU52C39)


Note 2: Whole series with green compound

**EXAMPLE**

| EXAMPLE P/N   | PART NO.  | PACKING CODE | PACKING CODE SUFFIX | DESCRIPTION    |
|---------------|-----------|--------------|---------------------|----------------|
| TSZU52C39 RGG | TSZU52C39 | RG           | G                   | Green compound |

**PACKAGE OUTLINE DIMENSION**

0603

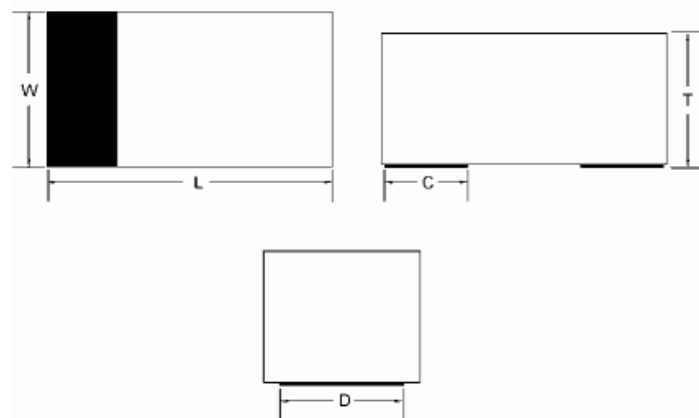

| DIM. | Unit (mm) |      |      | Unit (inch) |       |       |
|------|-----------|------|------|-------------|-------|-------|
|      | Min       | Typ. | Max  | Min         | Typ.  | Max   |
| L    | 1.60      | -    | 1.80 | 0.063       | -     | 0.071 |
| W    | 0.80      | -    | 1.00 | 0.031       | -     | 0.039 |
| T    | 0.70      | -    | 0.85 | 0.028       | -     | 0.033 |
| C    | -         | 0.45 | -    | -           | 0.018 | -     |
| D    | -         | 0.70 | -    | -           | 0.028 | -     |

### **Notice**

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9