


## MAGNETIC-LATCHING DC-8 GHz TO-5 RELAYS 4PST



| SERIES  | RELAY TYPE                                                        |
|---------|-------------------------------------------------------------------|
| GRF424  | 4PST RF Relay                                                     |
| GRF424D | 4PST RF Relay with internal diodes for coil transient suppression |

### DESCRIPTION

The GRF424 series relay is an ultraminiature, hermetically sealed, magnetic-latching relay featuring low intercontact capacitance for exceptional RF performance from DC-8 GHz. It's low profile and small size make it ideal for applications where extreme packaging density and/or close PC board spacing are required. Due to its minimal mass, many relays may be used to configure replacements for bulkier switching solutions at a substantial savings in weight. These design features make these unique relays the perfect choice for use in RF attenuators, RF switching matrices and other RF applications requiring low insertion loss and low VSWR. The basic operating mechanism is similar to the TO-5 422 series relay.

The following unique construction features and manufacturing techniques provide overall high reliability and excellent resistance to environmental extremes:


- Minimum mass components and welded construction provide maximum resistance to shock and vibration.
- Advanced cleaning techniques provide maximum assurance of internal cleanliness.
- Gold-plated precious metal contacts ensure reliable, lowlevel switching.

The RF424 relay is ideally suited for applications where power dissipation must be minimized. The relays can be operated with a short duration pulse. After the contacts have transferred, no external holding power is required. The magnetic latching feature of the RF424 series provides a nonvolatile "memory" capability since the relays will not reset upon removal of coil power.

The 424D series utilizes discrete diodes for coil suppression.

### PRINCIPAL OF OPERATION

Energizing Coil B produces a magnetic field opposing the holding flux of the permanent magnet in Circuit B. As this net holding force decreases, the attractive force in the air gap of Circuit A, which also results from the flux of the permanent magnet, becomes great enough to break the armature free of Core B, and snap it into a closed position against Core A. The armature then remains in this position upon removal of power from Coil B, but will snap back into position B upon energizing Coil A. Since operation depends upon cancellation of a magnetic field, it is necessary to apply the correct polarity to the relay coils as indicated on the relay schematic. When latching relays are installed in equipment, the latch and reset coils should not be pulsed simultaneously. Coils should not be pulsed with less than rated coil voltage and the pulse width should be a minimum of three times the specified operate time of the relay. If these conditions are not followed, it is possible for the relay to be in the magnetic neutral position.







### ENVIRONMENTAL AND PHYSICAL SPECIFICATIONS

|                                      |                              |
|--------------------------------------|------------------------------|
| <b>Temperature</b>                   |                              |
| Storage                              | -65°C to +125°C              |
| Operating                            | -55°C to +85°C               |
| <b>Vibration</b><br>(General Note 1) | 10 g's to 500 Hz             |
| <b>Shock</b><br>(General Note 1)     | 30 g's, for 6 msec half sine |
| <b>Enclosure</b>                     | Hermetically Sealed          |
| <b>Weight</b>                        | 0.1 oz. (2.9g) max.          |

**SERIES GRF424/GRF424D**

**TYPICAL RF CHARACTERISTICS (See RF Notes)**

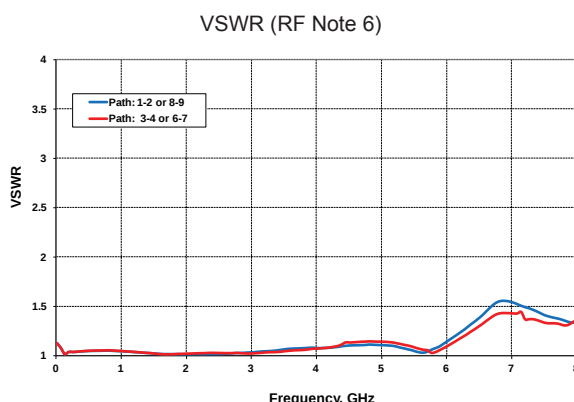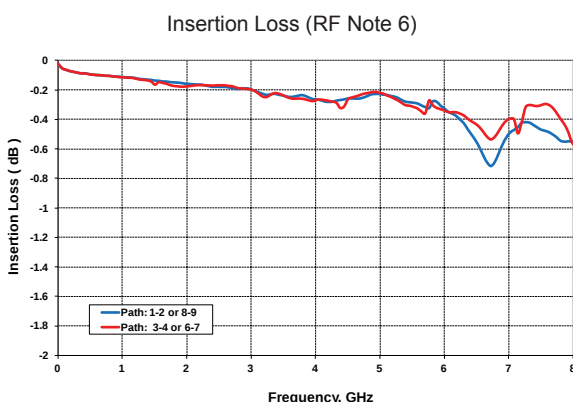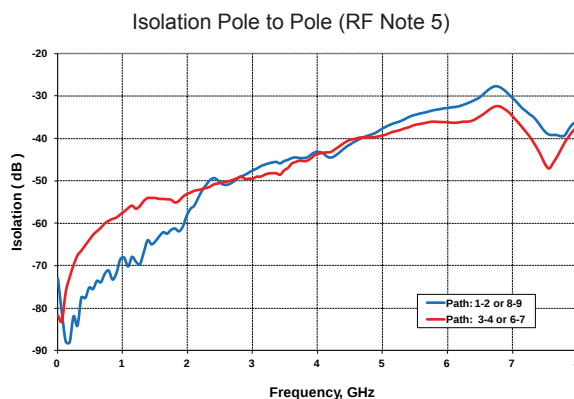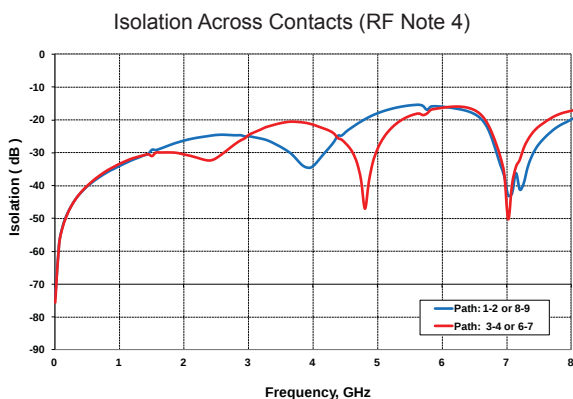

**RF NOTES**


1. Test conditions:
  - a. Fixture: .031" copper clad, reinforced PTFE, RT/duroid® 6002 with SMA connectors. (RT/duroid® is a registered trademark of Rogers Corporation.)
  - b. Relay header is soldered to ground plane.
  - c. Room ambient temperature.
  - d. All terminals not tested were terminated with 50-ohm load.
  - e. Contact signal level: -10 dBm.
  - f. No. of test samples: 2.
2. Data presented herein represents typical characteristics and is not intended for use as specification limits.
3. Data is per pole, except for pole-to-pole data.
4. Data is the average from readings taken on poles after Coil A is energized then Coil B is energized.
5. Data is the average from readings taken on all closed contacts.
6. Test fixture effect de-embedded from frequency and time response data.

**SERIES GRF424A/GRF424D**
**GENERAL ELECTRICAL SPECIFICATIONS (@25°C unless otherwise noted) (Note 2)**

|                                      |                                                                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Contact Arrangement</b>           | Bi-Stable (4PST)                                                                                                                                        |
| <b>Rated Duty</b>                    | Continuous                                                                                                                                              |
| <b>Contact Resistance</b>            | 0.15 $\Omega$ max. initial (measured 1/8" from the header)                                                                                              |
| <b>Contact Load Rating</b>           | Resistive: 1Amp/28Vdc<br>Low level: 10 to 50 $\mu$ A @ 10 to 50 mV                                                                                      |
| <b>Contact Life Ratings</b>          | 10,000,000 cycles (typical) at low level<br>100,000 cycles min. at all other loads specified above                                                      |
| <b>Coil Operating Power</b>          | RF424-5: 410 mW typical @ nominal rated voltage<br>RF424-12: 288 mW typical @ nominal rated voltage<br>RF424-26: 351 mW typical @ nominal rated voltage |
| <b>Operate Time</b>                  | 1.5 mS max. @ nominal rated voltage                                                                                                                     |
| <b>Contact Bounce</b>                | 3.0 mS max.                                                                                                                                             |
| <b>Intercontact Capacitance</b>      | 0.4 pf typical                                                                                                                                          |
| <b>Insulation Resistance</b>         | 10,000 M $\Omega$ min. between mutually isolated terminals                                                                                              |
| <b>Dielectric Strength</b>           | 350 Vrms (60 Hz) @ atmospheric pressure<br>125 Vrms (60 Hz) @ 70,000 ft                                                                                 |
| <b>Negative Coil Transient (Vdc)</b> | RF424D: 1.0 max.                                                                                                                                        |
| <b>Diode P.I.V. (Vdc)</b>            | RF424D: 100 min.                                                                                                                                        |

**DETAILED ELECTRICAL SPECIFICATIONS (@25°C)**

| BASE PART NUMBERS                                                 |      | GRF424-5<br>GRF424D-5 | GRF424-12<br>GRF424D-12 | GRF424-26<br>GRF424D-26 |
|-------------------------------------------------------------------|------|-----------------------|-------------------------|-------------------------|
| <b>Coil Voltage, Nominal (Vdc)</b>                                | Nom. | 5.0                   | 12.0                    | 26.5                    |
|                                                                   | Max. | 6.5                   | 16.0                    | 32.0                    |
| <b>Coil Resistance (Ohms <math>\pm</math>20% @ 25°C) (Note 4)</b> |      | 61                    | 500                     | 2000                    |
| <b>Set &amp; Reset Voltage (Vdc, Max.) Pulse Operated</b>         |      | 4.0                   | 9.6                     | 19.0                    |

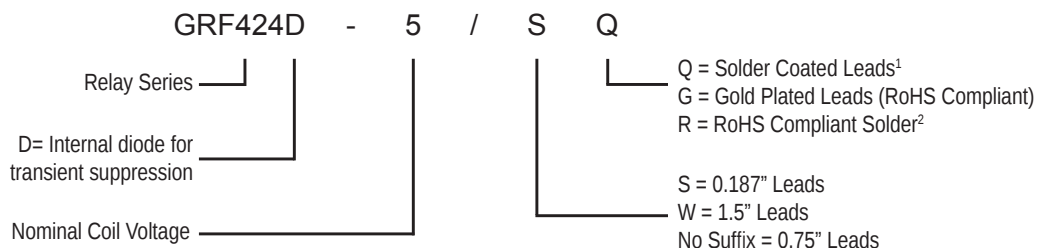
**Teledyne Part Numbering System for GRF424**


**General Note:** Parts ordered without suffix may be supplied with Solder-Coated or Gold-Plated leads

<sup>1</sup> Parts ordered with Solder-Coated leads will have (Sn60/Pb40)

<sup>2</sup> Parts ordered with RoHS Solder-Coated leads will have (Sn99.3/Cu0.7)

**SERIES GRF424/RF424D**  
**OUTLINE DIMENSIONS**

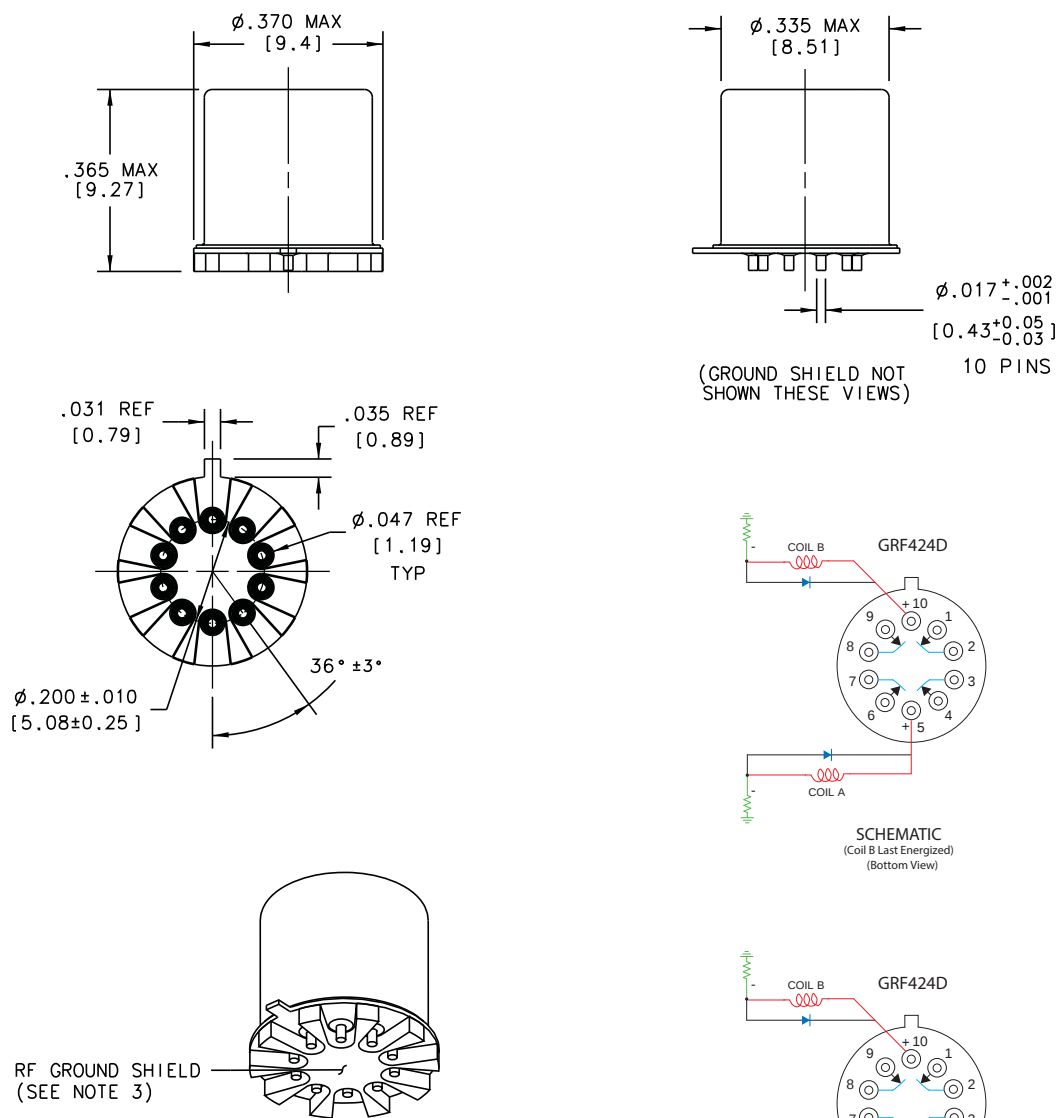


**NOTES:**

1. DIMENSIONS ARE IN INCHES, METRIC EQUIVALENTS SHOWN IN [ ].

**GENERAL NOTES**

1. Relays will exhibit no contact chatter in excess of 10  $\mu\text{sec}$  or transfer in excess of 1  $\mu\text{sec}$ .
2. Unless otherwise specified, parameters are initial values.
3. For extended contact life ratings, contact factory.
4. Contacts shown in position resulting when Coil B last energized.

**SERIES GRF424/GRF424D**  
**TYPICAL SIGNAL INTEGRITY CHARACTERISTICS**

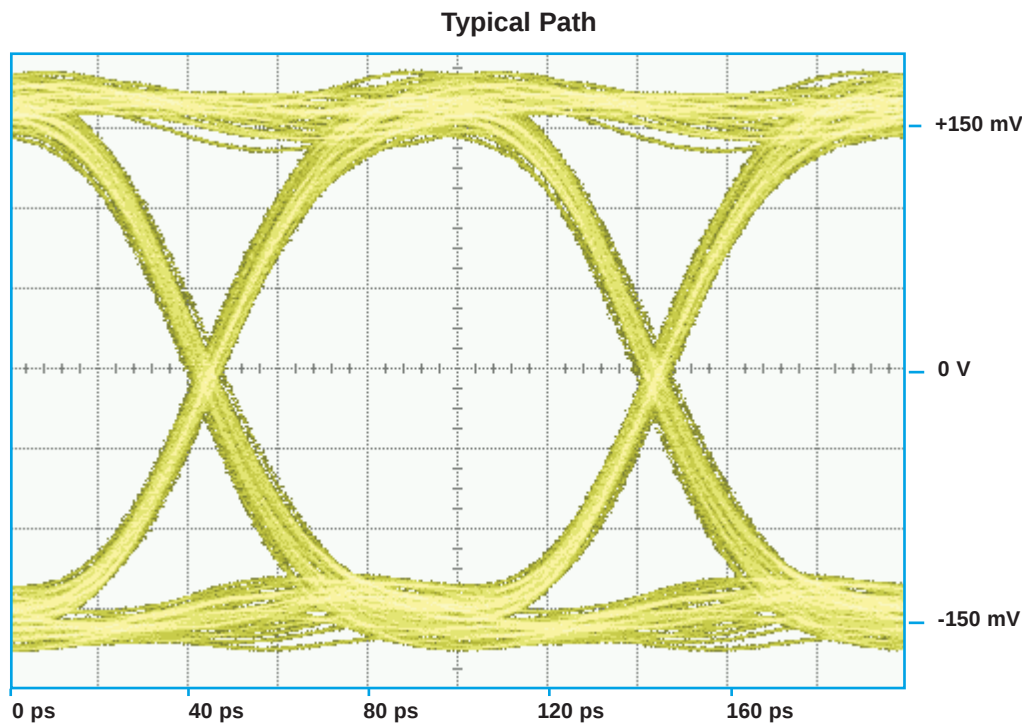

| Eye Height | Eye Width | SNR   | Jitter <sub>P-P</sub> |
|------------|-----------|-------|-----------------------|
| 254.0 mV   | 90.27 ps  | 15.61 | 8.89 ps               |

**PATTERN GENERATOR SETTINGS**

- 10 Gbps Random Pulse Pattern Generator
- $2^{31} - 1$  PRBS signal
- PRBS output of 300 mV<sub>P-P</sub> (nominal)
- RF PCB effect (negligible) not removed from measurement
- Data shown is typical of both poles

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9