

Extension module - PSR-SCP- 24UC/URM/5X1/2X2 - 2963747

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)




Universal safety relay with forcibly guided contacts, 5 N/O contacts, 2 N/C contacts, single-channel, plug-in terminal blocks with screw connection, width: 22.5 mm

Product Features

- ✔ Like all PSR safety relays, equipped with forcibly guided contacts according to EN 50205
- ✔ Single-channel control



Key commercial data

| | |
|----------------------|---|
| Packing unit | 1 PCE |
| GTIN |  4 017918 482145 |
| Custom tariff number | 85364900 |
| Country of origin | GERMANY |

Technical data

Dimensions

| | |
|--------|----------|
| Width | 22.5 mm |
| Height | 99 mm |
| Depth | 114.5 mm |

Input data

| | |
|---|-------------|
| Nominal input voltage U_N | 24 V AC/DC |
| Input voltage range in reference to U_N | 0.8 ... 1.1 |
| Typical input current at U_N | 47 mA |
| Typical response time | 20 ms |
| Typical release time | 20 ms |

Extension module - PSR-SCP- 24UC/URM/5X1/2X2 - 2963747

Technical data

Output data

| | |
|--|--|
| Contact type | 5 N/O contacts |
| Contact type | 2 N/C contacts |
| Contact material | AgSnO ₂ , + 0.2 µm Au |
| Maximum switching voltage | 250 V AC/DC |
| Minimum switching voltage | 15 V AC/DC |
| Limiting continuous current | 6 A |
| Maximum inrush current | 6 A |
| Inrush current, minimum | 25 mA |
| Sq. Total current | 72 A ² ($I_{TH}^2 = I_1^2 + I_2^2 + \dots + I_5^2$) |
| Interrupting rating (ohmic load) max. | 144 W (24 V DC, τ = 0 ms) |
| Interrupting rating (ohmic load) max. | 288 W (48 V DC, τ = 0 ms) |
| Interrupting rating (ohmic load) max. | 110 W (110 V DC, τ = 0 ms) |
| Interrupting rating (ohmic load) max. | 88 W (220 V DC, τ = 0 ms) |
| Interrupting rating (ohmic load) max. | 1500 VA (250 V AC, τ = 0 ms) |
| Maximum interrupting rating (inductive load) | 42 W (24 V DC, τ = 40 ms) |
| Maximum interrupting rating (inductive load) | 42 W (48 V DC, τ = 40 ms) |
| Maximum interrupting rating (inductive load) | 42 W (110 V DC, τ = 40 ms) |
| Maximum interrupting rating (inductive load) | 42 W (220 V DC, τ = 40 ms) |
| Switching capacity min. | 0.4 W |
| Output fuse | 6 A fast blow |
| Output fuse | C6 (24 V AC/DC) automatic device |

General data

| | |
|---|--|
| Ambient temperature (operation) | -20 °C ... 55 °C |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C |
| Relay type | Electromechanically forcibly guided, dust-proof relay. |
| Mechanical service life | Approx. 10 ⁷ cycles |
| Mounting position | Any |
| Stop category | 0 |
| Name | Air and creepage distances between the power circuits |
| Standards/regulations | DIN EN 50178/VDE 0160 |
| Standards/regulations | EN 50205 |
| Rated surge voltage / insulation | 4 kV / basic insulation |
| Rated insulation voltage | 250 V |
| Pollution degree | 2 |
| Surge voltage category | III |

Connection data

Extension module - PSR-SCP- 24UC/URM/5X1/2X2 - 2963747

Technical data

Connection data

| | |
|--|---------------------|
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 2.5 mm ² |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 12 |
| Stripping length | 7 mm |
| Screw thread | M3 |
| Connection method | Screw connection |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27371102 |
| eCl@ss 4.1 | 27371102 |
| eCl@ss 5.0 | 27371901 |
| eCl@ss 5.1 | 27371901 |
| eCl@ss 6.0 | 27371819 |
| eCl@ss 7.0 | 27371819 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000196 |
| ETIM 3.0 | EC001449 |
| ETIM 4.0 | EC001449 |
| ETIM 5.0 | EC001449 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211901 |
| UNSPSC 7.0901 | 39121501 |
| UNSPSC 11 | 39121501 |
| UNSPSC 12.01 | 39121501 |
| UNSPSC 13.2 | 39121501 |

Approvals

Approvals

Extension module - PSR-SCP- 24UC/URM/5X1/2X2 - 2963747

Approvals

Approvals


UL Listed / GOST / cUL Listed / cULus Listed

Ex Approvals


Approvals submitted

Approval details

UL Listed 

GOST 


cUL Listed 

cULus Listed 


Drawings

Extension module - PSR-SCP- 24UC/URM/5X1/2X2 - 2963747

Application drawing

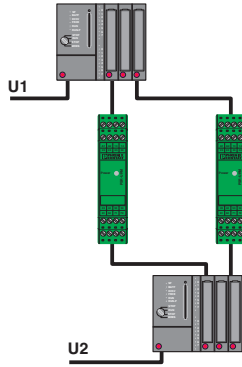

Circuit diagram

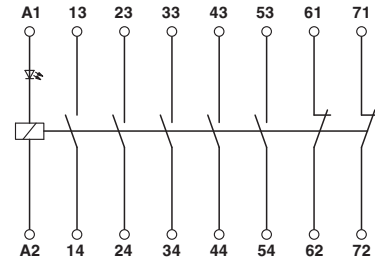

Reliable signal exchange between two systems with confirmation function.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9