

# FL SERIES

## Floating Hot Deck LVPS With Isolated Digital and Analog I/O



The FL Series of floating-hot-deck, low-voltage power supplies offers an integrated solution for systems requiring LV power & controls with high-voltage isolation. Combining a highly isolated, DC-to-DC, multi-output low-voltage power supply (LVPS) with an advanced isolated digital & analog I/O topology, the FL sub-system provides both power and controls to floating-hot-deck circuitry. This solution, when combined with one or more UV HVPS or other circuitry, can provide high-performance solutions for applications such as:

- Isolated up to 15kV
- DC leakage current of <10nA
- AC leakage capacitance of <40pF
- 3 regulated floating LV power outputs
- Isolated digital I/O to and from floating hot deck
- Isolated analog I/O to and from floating hot deck
- UL/cUL Recognized Component; CE Mark (LVD & RoHS)

- |                                       |                             |
|---------------------------------------|-----------------------------|
| Floating/Stacked Ion or E-Beam Biases | Floating Filament Bias      |
| Floating Pulsers & Gated Grids        | Floating Capacitance Meters |
| Floating High Side Current Monitors   | Floating Leakage Testers    |

Please contact UltraVolt's customer service department for an analysis of your requirements.



Specifications subject to change without notice.



Making High Voltage Easier!®

Higher Service, Higher Performance, Higher Reliability  
©2011, UltraVolt Inc. All rights reserved.

# FL SERIES

## Floating Hot Deck LVPS With Isolated Digital and Analog I/O

| PARAMETER                                     | CONDITIONS                           | MODELS   |                      | UNITS  |
|---|--------------------------------------|--|----------------------|--------|
| <b>INPUT POWER:</b>                           |                                      | <b>12V MODELS</b>  | <b>24V MODELS</b>    |        |
| Voltage Range                                 | Full Power                           | +12 ± 5%   | +24 ± 5%             | VDC    |
| Voltage Range                                 | Derated Power Range                  | +10.8 to +16   | +21.6 to +30         | VDC    |
| Current                                       | Standby ( Disabled )                 | < 90   | < 50                 | mA     |
| Current                                       | No Load                              | < 0.15   | < 0.15               | A      |
| Current                                       | Max Load                             | < 1.60   | < 1.40               | A      |
| AC Ripple Current                             | Nominal Input, Full Load             | < 80   | < 100                | mA p-p |
| <b>LOCAL CONTROLS: REFERENCE</b>              |                                      | <b>ALL TYPES</b>   |                      |        |
| Output Voltage                                | T = +25°C, Initial value             | +5.1 ± 1%  |                      | VDC    |
| Output Impedance                              | T = +25°C                            | 464 ± 1%   |                      | Ω      |
| Stability                                     | Over full temperature range          | 0.2  |                      | mV/°C  |
| <b>LOCAL CONTROLS: LVPS ENABLE / DISABLE</b>  |                                      | <b>ALL TYPES</b>   |                      |        |
| Power supply on                               | Open, or a voltage above TTL high    | +2.4 to 32   |                      | VDC    |
| Power supply off                              | Grounded, or a voltage below TTL low | 0 to + 0.7 ± 0.2 (Isink 1mA minimum)                                 |                      | VDC    |
| <b>INPUT / OUTPUT ISOLATION:</b>              |                                      | <b>12V MODELS</b>  | <b>24V MODELS</b>    |        |
| Isolation Voltage                             | Continuous                           | 15   | 15                   | kV     |
| Leakage Current                               | All inputs to all outputs            | < 10 std, < 100 "-E"   | < 10 std, < 100 "-E" | nA     |
| Leakage Capacitance                           | All inputs to all outputs            | < 40 std, < 50 "-E"  | < 50 std or "-E"     | pF     |
| <b>ISOLATED POWER OUTPUTS:</b>                |                                      | <b>15FL12-12W</b>  | <b>15FL24-24W</b>    |        |
| Output #1 Power                               | Nominal input, max lout              | 12   | 24                   | W      |
| Output #1 Voltage                             | Nominal input voltage range          | +12 ± 2%   | +24 ± 2%             | VDC    |
| Output #1 Current                             | Minimum to Maximum                   | 0 to 1   | 0 to 1               | A      |
| Output #1 Line Regulation                     | Nominal input range, full load       | < 0.1%   | < 0.1%               | VDC    |
| Output #1 Load Regulation                     | No load to full load                 | < 0.1%   | < 0.1%               | VDC    |
| Output #1 Ripple                              | Full load                            | < 2%   | < 1%                 | V p-p  |
| Output #2 Voltage                             | Nominal input voltage range          | -15 ± 1  | -15 ± 1              | VDC    |
| Output #2 Current                             | Minimum > Maximum                    | 0 to 10  | 0 to 10              | mA     |
| Output #2 Line Regulation                     | Nominal input range, full load       | < 0.1%   | < 0.1%               | VDC    |
| Output #2 Load Regulation                     | No load to full load                 | < 2%   | < 2%                 | VDC    |
| Output #2 Ripple                              | Full load                            | < 2%   | < 2%                 | V p-p  |
| Output #3 Voltage                             | Nominal input voltage range          | +5.6 ± 6%  | +5.6 ± 6%            | VDC    |
| Output #3 Current                             | Minimum > Maximum                    | 0 to 10  | 0 to 10              | mA     |
| Output #3 Line Regulation                     | Nominal input range, full load       | < 1 %  | < 1 %                | VDC    |
| Output #3 Load Regulation                     | No load to full load                 | < 1 %  | < 1 %                | VDC    |
| Output #3 Ripple                              | Full load                            | < 1 %  | < 1 %                | V p-p  |
| <b>ISOLATED CONTROLS: TTL CHANNEL "UP"</b>    |                                      | <b>ALL TYPES WITH "-I/O" OPTION</b>                                  |                      |        |
| Local input                                   | Source voltage, sink current         | 10MΩ internal pull up to +15V<br><1V low, >2.5V high                 |                      | VDC    |
| Isolated output                               | Inverted & buffered TTL              | Open collector with internal 1kΩ pull up to +5V<br>Can sink 10mA max |                      | VDC    |
| Baud Rate                                     | Varying duty cycle                   | DC to >300   |                      | kHz    |
| <b>ISOLATED CONTROLS: ANALOG CHANNEL "UP"</b> |                                      | <b>ALL TYPES WITH "-I/O" OPTION</b>                                  |                      |        |
| Local input voltage                           | Range                                | 0 to + 5   |                      | VDC    |
| Local input impedance                         |                                      | 10 Meg   |                      | Ω      |
| Isolated output voltage                       | Range                                | 0 to + 5   |                      | VDC    |
| Isolated output impedance                     |                                      | Buffered low impedance   |                      | -      |
| Initial offset error                          |                                      | < ± 1%   |                      | mV     |
| Gain error                                    | Full scale                           | < ± 2%   |                      | VDC    |
| Linearity error                               | 0 to full scale                      | < ± 1%   |                      | VDC    |
| Stability                                     | 30 min. warm-up, per 8 hrs / per day | < 0.01% / < 0.02%  |                      | VDC    |
| Temperature Coefficient                       | 0 to +55°C                           | < ± 50   |                      | ppm/°C |
| Bandwidth                                     | Symmetric or asymmetric signal       | DC to 30 (-3dB point is 47 Hz)                                       |                      | Hz     |



Making High Voltage Easier!®

1800 Ocean Avenue, Ronkonkoma, NY 11779  
Phone: 1-631-471-4444 Fax: 1-631-471-4696 www.ultravolt.com

# FL SERIES

## Floating Hot Deck LVPS With Isolated Digital and Analog I/O

| ‘-RB’ ISOLATED CONTROLS: TTL CHANNEL “DOWN”       |  |  |                   |     |
|---|--|--|-------------------|-----|
| PARAMETER   | CONDITIONS                               | ALL TYPES WITH “-I/O-R/B” OPTION   | UNITS             |     |
| Isolated ‘Hot Deck’ Input                         | Source voltage, sink current             | 10M $\Omega$ internal pull up to +15V<br><1V low, >2.5V high                 | VDC               |     |
| Local output                                      | Inverted & Buffered TTL                  | Open collector with internal 1k $\Omega$ pull up to +5V<br>Can sink 10mA max | VDC               |     |
| Bandwidth   | Varying duty cycle                       | DC to >300   | kHz               |     |
| ISOLATED CONTROLS: ANALOG CHANNELS #1 & #2 “DOWN” |  |  |                   |     |
| PARAMETER   | CONDITIONS                               | ALL TYPES WITH “-I/O-R/B” OPTION   | UNITS             |     |
| Isolated ‘Hot Deck’ +Input                        | Range                                    | 0 to +5, 0 to +10 with >+15VDC input power                                   | VDC               |     |
| Isolated ‘Hot Deck’ -Input                        | Range                                    | 0 to -5, 0 to -10 with >+15VDC input power                                   | VDC               |     |
| Isolated ‘Hot Deck’ + or -<br>Input impedance     | Signal source                            | > 10 Meg   | $\Omega$          |     |
| Local output +voltage                             | Range                                    | 0 to +5, 0 to +10 with >+15VDC input power                                   | VDC               |     |
| Local output -voltage                             | Range                                    | 0 to -5, 0 to -10 with >+15VDC input power                                   | VDC               |     |
| Local output impedance                            | Signal source                            | Buffered low impedance   | $\Omega$          |     |
| Initial offset error                              | Signal source                            | < $\pm 5$  | mVDC              |     |
| Gain error  | Full scale                               | < $\pm 1\%$  | VDC               |     |
| Linearity error                                   | 0 to full scale                          | < $\pm 1\%$  | VDC               |     |
| Stability   | 30 min. warm-up, per 8 hrs / per day     | < 0.01% / < 0.02%  | VDC               |     |
| Temperature Coefficient                           | -20 $^{\circ}$ C to +55 $^{\circ}$ C     | < $\pm 50$   | ppm/ $^{\circ}$ C |     |
| Bandwidth   | Symmetric or asymmetric signal           | DC to 30 (-3dB point is 47Hz)  | Hz                |     |
| TEMPERATURE:                                      | CONDITIONS                               | ALL TYPES  |                   |     |
| Operating   | Full load, case measurement              | -20 to +55   | $^{\circ}$ C      |     |
| Storage   | Non-operating, case measurement          | -55 to +85   | $^{\circ}$ C      |     |
| Thermal shock                                     | Mil-Std-810, Method 503-4, Proc. II      | -20 to +55   | $^{\circ}$ C      |     |
| ALTITUDE:   |  | ALL TYPES  |                   |     |
| Operating   | All operating conditions                 | Sea level to Vacuum  |                   |     |
| Storage   | Non-operating                            | Sea level to Vacuum  |                   |     |
| SHOCK & VIBRATION:                                |  | STANDARD   | - R/B OPTION      |     |
| Shock   | Mil-Std-810, Method 516.5, Proc IV       | 20   | 20                | G's |
| Vibration   | Mil-Std-810, Method 514.5, Fig. 514.5C-3 | 10   | 10                | G's |



Making High Voltage Easier!®

1800 Ocean Avenue, Ronkonkoma, NY 11779  
Phone: 1-631-471-4444 Fax: 1-631-471-4696 www.ultravolt.com

# FL SERIES

## Floating Hot Deck LVPS With Isolated Digital and Analog I/O



### CONSTRUCTION

Epoxy-filled DAP box certified to ASTM-D-5948

### SIZE

Volume: Standard: 10 in<sup>3</sup> (163.9cc)  
 -R/B Option: 11.1 in<sup>3</sup> (182cc)  
 Weight: Standard: 12.0 oz (340.2g)  
 -R/B Option: 13.3 oz (377.1g)

### TOLERANCE

Overall  $\pm 0.050''$  (1.27)  
 Pin to Pin  $\pm 0.015''$  (0.38)  
 Mounting hole locations  $\pm 0.025''$  (0.64)

### NOTES

24-watt versions are an additional 0.062'' (1.57) in height.  
 -M equipped units are an additional 0.030'' (0.76) in height.  
 Contact UV Customer Service for drawings of models equipped with -E options.



Non-RoHS compliant units are available. Please contact the factory for more information.

| LOCAL CONNECTIONS |  |
|-------------------|--|
| PIN               | FUNCTION   |
| 1                 | Input Power Ground Return                            |
| 2                 | Positive Power Input                                 |
| 3                 | LVPS Enable/Disable Input                            |
| 4                 | TTL Up/HVPS Enable/Disable (-I/O Only)               |
| 5                 | Signal Ground Return                                 |
| 6                 | Analog Up/ HVPS Remote Programming Input (-I/O Only) |
| 7                 | +5V Reference Output                                 |


| ADDITIONAL LOCAL CONNECTIONS (-R/B OPTION) |  |
|--|--|
| PIN  | FUNCTION                                     |
| 8  | +Iout monitor output (Analog Down Channel 1) |
| 9  | -Iout monitor output (Analog Down Channel 1) |
| 10   | +Eout monitor output (Analog Down Channel 2) |
| 11   | -Eout monitor output (Analog Down Channel 2) |
| 12 & 13                                    | N/C (reserved for future use)                |
| 14   | TTL output (Digital Down Channel 1)          |

| ISOLATED/FLOATING CONNECTIONS |  |
|-------------------------------|--|
| PIN                           | FUNCTION   |
| 8                             | Floating PWR Ground Return                                   |
| 9                             | Floating +12VDC or +24VDC Output                             |
| 10                            | Floating -15VDC Output                                       |
| 11                            | Floating TTL Up/HVPS Enable/Disable (-I/O Only)              |
| 12                            | Floating Signal Ground Return                                |
| 13                            | Floating Analog Up/HVPS Remote Programming Input (-I/O Only) |
| 14                            | Floating +5.6V Reference Output                              |

| ADDITIONAL ISOLATED CONNECTIONS (-R/B ONLY) |  |
|---|--|
| PIN   | FUNCTION   |
| 1   | Floating +Iout monitor input (Analog Down Channel 1) |
| 2   | Floating -Iout monitor input (Analog Down Channel 1) |
| 3   | Floating +Eout monitor input (Analog Down Channel 2) |
| 4   | Floating -Eout monitor input (Analog Down Channel 2) |
| 5 & 6                                       | N/C (reserved for future use)                        |
| 7   | Floating TTL input (Digital Down Channel 1)          |

| ORDERING INFORMATION |   |          |
|----------------------|---|----------|
| Type                 | 15kV Isolation                                      | 15FL     |
| Input Voltage        | 12VDC Nominal                                       | 12       |
|                      | 24VDC Nominal                                       | 24       |
| Power                | Watts Output (12 V Only)                            | -12W     |
|                      | Watts Output (24 V Only)                            | -24W     |
| Options              | (1) Digital Up Channel & (1) Analog Up Channel      | -I/O     |
|                      | (1) Digital Down Channel & (2) Analog Down Channels | -RB      |
|                      | Partial Mu-Metal Shield                             | -M       |
| Case                 | Plastic Case - Diallyl Phthalate                    | Standard |
|                      | 'Eared' Chassis Mounting Plate                      | -E       |

Manufactured in USA

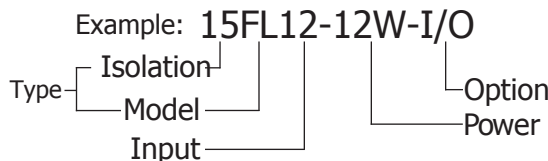

Rev. Q 10/14



Making High Voltage Easier!®

1800 Ocean Avenue, Ronkonkoma, NY 11779  
 Phone: 1-631-471-4444 Fax: 1-631-471-4696 www.ultravolt.com

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9