



# Quad SPST CMOS Analog Switches

## General Description

The DG201A and DG211 are normally closed, quad single-pole single-throw (SPST) analog switches. These CMOS switches can be continuously operated with power supplies ranging from  $\pm 4.5\text{V}$  to  $\pm 18\text{V}$ . Maxim guarantees that these switches will not latch up if the power supplies are disconnected with input signals still connected.

Both devices have guaranteed break-before-make switching. The DG201A differs from the DG211 primarily in switching speeds. The DG201A has a maximum turn-off time of 450ns and a maximum turn-on time of 600ns. The DG211 has a maximum turn-off time of 500ns and a maximum turn-on time of 1000ns.


Compared to the original manufacturer's products, Maxim's DG201A and DG211 consume significantly lower power making them better suited for portable applications. Maxim has also eliminated the need for the third ( $V_L$ ) power supply that is required for the operation of the original manufacturer's DG211.

## Applications

Winchester Disk Drives  
Test Equipment  
Communications Systems  
PBX, PABX  
Guidance and Control Systems  
Head Up Displays  
Military Radios

Pin Configurations continued at end of data sheet.

## Typical Operating Circuit

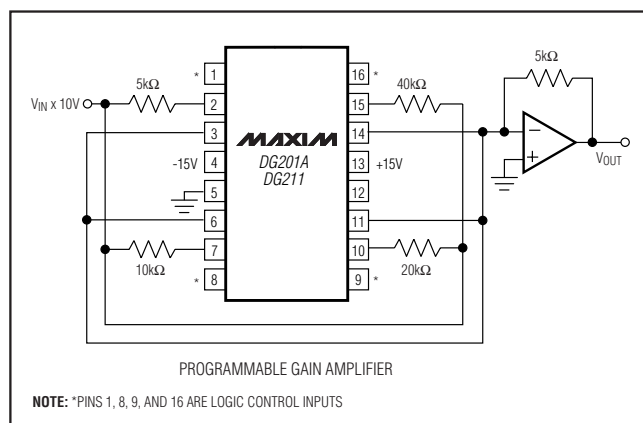

## Features

- ◆ Guaranteed  $\pm 4.5\text{V}$  to  $\pm 18\text{V}$  Operation
- ◆ No  $V_L$  Supply Required
- ◆ Nonlatching with Supplies Turned Off and Input Signals Present
- ◆ CMOS and TTL Logic Compatible
- ◆ Monolithic, Low-Power CMOS Design

## Ordering Information

| PART      | TEMP RANGE      | PIN-PACKAGE    |
|-----------|-----------------|----------------|
| DG201ACUE | 0°C to +70°C    | 16 TSSOP       |
| DG201ACSE | 0°C to +70°C    | 16 SO          |
| DG201ACJ  | 0°C to +70°C    | 16 Plastic DIP |
| DG201C/D  | 0°C to +70°C    | Dice           |
| DG201AEGE | -40°C to +85°C  | 16 QFN (5 × 5) |
| DG201AEUE | -40°C to +85°C  | 16 TSSOP       |
| DG201ADY  | -40°C to +85°C  | 16 SO          |
| DG201ADJ  | -40°C to +85°C  | 16 Plastic DIP |
| DG201AAK  | -55°C to +125°C | 16 Cerdip      |
| DG201ABK  | -25°C to +85°C  | 16 Cerdip      |
| DG211CUE  | 0°C to +70°C    | 16 TSSOP       |
| DG211CSE  | 0°C to +70°C    | 16 SO          |
| DG211CJ   | 0°C to +70°C    | 16 Plastic DIP |
| DG211C/D  | 0°C to +70°C    | Dice           |
| DG211EGE  | -40°C to +85°C  | 16 QFN (5 × 5) |
| DG211EUE  | -40°C to +85°C  | 16 TSSOP       |
| DG211DY   | -40°C to +85°C  | 16 SO          |
| DG211DJ   | -40°C to +85°C  | 16 Plastic DIP |

## Pin Configurations



# Quad SPST CMOS Analog Switches

## ABSOLUTE MAXIMUM RATINGS (DG211)

|                                                            |            |
|------------------------------------------------------------|------------|
| V+ to V-                                                   | 44V        |
| V <sub>IN</sub> to Ground                                  | V-, V+     |
| V <sub>L</sub> to Ground                                   | -0.3V, 25V |
| V <sub>S</sub> or V <sub>D</sub> to V+                     | 0, -40V    |
| V <sub>S</sub> or V <sub>D</sub> to V-                     | 0, 40V     |
| V+ to Ground                                               | 25V        |
| V- to Ground                                               | -25V       |
| Current, Any Terminal Except S or D                        | 30mA       |
| Continuous Current, S or D                                 | 20mA       |
| Peak Current, S or D<br>(pulsed at 1ms 10% duty cycle max) | 70mA       |

|                                                      |                 |
|------------------------------------------------------|-----------------|
| Storage Temperature Range                            | -65°C to +125°C |
| Operating Temperature Range                          |                 |
| DG211C                                               | 0°C to +70°C    |
| DG211D/E                                             | -40°C to +85°C  |
| Power Dissipation (T <sub>A</sub> = +70°C) (Note 1)  |                 |
| 16-Pin Plastic Dip (derate 10.5mW/°C above +70°C)    | .842mW          |
| 16-Pin Narrow SO (derate 8.3mW/°C above +70°C)       | .696mW          |
| 16-Pin TSSOP (derate 9.4mW/°C above +70°C)           | .755mW          |
| 16-Pin QFN (5 × 5)<br>(derate 19.2mW/°C above +70°C) | 1538mW          |

**Note 1:** Device mounted with all leads soldered to PC board.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS (DG211)

(V+ = +15V, V- = -15V, GND = 0, T<sub>A</sub> = +25°C, unless otherwise noted.) (For more information on TYP values see Note 2.)

| PARAMETER                             | SYMBOL                  | CONDITIONS                                                                                               |                                             | MIN  | TYP       | MAX  | UNITS |
|---------------------------------------|-------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------|------|-----------|------|-------|
| SWITCH                                |                         |                                                                                                          |                                             |      |           |      |       |
| Analog Signal Range                   | V <sub>ANALOG</sub>     |                                                                                                          |                                             | -15  |           | 15   | V     |
| Drain-Source ON-Resistance            | R <sub>DS (ON)</sub>    | V <sub>D</sub> = ±10V, V <sub>IN</sub> = 0.8V, I <sub>S</sub> = 1mA                                      |                                             |      | 115       | 175  | Ω     |
| Source OFF-Leakage Current            | I <sub>S (OFF)</sub>    | V <sub>IN</sub> = 2.4V                                                                                   | V <sub>S</sub> = 14V, V <sub>D</sub> = -14V |      | 0.01      | 5.0  | nA    |
|                                       |                         |                                                                                                          | V <sub>S</sub> = -14V, V <sub>D</sub> = 14V | -5.0 | -0.02     |      |       |
| Drain OFF-Leakage Current             | I <sub>D (OFF)</sub>    | V <sub>IN</sub> = 2.4V                                                                                   | V <sub>S</sub> = 14V, V <sub>D</sub> = -14V |      | 0.01      | 5.0  |       |
|                                       |                         |                                                                                                          | V <sub>S</sub> = -14V, V <sub>D</sub> = 14V | -5.0 | -0.02     |      |       |
| Drain ON-Leakage Current<br>(Note 3)  | I <sub>D (ON)</sub>     | V <sub>IN</sub> = 0.8V                                                                                   | V <sub>S</sub> = V <sub>D</sub> = -14V      |      | 0.1       | 5.0  |       |
|                                       |                         |                                                                                                          | V <sub>S</sub> = V <sub>D</sub> = -14V      | -5.0 | -0.15     |      |       |
| INPUT                                 |                         |                                                                                                          |                                             |      |           |      |       |
| Input Current with Input Voltage High | I <sub>INH</sub>        | V <sub>IN</sub> = 2.4V                                                                                   |                                             | -1.0 | -0.0004   |      | μA    |
|                                       |                         | V <sub>IN</sub> = 15V                                                                                    |                                             |      | 0.003 1.0 |      |       |
| Input Current with Input Voltage Low  | I <sub>INL</sub>        | V <sub>IN</sub> = 0                                                                                      |                                             | -1.0 | -0.0004   |      |       |
| DYNAMIC                               |                         |                                                                                                          |                                             |      |           |      |       |
| Turn-ON Time                          | t <sub>ON</sub>         | See Switching Time<br>Test Circuit<br>V <sub>S</sub> = 2V, R <sub>L</sub> = 1kΩ, C <sub>L</sub> = 35pF   |                                             |      | 460       | 1000 | ns    |
| Turn-OFF Time                         | t <sub>OFF1</sub>       |                                                                                                          |                                             |      | 360       | 500  |       |
|                                       | t <sub>OFF2</sub>       |                                                                                                          |                                             |      | 450       |      |       |
| Source OFF-Capacitance                | C <sub>S (OFF)</sub>    | V <sub>S</sub> = 0, V <sub>IN</sub> = 5V, f = 1MHz                                                       |                                             |      | 5         |      | pF    |
| Drain OFF-Capacitance                 | C <sub>D (OFF)</sub>    | V <sub>D</sub> = 0, V <sub>IN</sub> = 5V, f = 1MHz                                                       |                                             |      | 5         |      |       |
| Channel ON-Capacitance                | C <sub>D + S (ON)</sub> | V <sub>D</sub> = V <sub>S</sub> = 0, V <sub>IN</sub> = 0, f = 1MHz                                       |                                             |      | 16        |      |       |
| OFF-Isolation (Note 4)                | OIRR                    | V <sub>IN</sub> = 5V, R <sub>L</sub> = 1kΩ, C <sub>L</sub> = 15pF,<br>V <sub>S</sub> = 1VRMS, f = 100kHz |                                             |      | 70        |      | dB    |
| Crosstalk<br>(Channel to Channel)     | CCRR                    |                                                                                                          |                                             |      | 90        |      |       |

# Quad SPST CMOS Analog Switches

## ELECTRICAL CHARACTERISTICS (DG211) (continued)

(V+ = +15V, V- = -15V, GND = 0, T<sub>A</sub> = +25°C, unless otherwise noted.) (For more information on TYP values see Note 2.)

| PARAMETER                                   | SYMBOL          | CONDITIONS                         | MIN  | TYP  | MAX | UNITS |
|---------------------------------------------|-----------------|------------------------------------|------|------|-----|-------|
| <b>SUPPLY</b>                               |                 |                                    |      |      |     |       |
| Positive Supply Current                     | I <sup>+</sup>  | V <sub>IN</sub> = 0 and 2.4V (all) |      | 0.02 | 0.4 | mA    |
| Negative Supply Current                     | I <sup>-</sup>  |                                    |      | 0.01 | 0.4 |       |
| Logic Supply Current                        | I <sub>L</sub>  |                                    |      | 0    | 0   |       |
| Power-Supply Range for Continuous Operation | V <sub>OP</sub> |                                    | ±4.5 |      | ±18 | V     |

**Note 2:** Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.

**Note 3:** I<sub>D(ON)</sub> is leakage from driver into "ON" switch.

**Note 4:** OFF-Isolation = 20 log V<sub>S</sub>/V<sub>D</sub>, V<sub>S</sub> = input to OFF switch, V<sub>D</sub> = output.

## ABSOLUTE MAXIMUM RATINGS (DG201A)

Voltages Reference to V-

|                                                                 |                                                     |
|-----------------------------------------------------------------|-----------------------------------------------------|
| V+.....                                                         | 44V                                                 |
| GND.....                                                        | 25V                                                 |
| Digital Inputs (Note 1), V <sub>S</sub> , V <sub>D</sub> .....  | -2V to (V+ + 2V)<br>or 20mA, whichever occurs first |
| Current, Any Terminal Except S or D.....                        | 30mA                                                |
| Continuous Current, S or D.....                                 | 20mA                                                |
| Peak Current, S or D<br>(pulsed at 1ms 10% duty cycle max)..... | 70mA                                                |

Operating Temperature Range

|                                                       |                 |
|-------------------------------------------------------|-----------------|
| DG201AA.....                                          | -55°C to +125°C |
| DG201AD/E.....                                        | -40°C to +85°C  |
| DG201AC.....                                          | 0°C to +70°C    |
| Storage Temperature Range.....                        | -65°C to +150°C |
| Power Dissipation (Note 2)                            |                 |
| 16-Pin Plastic Dip (derate 10.5mW/°C above +70°C) ... | 842mW           |
| 16-Pin SO (derate 8.7mW/°C above +70°C) .....         | 696mW           |
| 16-Pin TSSOP (derate 9.4mW/°C above +70°C) .....      | 755mW           |
| 16-Pin QFN (5 × 5)                                    |                 |
| (derate 19.2mW/°C above +70°C).....                   | 1538mW          |
| 16-Pin CERDIP (derate 10.0mW/°C above +70°C).....     | 800mW           |

**Note 1:** Signals on S<sub>-</sub>, D<sub>-</sub>, or IN<sub>-</sub> exceeding V+ or V- on Maxim's DG201A will be clamped by internal diodes, and are also internally current limited to 25mA.

**Note 2:** Device mounted with all leads soldered to PC board.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS (DG201A)

(V+ = +15V, V- = -15V, GND = 0, T<sub>A</sub> = +25°C, unless otherwise noted.) (For more information on TYP values see Note 3.)

| PARAMETER                            | SYMBOL               | CONDITIONS                                                          | DG201AA                                     |     |      | DG201AC, D, E |      |       | UNITS |
|--------------------------------------|----------------------|---------------------------------------------------------------------|---------------------------------------------|-----|------|---------------|------|-------|-------|
|                                      |                      |                                                                     | MIN                                         | TYP | MAX  | MIN           | TYP  | MAX   |       |
| SWITCH                               |                      |                                                                     |                                             |     |      |               |      |       |       |
| Analog Signal Range                  | V <sub>ANALOG</sub>  |                                                                     | -15                                         |     | 15   | -15           |      | 15    | V     |
| Drain-Source ON Resistance           | R <sub>DS (ON)</sub> | V <sub>D</sub> = ±10V, V <sub>IN</sub> = 0.8V, I <sub>S</sub> = 1mA |                                             | 115 | 175  |               | 115  | 200   | Ω     |
| Source OFF-Leakage Current           | I <sub>S (OFF)</sub> | V <sub>IN</sub> = 2.4V                                              | V <sub>S</sub> = 14V, V <sub>D</sub> = -14V |     | 0.01 | 1.0           | 0.01 | 5.0   | nA    |
|                                      |                      |                                                                     | V <sub>S</sub> = -14V, V <sub>D</sub> = 14V |     | -1.0 | -0.02         | -5.0 | -0.02 |       |
| Drain OFF-Leakage Current            | I <sub>D (OFF)</sub> | V <sub>IN</sub> = 2.4V                                              | V <sub>S</sub> = 14V, V <sub>D</sub> = -14V |     | 0.01 | 1.0           | 0.01 | 5.0   |       |
|                                      |                      |                                                                     | V <sub>S</sub> = -14V, V <sub>D</sub> = 14V |     | -1.0 | -0.02         | -5.0 | -0.02 |       |
| Drain ON-Leakage Current<br>(Note 4) | I <sub>D (ON)</sub>  | V <sub>IN</sub> = 0.8V                                              | V <sub>S</sub> = -14V                       |     | 0.1  | 1.0           | 0.1  | 1.0   |       |
|                                      |                      |                                                                     | V <sub>S</sub> = 14V                        |     | -1.0 |               | -1.0 |       |       |

# Quad SPST CMOS Analog Switches

## ELECTRICAL CHARACTERISTICS (DG201A) (continued)

(V+ = +15V, V- = -15V, GND = 0, TA = +25°C, unless otherwise noted.) (For more information on TYP values see Note 3.)

| PARAMETER                                   | SYMBOL                                    | CONDITIONS                                                          |            | DG201AA    |     |            | DG201AC, D, E |     |     | UNITS |
|---------------------------------------------|-------------------------------------------|---------------------------------------------------------------------|------------|------------|-----|------------|---------------|-----|-----|-------|
|                                             |                                           |                                                                     |            | MIN        | TYP | MAX        | MIN           | TYP | MAX |       |
| INPUT                                       |                                           |                                                                     |            |            |     |            |               |     |     |       |
| Input Current with Input Voltage High       | I <sub>INH</sub>                          | V <sub>IN</sub> = 2.4V                                              |            | -1.0       |     |            | -1.0          |     |     | μA    |
|                                             |                                           | V <sub>IN</sub> = 15V                                               |            | 1.0        |     |            | 1.0           |     |     |       |
| Input Current with Input Voltage Low        | I <sub>INL</sub>                          | V <sub>IN</sub> = 0+                                                |            | -1.0       |     |            | -1.0          |     |     |       |
| DYNAMIC                                     |                                           |                                                                     |            |            |     |            |               |     |     |       |
| Turn-ON Time                                | t <sub>ON</sub>                           | See Figure 1 Switching Time Test Circuit                            |            | 480 600    |     | 480 600    |               | ns  |     |       |
| Turn-OFF Time                               | t <sub>OFF1</sub>                         |                                                                     |            | 370 450    |     | 370 450    |               |     |     |       |
| Charge Injection                            | Q                                         | C <sub>L</sub> = 1000pF, V <sub>GEN</sub> = 0, R <sub>GEN</sub> = 0 |            | 20         |     | 20         |               | pC  |     |       |
| Source OFF-Capacitance                      | C <sub>S</sub> (OFF)                      | V <sub>S</sub> = 0,                                                 | f = 140kHz | 5          |     | 5          |               | pF  |     |       |
| Drain OFF-Capacitance                       | C <sub>D</sub> (OFF)                      | V <sub>IN</sub> = 5V                                                |            | 5          |     | 5          |               |     |     |       |
| Channel ON-Capacitance                      | C <sub>D</sub> (ON) + C <sub>S</sub> (ON) | V <sub>D</sub> = V <sub>S</sub> = 0, V <sub>IN</sub> = 0            |            | 16         |     | 16         |               |     |     |       |
| OFF-Isolation                               |                                           | V <sub>IN</sub> = 5V, Z <sub>L</sub> = 75Ω                          |            | 70         |     | 70         |               | dB  |     |       |
| Crosstalk (Channel to Channel)              |                                           | V <sub>S</sub> = 2.0V, f = 100kHz                                   |            | 90         |     | 90         |               |     |     |       |
| SUPPLY                                      |                                           |                                                                     |            |            |     |            |               |     |     |       |
| Positive Supply Current                     | I <sup>+</sup>                            | All channels ON or OFF                                              |            | 0.02 0.1   |     | 0.02 0.1   |               | mA  |     |       |
| Negative Supply Current                     | I <sup>-</sup>                            | All channels ON or OFF                                              |            | -0.1 -0.01 |     | -0.1 -0.01 |               |     |     |       |
| Power-Supply Range for Continuous Operation | V <sub>OP</sub>                           |                                                                     |            | ±4.5 ±18   |     | ±4.5 ±18   |               | V   |     |       |

**Note 3:** Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.

**Note 4:** I<sub>D</sub> (ON) is leakage from driver into "ON" switch.

# Quad SPST CMOS Analog Switches

## ELECTRICAL CHARACTERISTICS (DG201A)

(V+ = +15V, V- = -15V, GND = 0, T<sub>A</sub> = full operating temperature range, unless otherwise noted.) (For more information on TYP values see Note 3.)

| PARAMETER                             | SYMBOL               | CONDITIONS                                                          |                                             | DG201AA |     |     | DG201AC, D, E |     |     | UNITS |
|---------------------------------------|----------------------|---------------------------------------------------------------------|---------------------------------------------|---------|-----|-----|---------------|-----|-----|-------|
|                                       |                      |                                                                     |                                             | MIN     | TYP | MAX | MIN           | TYP | MAX |       |
| SWITCH                                |                      |                                                                     |                                             |         |     |     |               |     |     |       |
| Analog Signal Range                   | V <sub>ANALOG</sub>  |                                                                     |                                             | -15     |     | 15  | -15           |     | 15  | V     |
| Drain-Source ON Resistance (Note 5)   | R <sub>DS (ON)</sub> | V <sub>D</sub> = ±10V, V <sub>IN</sub> = 0.8V, I <sub>S</sub> = 1mA |                                             | 250     |     |     | 250           |     |     | Ω     |
| Source OFF Leakage Current            | I <sub>S (OFF)</sub> | V <sub>IN</sub> = 2.4V                                              | V <sub>S</sub> = 14V, V <sub>D</sub> = -14V | 100     |     |     | 100           |     |     | nA    |
|                                       |                      |                                                                     | V <sub>S</sub> = -14V, V <sub>D</sub> = 14V | -100    |     |     | -100          |     |     |       |
| Drain OFF Leakage Current             | I <sub>D (OFF)</sub> | V <sub>IN</sub> = 2.4V                                              | V <sub>S</sub> = 14V, V <sub>D</sub> = -14V | 100     |     |     | 100           |     |     |       |
|                                       |                      |                                                                     | V <sub>S</sub> = -14V, V <sub>D</sub> = 14V | -100    |     |     | -100          |     |     |       |
| Drain ON Leakage Current (Note 6)     | I <sub>D (ON)</sub>  | V <sub>IN</sub> = 0.8V                                              | V <sub>S</sub> = -14V                       | 200     |     |     | 200           |     |     |       |
|                                       |                      |                                                                     | V <sub>D</sub> = 14V                        | -200    |     |     | -200          |     |     |       |
| INPUT                                 |                      |                                                                     |                                             |         |     |     |               |     |     |       |
| Input Current with Input Voltage High | I <sub>INH</sub>     | V <sub>IN</sub> = 2.4V                                              |                                             | -1.0    |     |     | -1.0          |     |     | μA    |
|                                       |                      | V <sub>IN</sub> = 15V                                               |                                             | 1.0     |     |     | 1.0           |     |     |       |
| Input Current with Input Voltage Low  | I <sub>INL</sub>     | V <sub>IN</sub> = 0                                                 |                                             | -1.0    |     |     | -1.0          |     |     |       |

**Note 5:** Electrical characteristics, such as ON-Resistance, will change when power supplies other than ±15V, are used.

**Note 6:** I<sub>D (ON)</sub> is leakage from driver into “ON” switch.

## Pin Description

| PIN          |              | NAME    | FUNCTION                                             |
|--------------|--------------|---------|------------------------------------------------------|
| DIP/SO/TSSOP | QFN          |         |                                                      |
| 1, 16, 9, 8  | 15, 14, 7, 6 | IN1–IN4 | Input                                                |
| 2, 15, 10, 7 | 16, 13, 8, 5 | D1–D4   | Analog Switch Drain Terminal                         |
| 3, 14, 11, 6 | 1, 12, 9, 4  | S1–S4   | Analog Switch Source Terminal                        |
| 4            | 2            | V-      | Negative-Supply Voltage Input                        |
| 5            | 3            | GND     | Ground                                               |
| 12           | 10           | N.C.    | No Connection                                        |
| 13           | 11           | V+      | Positive-Supply Voltage Input—Connected to Substrate |

## Switching Time Test Circuit

Switch output waveform shown for V<sub>S</sub> = constant with logic input waveform as shown. Note that V<sub>S</sub> may be +ve or -ve as per switching times test circuit. V<sub>O</sub> is the steady state output with switch on. Feedthrough via gate capacitance may result in spikes at leading and trailing edge of output waveform.

# Quad SPST CMOS Analog Switches

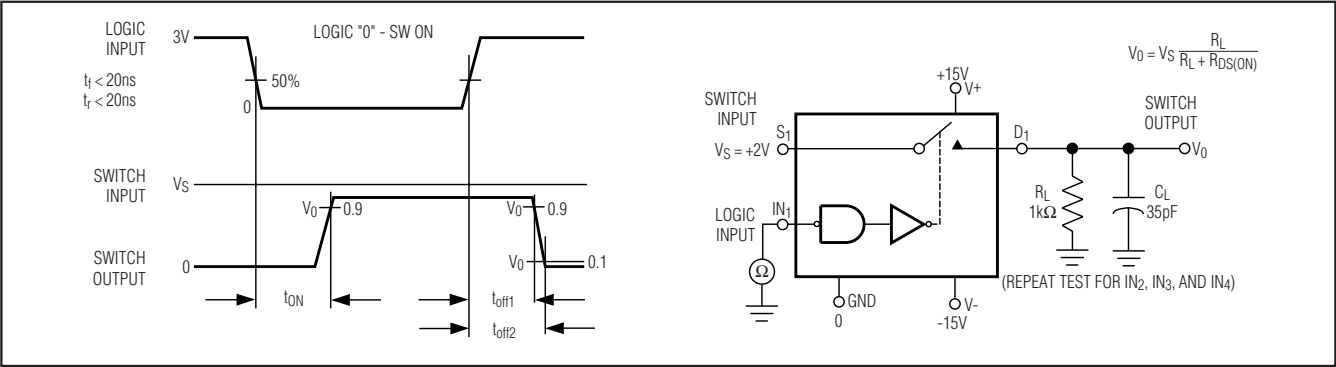


Figure 1. Switching Time

## Typical RDS(ON) vs. Power Supplies for Maxim's DG201A, and DG211

| POWER SUPPLIES | RDS(ON) AT ANALOG SIGNAL LEVEL |      |      |      |      |      |
|----------------|--------------------------------|------|------|------|------|------|
|                | -5V                            | +5V  | -10V | +10V | -15V | +15V |
| ±5V            | 350Ω                           | 380Ω | —    | —    | —    | —    |
| ±10V           | —                              | —    | 165Ω | 250Ω | —    | —    |
| ±15V           | —                              | —    | 125Ω | 160Ω | 135Ω | 155Ω |

## Protecting Against Fault Conditions

Fault conditions occur when power supplies are turned off when input signals are still present, or when overvoltages occur at the inputs during normal operation. In either case, source-to-body diodes can be forward biased and conduct current from the signal source. If this current is required to be kept to low ( $\mu\text{A}$ ) levels then the addition of external protection diodes is recommended.

To provide protection for overvoltages up to 20V above the supplies, a 1N4001 or 1N914 type diode should be placed in series with the positive and negative supplies as shown in Figure 2. The addition of these diodes will reduce the analog signal range to 1V below the positive supply and 1V above the negative supply.

## Pin Configurations (continued)

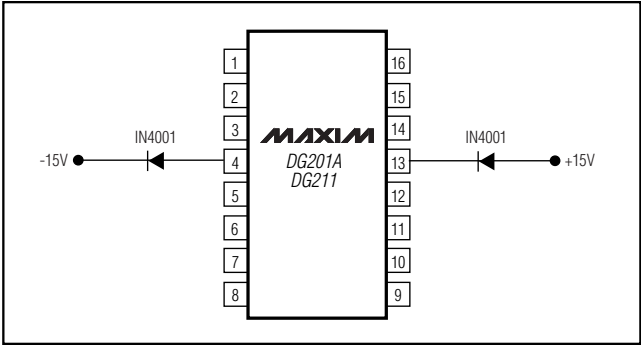
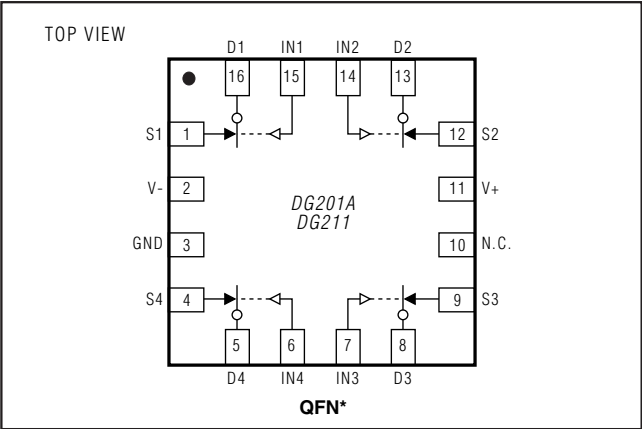


Figure 2. Protection against Fault Conditions


# Quad SPST CMOS Analog Switches

## Package Information


(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

DG201A/DG211


SOICN.EPS



TOP VIEW



FRONT VIEW



SIDE VIEW

| DIM | INCHES    |       | MILLIMETERS |      |
|-----|-----------|-------|-------------|------|
|     | MIN       | MAX   | MIN         | MAX  |
| A   | 0.053     | 0.069 | 1.35        | 1.75 |
| A1  | 0.004     | 0.010 | 0.10        | 0.25 |
| B   | 0.014     | 0.019 | 0.35        | 0.49 |
| C   | 0.007     | 0.010 | 0.19        | 0.25 |
| e   | 0.050 BSC |       | 1.27 BSC    |      |
| E   | 0.150     | 0.157 | 3.80        | 4.00 |
| H   | 0.228     | 0.244 | 5.80        | 6.20 |
| L   | 0.016     | 0.050 | 0.40        | 1.27 |

### VARIATIONS:

| DIM | INCHES |       | MILLIMETERS |       | N  | MS012 |
|-----|--------|-------|-------------|-------|----|-------|
|     | MIN    | MAX   | MIN         | MAX   |    |       |
| D   | 0.189  | 0.197 | 4.80        | 5.00  | 8  | AA    |
| D   | 0.337  | 0.344 | 8.55        | 8.75  | 14 | AB    |
| D   | 0.386  | 0.394 | 9.80        | 10.00 | 16 | AC    |

### NOTES:


1. D&E DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED 0.15mm (.006").
3. LEADS TO BE COPLANAR WITHIN 0.10mm (.004").
4. CONTROLLING DIMENSION: MILLIMETERS.
5. MEETS JEDEC MS012.
6. N = NUMBER OF PINS.

|                                                                                                                      |                      |                                                                                       |     |
|----------------------------------------------------------------------------------------------------------------------|----------------------|---------------------------------------------------------------------------------------|-----|
|  <b>DALLAS</b><br>SEMICONDUCTOR |                      |  |     |
| PROPRIETARY INFORMATION                                                                                              |                      |                                                                                       |     |
| TITLE:                                                                                                               |                      |                                                                                       |     |
| PACKAGE OUTLINE, .150" SOIC                                                                                          |                      |                                                                                       |     |
| APPROVAL                                                                                                             | DOCUMENT CONTROL NO. | REV.                                                                                  | 1/4 |
|                                                                                                                      | 21-0041              | B                                                                                     |     |

# Quad SPST CMOS Analog Switches

## Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

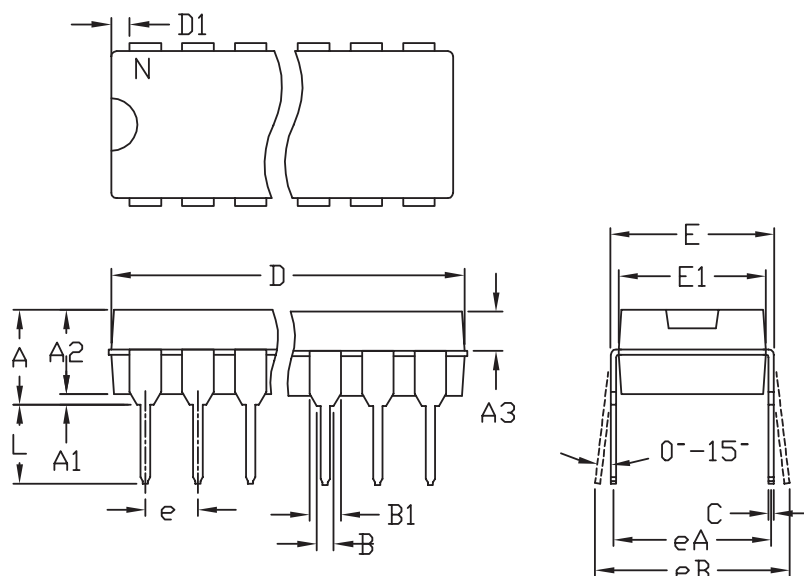

PDIPN.EPS

|    | INCHES |       | MILLIMETERS |       |
|----|--------|-------|-------------|-------|
|    | MIN    | MAX   | MIN         | MAX   |
| A  | ---    | 0.180 | ---         | 4.572 |
| A1 | 0.015  | ---   | 0.38        | ---   |
| A2 | 0.125  | 0.175 | 3.18        | 4.45  |
| A3 | 0.055  | 0.080 | 1.40        | 2.03  |
| B  | 0.015  | 0.022 | 0.381       | 0.56  |
| B1 | 0.045  | 0.065 | 1.14        | 1.65  |
| C  | 0.008  | 0.014 | 0.2         | 0.355 |
| D1 | 0.005  | 0.080 | 0.13        | 2.03  |
| E  | 0.300  | 0.325 | 7.62        | 8.26  |
| E1 | 0.240  | 0.310 | 6.10        | 7.87  |
| e  | 0.100  | BSC.  | 2.54        | BSC.  |
| eA | 0.300  | BSC.  | 7.62        | BSC.  |
| eB | 0.400  | BSC.  | 10.16       | BSC.  |
| L  | 0.115  | 0.150 | 2.921       | 3.81  |

|   | INCHES |       | MILLIMETERS |       |    |       |
|---|--------|-------|-------------|-------|----|-------|
|   | MIN    | MAX   | MIN         | MAX   | N  | MS001 |
| D | 0.348  | 0.390 | 8.84        | 9.91  | 8  | AB    |
| D | 0.735  | 0.765 | 18.67       | 19.43 | 14 | AC    |
| D | 0.745  | 0.765 | 18.92       | 19.43 | 16 | AA    |
| D | 0.885  | 0.915 | 22.48       | 23.24 | 18 | AD    |
| D | 1.015  | 1.045 | 25.78       | 26.54 | 20 | AE    |
| D | 1.14   | 1.265 | 28.96       | 32.13 | 24 | AF    |
| D | 1.360  | 1.380 | 34.54       | 35.05 | 28 | *5    |

### NOTES:

1. D&E DO NOT INCLUDE MOLD FLASH
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .15mm (.006")
3. CONTROLLING DIMENSION: MILLIMETER
4. MEETS JEDEC MS001-XX AS SHOWN IN ABOVE TABLE
5. SIMILAR TO JEDEC MO-058AB
6. N = NUMBER OF PINS



PACKAGE FAMILY OUTLINE: PDIP .300"

1/1


21-0043 D  
DOCUMENT CONTROL NUMBER REV

# Quad SPST CMOS Analog Switches

## Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)


DG201A/DG211

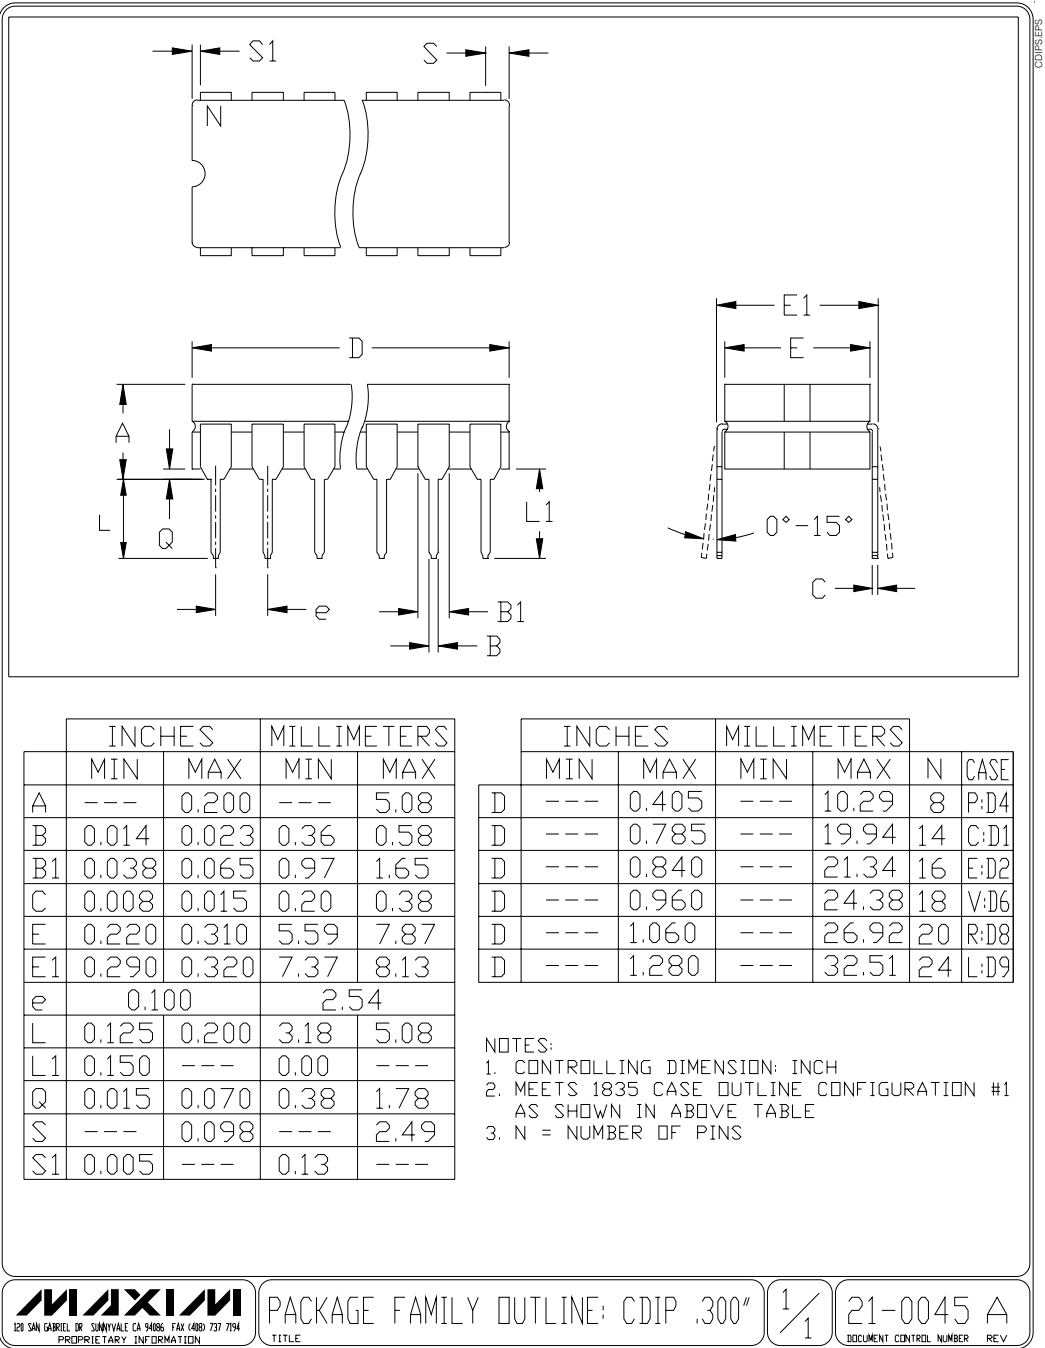

# Quad SPST CMOS Analog Switches

## Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

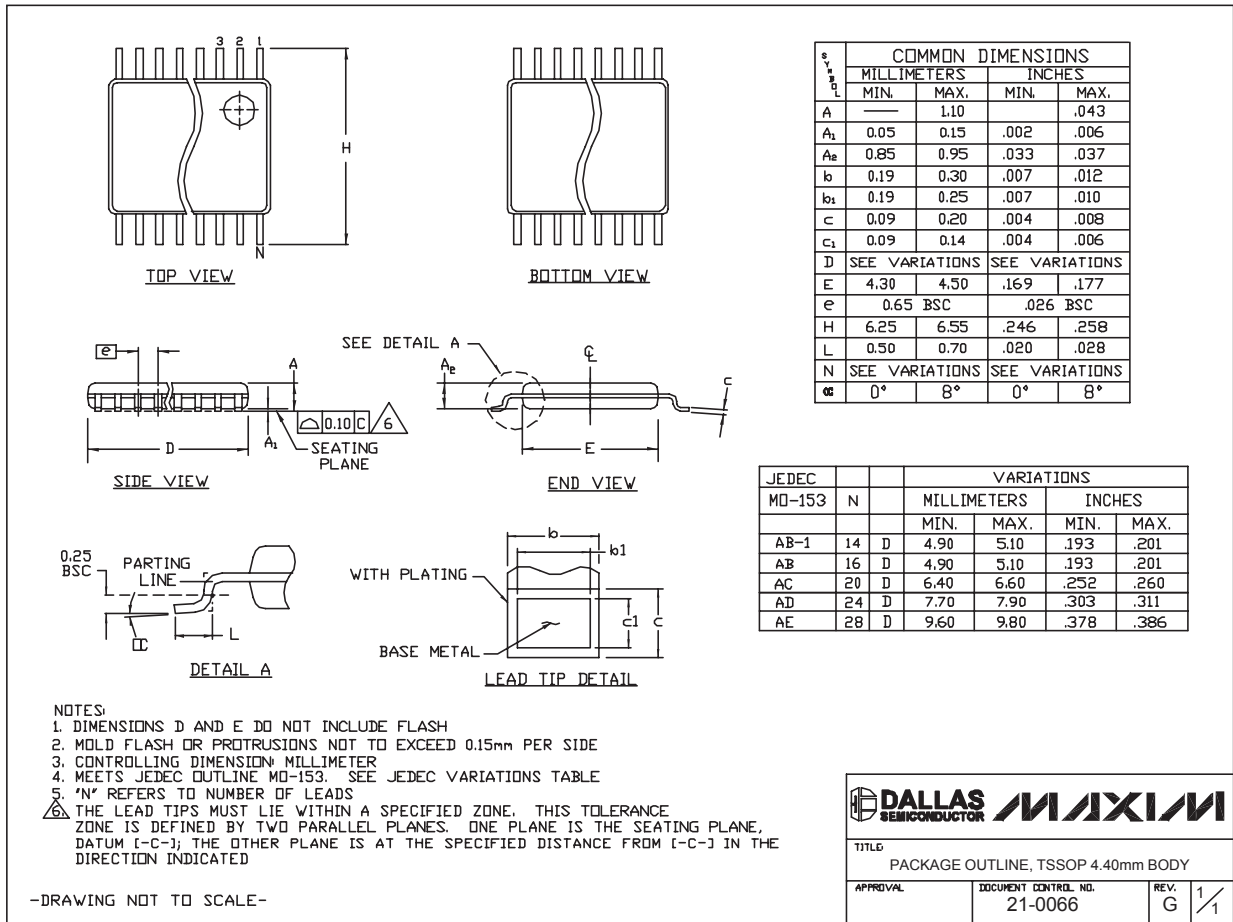


TSSOP4.40mm.EPS

# Quad SPST CMOS Analog Switches

## Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

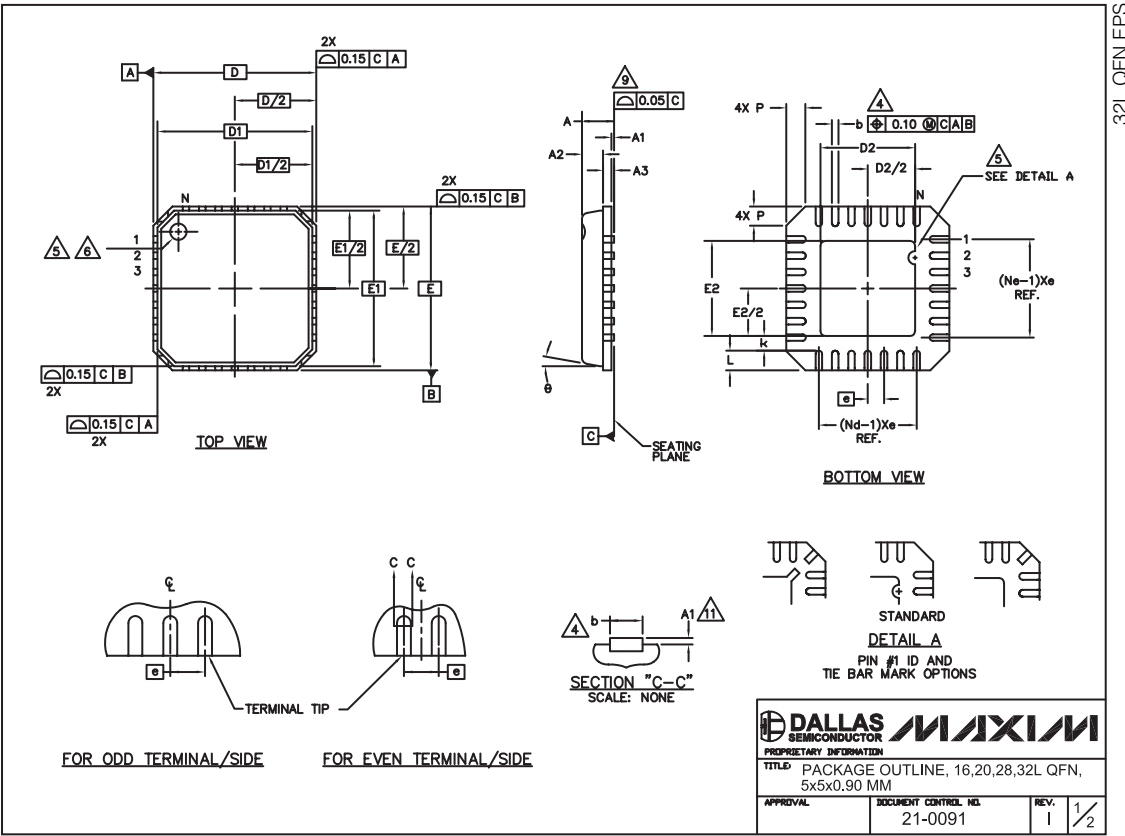

DG201A/DG211

# Quad SPST CMOS Analog Switches

## Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

| COMMON DIMENSIONS |          |      |      |          |      |      |          |      |      |          |      |      |
|-------------------|----------|------|------|----------|------|------|----------|------|------|----------|------|------|
| PKG               | 16L 5x5  |      |      | 20L 5x5  |      |      | 28L 5x5  |      |      | 32L 5x5  |      |      |
| SYMBOL            | MIN.     | NOM. | MAX. | MIN.     | NOM. | MAX. | MIN.     | NOM. | MAX. | MIN.     | NOM. | MAX. |
| A                 | 0.80     | 0.90 | 1.00 | 0.80     | 0.90 | 1.00 | 0.80     | 0.90 | 1.00 | 0.80     | 0.90 | 1.00 |
| A1                | 0.00     | 0.01 | 0.05 | 0.00     | 0.01 | 0.05 | 0.00     | 0.01 | 0.05 | 0.00     | 0.01 | 0.05 |
| A2                | 0.00     | 0.65 | 1.00 | 0.00     | 0.65 | 1.00 | 0.00     | 0.65 | 1.00 | 0.00     | 0.65 | 1.00 |
| A3                | 0.20 REF |      |      | 0.20 REF |      |      | 0.20 REF |      |      | 0.20 REF |      |      |
| b                 | 0.28     | 0.33 | 0.40 | 0.23     | 0.28 | 0.35 | 0.18     | 0.23 | 0.30 | 0.18     | 0.23 | 0.30 |
| D                 | 4.90     | 5.00 | 5.10 | 4.90     | 5.00 | 5.10 | 4.90     | 5.00 | 5.10 | 4.90     | 5.00 | 5.10 |
| D1                | 4.75 BSC |      |      | 4.75 BSC |      |      | 4.75 BSC |      |      | 4.75 BSC |      |      |
| E                 | 4.90     | 5.00 | 5.10 | 4.90     | 5.00 | 5.10 | 4.90     | 5.00 | 5.10 | 4.90     | 5.00 | 5.10 |
| E1                | 4.75 BSC |      |      | 4.75 BSC |      |      | 4.75 BSC |      |      | 4.75 BSC |      |      |
| e                 | 0.80 BSC |      |      | 0.65 BSC |      |      | 0.50 BSC |      |      | 0.50 BSC |      |      |
| k                 | 0.25     | —    | —    | 0.25     | —    | —    | 0.25     | —    | —    | 0.25     | —    | —    |
| L                 | 0.35     | 0.55 | 0.75 | 0.35     | 0.55 | 0.75 | 0.35     | 0.55 | 0.75 | 0.30     | 0.40 | 0.50 |
| N                 | 16       |      |      | 20       |      |      | 28       |      |      | 32       |      |      |
| ND                | 4        |      |      | 5        |      |      | 7        |      |      | 8        |      |      |
| NE                | 4        |      |      | 5        |      |      | 7        |      |      | 8        |      |      |
| P                 | 0.00     | 0.42 | 0.60 | 0.00     | 0.42 | 0.60 | 0.00     | 0.42 | 0.60 | 0.00     | 0.42 | 0.60 |
| ø                 | 0"       |      | 12"  | 0"       |      | 12"  | 0"       |      | 12"  | 0"       |      | 12"  |

EXPOSED PAD VARIATIONS

| PKG. CODES | D2   |      |      | E2   |      |      |
|------------|------|------|------|------|------|------|
|            | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. |
| G1655-3    | 2.95 | 3.10 | 3.25 | 2.95 | 3.10 | 3.25 |
| G2055-1    | 2.55 | 2.70 | 2.85 | 2.55 | 2.70 | 2.85 |
| G2055-2    | 2.95 | 3.10 | 3.25 | 2.95 | 3.10 | 3.25 |
| G2855-1    | 2.55 | 2.70 | 2.85 | 2.55 | 2.70 | 2.85 |
| G2855-2    | 2.95 | 3.10 | 3.25 | 2.95 | 3.10 | 3.25 |
| G3255-1    | 2.95 | 3.10 | 3.25 | 2.95 | 3.10 | 3.25 |

NOTES:

- DIE THICKNESS ALLOWABLE IS 0.305mm MAXIMUM (.012 INCHES MAXIMUM)
- DIMENSIONING & TOLERANCES CONFORM TO ASME Y14.5M. — 1994.
- N IS THE NUMBER OF TERMINALS.  
Nd IS THE NUMBER OF TERMINALS IN X-DIRECTION & Ne IS THE NUMBER OF TERMINALS IN Y-DIRECTION.
- DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.20 AND 0.25mm FROM TERMINAL TIP.
- THE PIN #1 IDENTIFIER MUST BE EXISTED ON THE TOP SURFACE OF THE PACKAGE BY USING INDENTATION MARK OR INK/LASER MARKED. DETAILS OF PIN #1 IDENTIFIER IS OPTIONAL, BUT MUST BE LOCATED WITHIN ZONE INDICATED.
- EXACT SHAPE AND SIZE OF THIS FEATURE IS OPTIONAL.
- ALL DIMENSIONS ARE IN MILLIMETERS.
- PACKAGE WARPAGE MAX 0.05mm.
- APPLIED FOR EXPOSED PAD AND TERMINALS. EXCLUDE EMBEDDED PART OF EXPOSED PAD FROM MEASURING.
- MEETS JEDEC MO220; EXCEPT DIMENSION "b".
- APPLIED FOR EXPOSED PAD AND TERMINALS. EXCLUDE EMBEDDING PART OF EXPOSED PAD FROM MEASURING.
- THIS PACKAGE OUTLINE APPLIES TO ANVIL SINGULATION (STEPPED SIDES).

DALLAS SEMICONDUCTOR

MAXIM

PROPRIETARY INFORMATION

TITLE:

PACKAGE OUTLINE, 16,20,28,32L QFN, 5x5x0.90 MM

APPROVAL

DOCUMENT CONTROL NO.

REV.

21-0091

1

2

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 \_\_\_\_\_ **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9