

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0424109416

Status:

Active

Overview:

modular_plugs_jacks

Description:

Modular Jack, Vertical, 8/2, Keyed, Panel Stops

Documents:

3D Model

Drawing (PDF)

Product Specification PS-42410 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E107635

General

Product Family

Modular Jacks/Plugs

Series

42410

Component Type

PCB Jack

Magnetic

No

Overview

modular_plugs_jacks

Performance Category

3

Power over Ethernet (PoE)

N/A

Product Name

RJ45

Physical

Boot Color

N/A

Color - Resin

Black

Durability (mating cycles max)

500

Flammability

94V-0

Inverted / Top Latch

N/A

Keying to Mating Part

Yes

Lightpipes/LEDs

None

Material - Metal

Phosphor Bronze

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

Polyester

Orientation

Vertical (Top Entry)

PCB Locator

Yes

PCB Retention

Yes

PCB Thickness Recommended (in)

0.125 In

PCB Thickness Recommended (mm)

3.18 mm

Packaging Type

Tray

Panel Mount

With Flange

Pitch - Mating Interface (in)

0.040 In

Pitch - Mating Interface (mm)

1.02 mm

Pitch - Term. Interface (in)

0.050 In

Pitch - Term. Interface (mm)

1.27 mm

Ports

1

Positions / Loaded Contacts

8/2

Surface Mount Compatible (SMC)

No

Temperature Range - Operating

-40°C to +85°C

Termination Interface: Style

Through Hole

Waterproof / Dustproof

No

Wire/Cable Type

N/A

Electrical

Current - Maximum per Contact

1.5A




image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

42410Series

Grounding to PCB	No
Grounding to Panel	None
Shielded	No
Voltage - Maximum	150V AC (RMS)
Solder Process Data	
Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	235
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-42410-492
Product Specification	PS-42410
Sales Drawing	SDA-42410-****
Test Summary	TS-42878-001

This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

20

19

18

17

16

15

14

13

12

11

10

9

8

7

6

5

4

3



2

1


NOTES:

- 1) MATERIALS: HOUSING PARTS ARE MADE OF POLYESTER, RATED U.L. 94 V-0, COLOR IS BLACK; TERMINALS ARE .015/(0.38) THICK PHOSPHOR BRONZE.
- 2) TERMINAL PLATING OPTIONS PER ES-88-***:
 - A - SELECT GOLD IN CONTACT AREA; 50 MICROINCHES MIN.,
 - *SELECT TIN IN PC TAIL AREA; 100 MICROINCHES MIN.,
 - WITH OVERALL NICKEL UNDERPLATE; 50 MICROINCHES MIN.
 - *THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD IN THE PC TAIL.
- 3) THESE MODULAR JACKS MEET THE PERFORMANCE REQUIREMENTS OF MOLEX PRODUCT SPECIFICATION PS-42410.
- 4) CONNECTORS ARE TO BE PACKED IN THERMOFORMED TRAYS, PER PACKAGING SPECIFICATION PK-42410-492.
- 5) ALL JACKS ARE DESIGNED TO BE USED WITH .062/(1.57) OR .125/(3.18) THICK P.C. BOARDS.
- 6) ALL JACKS CONFORM TO AND ACCEPT PLUGS WHICH CONFORM TO FCC RULES AND REGULATIONS PART 68, SUBPART F, WHEN PLATED WITH 50 MICROINCHES GOLD.
- 7) ALL JACKS MUST BE CAPABLE OF FITTING INTO MOLEX GAGE G-42410 (CONNECTOR SIZE 4).
- 8) SEE SHEETS 1 & 4 FOR CONNECTOR SIZE 4.
- 9) SEE SHEETS 2 & 4 FOR CONNECTOR SIZE 6.
- 10) SEE SHEET 4 FOR ASSEMBLY ITEM NUMBERS.
- 11) THIS MODULAR JACK ASSEMBLY IS ALSO AVAILABLE IN A UL 94V-0 RATED, GLASS-FILLED NYLON. (SEE MOLEX DRAWING SDA-43576)
- 12) ENGRAVED NUMBERS ON HOUSING BODY ARE FOR HOLDING IDENTIFICATION ONLY. THEY ARE NOT INTENDED FOR ASSEMBLY IDENTIFICATION PURPOSES.
- 13) ALL UNTOLERANCED DIMENSIONS ARE SHOWN FOR REFERENCE ONLY.




P.C. BOARD THICKNESS	DIM. "D" (MTG. PEGS)	DIM. "F" (P.C. TAILS)	CONNECTOR SIZE	CIRCUIT SIZE	DIM. "G"
.062/(1.57)	.128 (3.25)	.120 +.015/-.025 (3.05 +.38/-.63)	8	8	.350 (8.89)
.125/(3.18)	.191 (4.85)	.205 +.015/-.025 (5.21 +.38/-.63)	8	6	.250 (6.35)
			8	4	.150 (3.81)
			8	2	.050 (1.27)

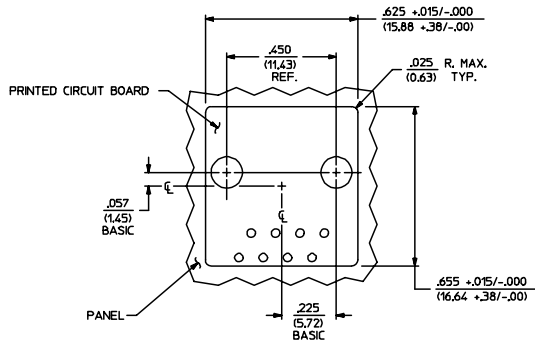

PANEL CUT-OUT FOR CONNECTOR SIZE 8

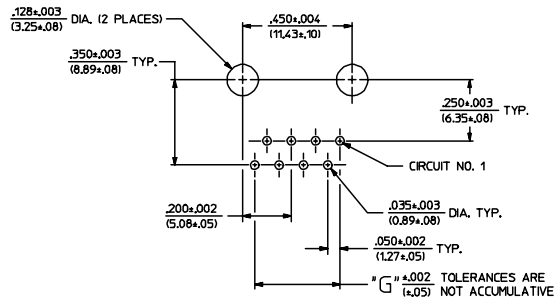

P.C. BOARD LAYOUT FOR CONNECTOR SIZE 8

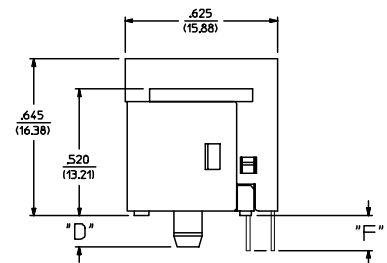

SIZE 8 MODULAR JACK LOADED WITH 8 TERMINALS SHOWN ABOVE

(SEE SHEET 4 FOR PART NUMBER AVAILABILITY)

SEE SHEET ONE EC NO. UFP2004-667 DRAWN: SCHMIDT 2004/03/03 CHKD: SCHMIDT 2004/03/03 APPR: F. SMITH 2004/03/03 REV	QUALITY SYMBOLS 0 0	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SCALE 4:1 DESIGN UNITS INCH DIMENSION STYLE IN/MM	THIRD ANGLE PROJECTION REVISE ON CAD ONLY	TITLE ASSEMBLY, VERTICAL MODULAR JACKS (CONNECTOR SIZE 8) MOLEX MOLEX INCORPORATED MATERIAL NO. (DOCUMENT NO.) SEE SHEET 4 SDA-42410-****	SHEET NO. 3 OF 4

	20	19	18	17	16	15	14	13	12	11	42410	9	8	7	6	5	4	3	2	1					
	SIZE 4 VERTICAL MODJACK ASSEMBLIES						SIZE 8 VERTICAL MODJACK ASSEMBLIES																		
	PART CHARACTERISTICS						PART CHARACTERISTICS																		
	ASSEMBLY ITEM NUMBER	EXTERNAL CONNECTOR SIZE	NUMBER OF POSITIONS	P.C. BOARD THICKNESS	MOUNTING EARS OPTION	TERMINAL PLATING OPTION	ASSEMBLY ITEM NUMBER	EXTERNAL CONNECTOR SIZE	NUMBER OF POSITIONS	P.C. BOARD THICKNESS	KEYING OPTION	MOUNTING EARS OPTION	TERMINAL PLATING OPTION												
	42410-4168	4 POS. BODY	4	.062/(1.57)	YES	A	42410-8312	8 POS. BODY	8	.062/(1.57)	NO	YES	A												
	42410-4170	↑	↑	.062/(1.57)	NO	A	42410-8314	↑	↑	.062/(1.57)	NO	NO	A												
	42410-4264	↓	↓	.125/(3.18)	YES	A	42410-8360	↑	↑	.062/(1.57)	YES	YES	A												
	42410-4266	4 POS. BODY	4	.125/(3.18)	NO	A	42410-8362	↑	↑	.062/(1.57)	YES	NO	A												
							42410-8504	↑	↑	.125/(3.18)	NO	YES	A												
	42410-4312	4 POS. BODY	2	.062/(1.57)	YES	A	42410-8506	↑	↑	.125/(3.18)	NO	NO	A												
	42410-4314	↑	↑	.062/(1.57)	NO	A	42410-8552	↓	↓	.125/(3.18)	YES	YES	A												
	42410-4408	↓	↓	.125/(3.18)	YES	A	42410-8554	8 POS. BODY	8	.125/(3.18)	YES	NO	A												
	42410-4410	4 POS. BODY	2	.125/(3.18)	NO	A																			
							42410-8600	8 POS. BODY	6	.062/(1.57)	NO	YES	A												
							42410-8602	↑	↑	.062/(1.57)	NO	NO	A												
							42410-8648	↑	↑	.062/(1.57)	YES	YES	A												
							42410-8650	↑	↑	.062/(1.57)	YES	NO	A												
							42410-8792	↑	↑	.125/(3.18)	NO	YES	A												
							42410-8794	↑	↑	.125/(3.18)	NO	NO	A												
							42410-8840	↓	↓	.125/(3.18)	YES	YES	A												
							42410-8842	8 POS. BODY	6	.125/(3.18)	YES	NO	A												
							42410-8888	8 POS. BODY	4	.062/(1.57)	NO	YES	A												
							42410-8890	↑	↑	.062/(1.57)	NO	NO	A												
							42410-8936	↑	↑	.062/(1.57)	YES	YES	A												
							42410-8938	↑	↑	.062/(1.57)	YES	NO	A												
							42410-9080	↑	↑	.125/(3.18)	NO	YES	A												
							42410-9082	↑	↑	.125/(3.18)	NO	NO	A												
							42410-9128	↓	↓	.125/(3.18)	YES	YES	A												
							42410-9130	8 POS. BODY	4	.125/(3.18)	YES	NO	A												
							42410-9176	8 POS. BODY	2	.062/(1.57)	NO	YES	A												
							42410-9178	↑	↑	.062/(1.57)	NO	NO	A												
							42410-9224	↑	↑	.062/(1.57)	YES	YES	A												
							42410-9226	↑	↑	.062/(1.57)	YES	NO	A												
							42410-9368	↑	↑	.125/(3.18)	NO	YES	A												
							42410-9370	↑	↑	.125/(3.18)	NO	NO	A												
							42410-9416	↓	↓	.125/(3.18)	YES	YES	A												
							42410-9418	8 POS. BODY	2	.125/(3.18)	YES	NO	A												

SEE SHEET ONE	EC NO: UCP2004-1617 DRAWN:LSCHMDT 2004/03/03 CHKD:LSCHMDT 2004/03/03 APPR:FSMTH 2004/03/03	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
						DIMENSION STYLE IN/MM				TITLE ASSEMBLY, VERTICAL MODULAR JACKS
				4 PLACES	± --- ± ---	DRAWN BY	DATE			
				3 PLACES	± --- ± ---	GLT	1990/10/12			
				2 PLACES	± --- ± ---	CHECKED BY	DATE			
1 PLACE	± --- ± ---	BAP	1990/10/12	MOLEX INCORPORATED		MATERIAL NO. SEE CHART	DOCUMENT NO. SDA-42410-****	SHEET NO. 4 OF 4		
ANGULAR ±1/2°		APPROVED BY		DATE						
DRAFT WHERE APPLICABLE		RAS		1990/10/12						
MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

1b_frame_D_P_ME.T Rev. C 2002/05/05	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
--	----	----	----	----	----	----	----	----	----	----	---	---	---	---	---	---	---	---	---

SEE SHEET ONE
EC NO: UFP2004-1617
DRAWN: SCHMIDT 2004/03/03
CHKD: SCHMIDT 2004/03/03
APPR: F. SMITH 2004/03/03
N

QUALITY SYMBOLS
▽ 0
▽ 0

GENERAL TOLERANCES (UNLESS SPECIFIED)
4 PLACES ± .0005 ± .0005
3 PLACES ± .0005 ± .0005
2 PLACES ± .0005 ± .0005
1 PLACE ± .0005 ± .0005
ANGULAR ±1/2°
DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

SCALE

INCH
DIMENSION STYLE
IN/MM

DESIGN UNITS
INCH

THIRD ANGLE PROJECTION
REVISE ON CAD ONLY

TITLE
ASSEMBLY, VERTICAL MODULAR JACKS

MATERIAL NO.
DOCUMENT NO.
SHEET NO.
4 OF 4

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9