


Male Style F


Series 8487 – 3 rows (3 x 16)

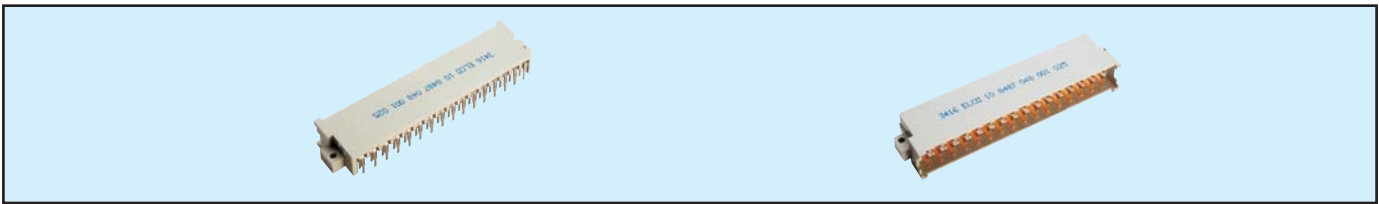


Contact Design and Termination Length	Number of Contacts	Loading Description	Part Number Performance classes according to DIN 41612	
			II	I
 3.0 mm (Y) Right Angled Pitch 5.08	32	d + z fully loaded	10 8487 048 001 026	10 8487 048 001 050
	32	b + z fully loaded	10 8487 048 001 029	10 8487 048 001 053
	32	d + z fully, Ground in z2	59 8487 048 000 055	59 8487 048 000 061
	32	d + z fully, Ground in z2 + z32	59 8487 048 000 056	59 8487 048 000 062
	32	b + z fully, Ground in z2	59 8487 048 000 057	59 8487 048 000 063
	32	b + z fully, Ground in z2 + z32	59 8487 048 000 058	59 8487 048 000 063
	48	d + b + z fully loaded	10 8487 048 001 025	10 8487 048 001 049
	48	fully loaded + Ground in z2	59 8487 048 000 053	59 8487 048 000 059
	48	fully, Ground in z2 + z32	59 8487 048 000 054	59 8487 048 000 060
	48	fully loaded + Ground in b2 + b32	59 8487 048 000 066	59 8487 048 000 065
	48	fully loaded + Ground in d2 + d32	59 8487 048 000 069	59 8487 048 000 068

NB: Alternative Prefix Variations Available: 16, please refer to Page 10.
 Additional Plating & Loading Variations: Please contact your local AVX sales office or distributor.

LOADING DESCRIPTION

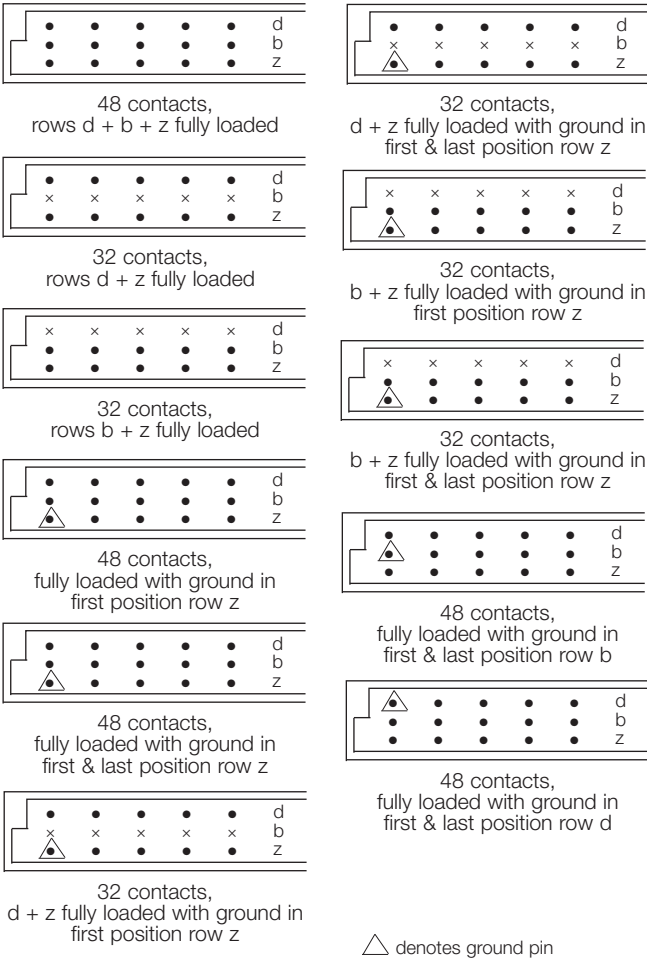

DIMENSIONS

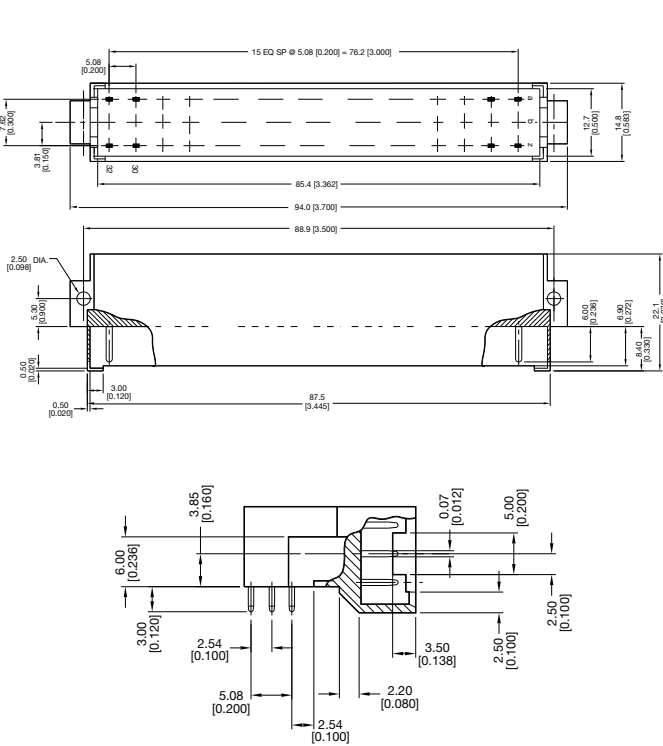

Female Style F



Series 8487 – 3 rows (3 x 16)



Contact Design and Termination Length	Number of Contacts	Loading Description	Part Number Performance classes according to DIN 41612	
			II	I
1 x 1 mm Post Profile 4.5 mm (X) Straight		48 d + b + z fully loaded	20 8487 048 001 025	20 8487 048 001 049
		32 d + z fully loaded	20 8487 048 001 026	20 8487 048 001 050
		32 b + z fully loaded	20 8487 048 001 029	20 8487 048 001 053
1 x 1 mm Post Profile 22.0 mm (X) Straight		48 d + b + z fully loaded	20 8487 048 002 025	20 8487 048 002 049
		32 d + z fully loaded	20 8487 048 002 026	20 8487 048 002 050
		32 b + z fully loaded	20 8487 048 002 029	20 8487 048 002 053
Solder eyelet 9.0 mm (X) Straight		48 d + b + z fully loaded	20 8487 048 003 025	20 8487 048 003 049
		32 d + z fully loaded	20 8487 048 003 026	20 8487 048 003 050
		32 b + z fully loaded	20 8487 048 003 029	20 8487 048 003 053
1 x 1 mm Post Profile 4.0 mm (X) Straight		48 d + b + z fully loaded	20 8487 048 004 025	20 8487 048 004 049
		32 d + z fully loaded	20 8487 048 004 026	20 8487 048 004 050
		32 b + z fully loaded	20 8487 048 004 029	20 8487 048 004 053
0.4 x 0.6 mm Post Profile 3.2 mm (X) Straight		48 d + b + z fully loaded	20 8487 048 005 025	20 8487 048 005 049
		32 d + z fully loaded	20 8487 048 005 026	20 8487 048 005 050
		32 b + z fully loaded	20 8487 048 005 029	20 8487 048 005 053

NB: Additional Plating & Loading Variations: Please contact your local AVX sales office or distributor.

LOADING DESCRIPTION DIMENSIONS

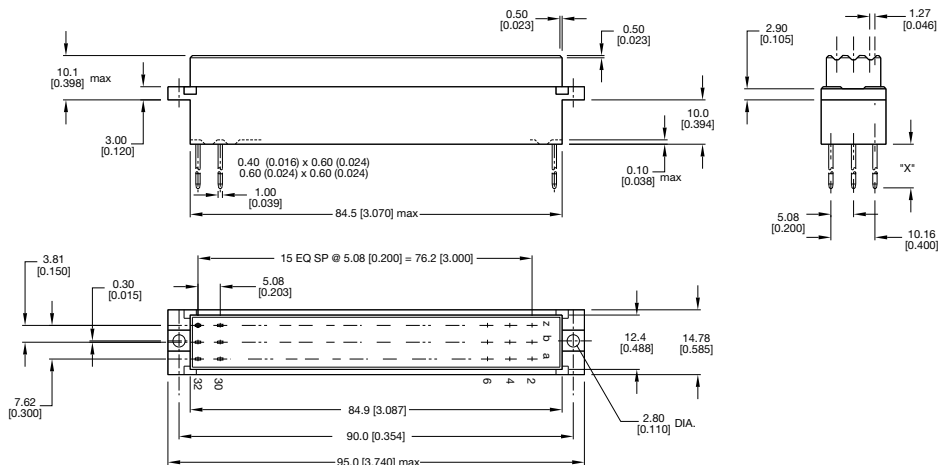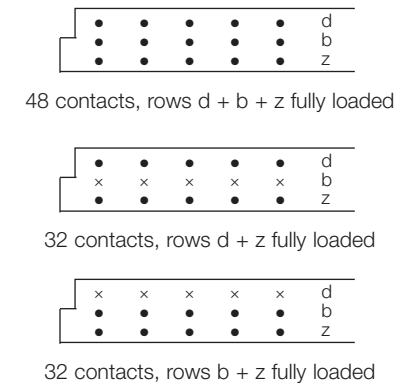

Male Style G




Series 8487 – 4 rows (4 x 16)




Contact Design and Termination Length	Number of Contacts	Loading Description	Part Number	
			Performance classes according to DIN 41612	
			II	I
3.0 mm (Y) Right Angled	64	f + d + b + z fully loaded	10 8487 064 001 025	10 8487 064 001 049

NB: Alternative Prefix Variations Available: 12, please refer to Page 10.
Additional Plating & Loading Variations: Please contact your local AVX sales office or distributor.

LOADING DESCRIPTION



DIMENSIONS

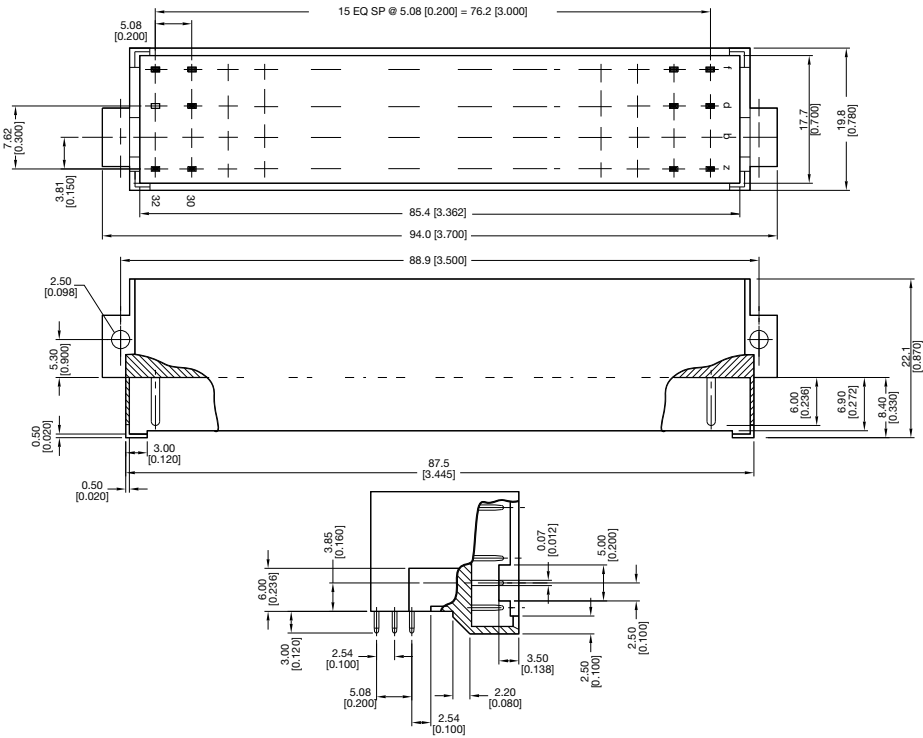

Female Style G




Series 8487 – 4 rows (4 x 16)



Contact Design and Termination Length	Number of Contacts	Loading Description	Part Number Performance classes according to DIN 41612	
			II	I
1 x 1 mm Post Profile 4.5 mm (X) Straight	64	f + d + b + z fully loaded	20 8487 064 001 025	20 8487 064 001 049
1 x 1 mm Post Profile 22.0 mm (X) Straight	64	f + d + b + z fully loaded	20 8487 064 002 025	20 8487 064 002 049


NB: Additional Plating & Loading Variations: Please contact your local AVX sales office or distributor.

LOADING DESCRIPTION



64 contacts,
rows f + d + b + z fully loaded

DIMENSIONS

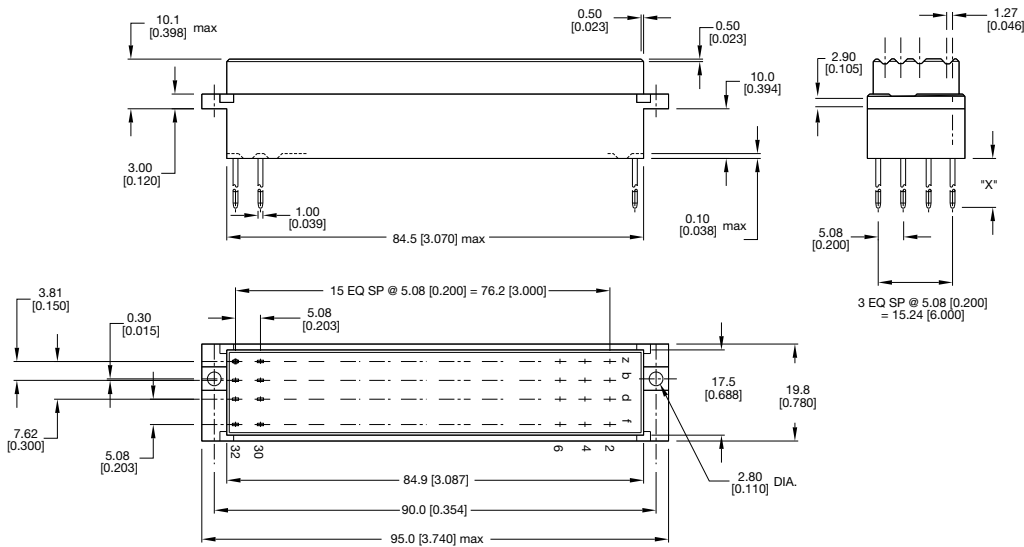

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9