



Main

| | |
|------------------------------------|--|
| Range of product | Harmony XVB Universal |
| Product or component type | Complete beacon |
| Beacon or indicator bank unit type | Base unit with direct or tube fixing mode Illuminated unit |
| Signalling type | Flashing |
| Mounting diameter | 2.76 in (70 mm) |
| Component name | XVBL |
| Material | Glass reinforced polyamide (base unit) Polycarbonate (illuminated unit) |
| Light source | Red integral flash discharge tube |
| Bulb type | Flash discharge tube |
| [Us] rated supply voltage | 120 V AC |

Complementary

| | |
|---|---|
| Connections - terminals | Screw clamp terminals, connection capacity: <= 1 x 1.5 mm ² with cable end |
| [U _i] rated insulation voltage | 250 V conforming to IEC 60947-1 |
| Nominal voltage limit | 0.85...1.1 U _n conforming to IEC 60947-5-1 |
| Current consumption | < 140 mA AC |
| [U _{imp}] rated impulse withstand voltage | 4 kV conforming to IEC 60947-1 |
| Flash energy | 5 J |
| Flashing frequency | 1 Hz |
| CAD overall width | 2.76 in (70 mm) |
| CAD overall height | 9.13 in (232 mm) |
| CAD overall depth | 2.76 in (70 mm) |
| Terminals description ISO n°1 | (COM-1)PW (GND)GROUND |
| Product weight | 0.94 lb(US) (0.425 kg) |

Environment

| | |
|-------------------------------------|--|
| product certifications | CCC CSA C22-2 No 14 GOST UL 508 |
| standards | EN/IEC 60947-5-1 |
| protective treatment | TC |
| ambient air temperature for storage | -40...158 °F (-40...70 °C) |
| electrical shock protection class | Class I (on support tube) conforming to IEC 61140 Class II (on base unit) conforming to IEC 61140 |
| IP degree of protection | IP65 (on fixing base XVBZ0.) conforming to IEC 60529 IP66 (on base unit) conforming to IEC 60529 |
| NEMA degree of protection | NEMA 4X (indoor) conforming to UL 508 |

Offer Sustainability

| | |
|--|--|
| WARNING: This product can expose you to chemicals including: | WARNING: This product can expose you to chemicals including: |
| Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. | Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. |
| For more information go to www.p65warnings.ca.gov | For more information go to www.p65warnings.ca.gov |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


Contractual warranty

Warranty period

18 months


Illuminated Beacon with “Flash” Discharge Tube Unit

Dimensions

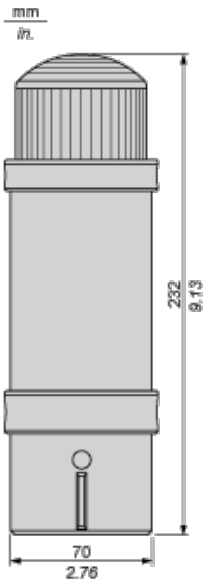

Illuminated Beacon

Wiring Diagram



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9