






Features:

- Package: white PLCC-4 package
- Small package with high efficiency
- Color coordinates: $x=0.33, y=0.33$ according to CIE 1931
- Thermal resistance: 80K/W
- ESD protection, 2KV HBM
- Soldering methods: SMT

Applications:

- Interior automotive lighting
- Backlighting
- Reading lamp
- Decorative and entertainment lighting

1. Mechanical Dimensions

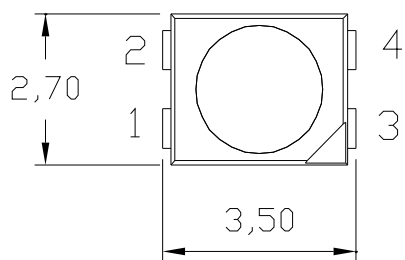


Notes:

1. Unit: mm
2. Drawings are not to scale.
3. All dimensions are in millimeter.
4. General tolerance is 0.2mm.



Recommended Solder Pad

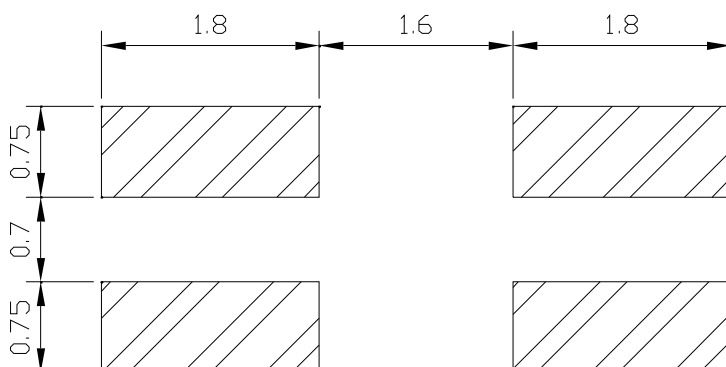

Notes:

1. Unit: mm
2. Drawings are not to scale.
3. All dimensions are in millimeter.
4. General tolerance is 0.1mm.

2. Absolute Maximum Ratings

Parameter	White series
	Value
DC Forward Current (mA)	150
Peak Pulse Current (mA)	180
LED Junction Temperature	125°C
LED Operating Temperature	-40 °C~110°C
Storage Temperature	-40°C ~120°C
Soldering Temperature	Max 260°C
ESD Sensitivity	2000V HBM
Reverse Voltage	Not design to be driven in reverse bias
	($V_R \leq 5V$)

3. General Characteristics at 150mA

3.1 Luminous Flux at 150mA, $T_a=25^{\circ}\text{C}$

Color	Part Number	Luminous Flux(lm)		Light Pattern
		Minimum	Typical	
Daylight	VAOS -SP4W4	20	25	Lambertian

Notes:

- Luminous flux measurement accuracy is 10%

3.2 Optical Characteristics at 150mA, $T_a=25^{\circ}\text{C}$

Light Pattern	Color	Correlated Color Temperature CCT			Spectral Half-width (nm)	Temperature Coefficient of λ_d (nm/ $^{\circ}\text{C}$)	Viewing Angle Degree
		Dominant Wavelength λ_d	Peak Wavelength λ_p or	Max.			
		Min.	Typ.	Max.	$\Delta\lambda_{1/2}$	$\Delta\lambda_d/\Delta T_j$	$2\theta_{1/2}$
Lambertian	Daylight	5000 K	6300 K	7000 K	--	--	120

Notes:

- CCT measurement accuracy of 200K.

3.3 Electrical Characteristics at 150mA, $T_a=25^{\circ}\text{C}$

Light Pattern	Color	Forward Voltage V_F (V)			Temperature Coefficient of V_F (mV/ $^{\circ}\text{C}$)	Thermal Resistance Junction to lead ($^{\circ}\text{C}/\text{W}$) $R\theta_{J-L}$
		Min.	Typ.	Max.		
Lambertian	Daylight		3.5	3.8	-3	

Notes:


- V_f measurement accuracy of 0.1V.

Specific binning requirements- please contact our home office




4. Wavelength Spectrum, $T_a=25^\circ\text{C}$


4.1 Daylight

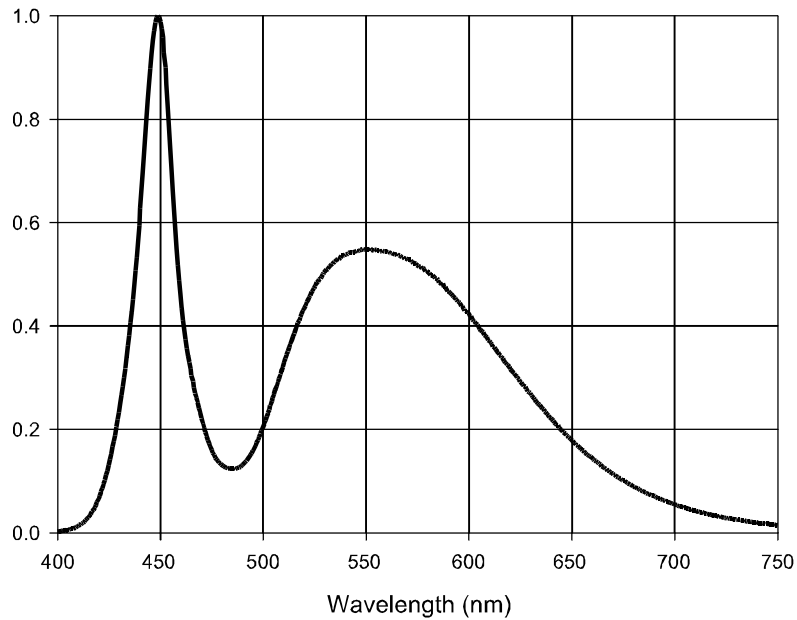


5. Forward I-V Characteristics

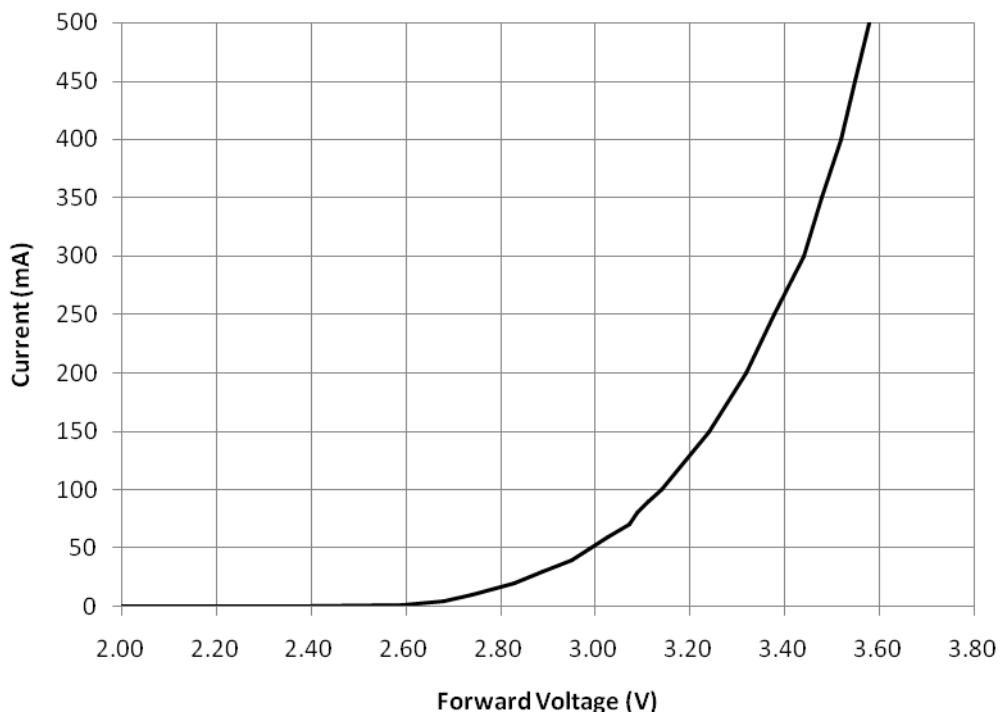


6. Forward L-I Characteristics

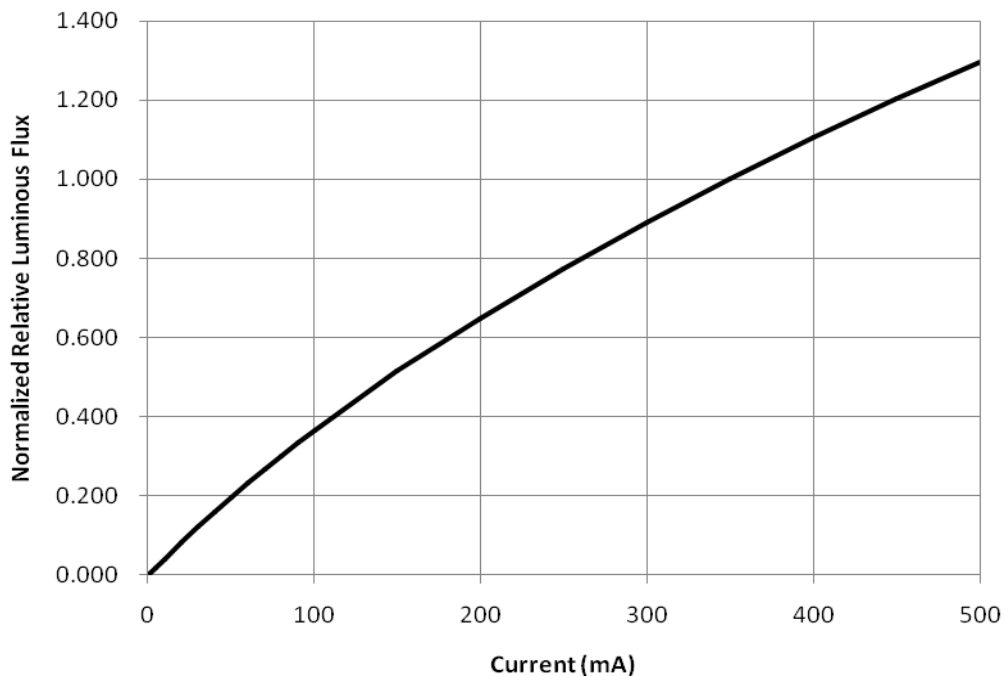

7 Packing Information

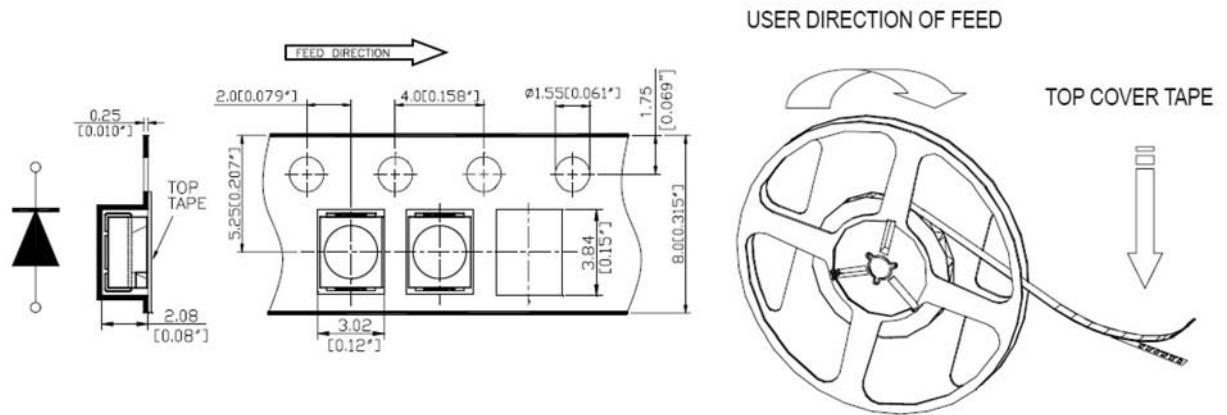

Dimensions per ANSI/EIA Standard RS-481 All dimensions are in Millimeters (inches).	
A	180[7.09]
B	60[2.36]
C	13.5[0.53]
W	8.4[0.33]
Thickness of top cover tape 0.1[0.004] MAX	

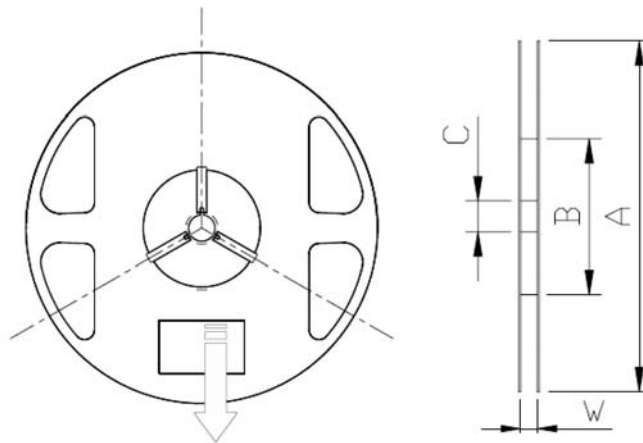

1. The cathodes is oriented towards the tape sprocket hole in accordance with ANSI/EIA RS-481 specifications.
2. 2000pcs/Reel

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9