


TE CONNECTIVITY (TE) RESERVES THE RIGHT TO CHANGE THIS DRAWING AT ANYTIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.

| REVISIONS |                           |            |          |
|-----------|---------------------------|------------|----------|
| LTR       | DESCRIPTION               | DATE       | APPROVED |
| D         | REVISED PER ECO-12-021589 | 12/11/2012 | G.WELLS  |
| E         | REVISED PER ECO-15-018009 | 12/11/2015 | I.MYONG  |

## SCOPE:

THIS SPECIFICATION PROVIDES A DESCRIPTION OF HEAT-TO-RECOVER METAL RINGS FOR TERMINATING BRAIDED SHIELD ONTO ADAPTORS DESIGNED FOR THAT PURPOSE.

## PART DESCRIPTION:

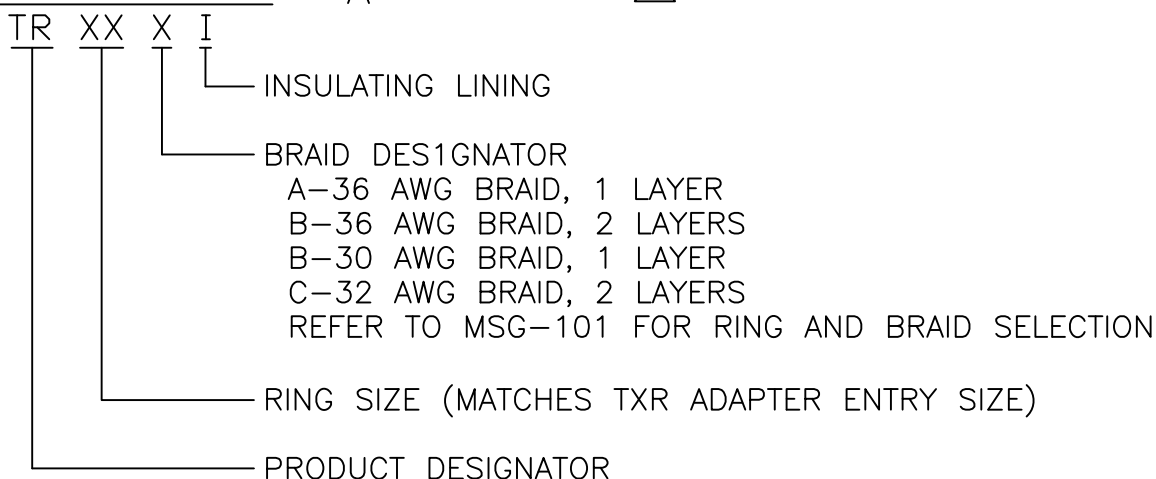


NOTES: UNLESS OTHERWISE SPECIFIED.

1. MATERIAL: NICKEL/TITANIUM HEAT-TO-RECOVER SHAP MEMORY ALLOY.
2. THE OUTSIDE SURFACE OF THE RING IS MARKED WITH TWO STRIPES OF THERMOCHROMIC PAINT WHICH CHANGE COLOR WHEN THE APPROPRIATE INSTALLATION TEMPERATURE IS REACHED.
3. "AI" RINGS ARE IDENTIFIED BY THE ABSENCE OF A RED OR BLUE DOT. REFER TO NOTE 4 BELOW.
4. "BI" RINGS ARE MARKED WITH A RED DOT. "CI" RINGS ARE MARKED WITH A BLUE DOT.
5. REFER TO MIP-101 FOR INSTALLATION PROCEDURE AND PERFORMANCE REQUIREMENT.
6. AVERAGE OF MEASUREMENTS TAKEN AT 3 POINTS, EQUALLY SPACED ON WELD AND OFF WELD.
7. SHAPE OF THE RING TO BE MOSTLY CIRCULAR. CERTAIN SIZES (LARGER) MAY HAVE MULTIPLE SIDES.

© 2015 TE CONNECTIVITY LTD. FAMILY OF COMPANIES. ALL RIGHTS RESERVED  
TE CONNECTIVITY AND TE CONNECTIVITY (LOGO) ARE TRADEMARKS.  
OTHER LOGOS PRODUCT AND/OR COMPANY NAMES MAY BE TRADEMARKS OF THEIR RESPECTIVE OWNERS.

Raychem Adapters  
CUSTOMER DRAWING

|                                                                                                            |                      |                  |                                                                                                      |                |              |
|------------------------------------------------------------------------------------------------------------|----------------------|------------------|------------------------------------------------------------------------------------------------------|----------------|--------------|
| UNLESS OTHERWISE SPECIFIED<br>DIMENSIONS ARE NOT APPLIED.                                                  | DRAWN<br>E. GOLDY    | DATE<br>05-17-93 |  TE Connectivity |                |              |
|                                                                                                            | REDRAWN<br>T. NGUYEN | DATE<br>05-17-93 |                                                                                                      |                |              |
|                                                                                                            | APPROVED<br>I. MYONG | DATE<br>12-08-15 | TITLE<br><br>TINEL-LOCK RING                                                                         |                |              |
|                                                                                                            | CAD FILE:<br>TR.dwg  |                  |                                                                                                      |                |              |
| DECIMAL TOLERANCES                                                                                         |                      |                  |                                                                                                      |                |              |
| .XXX ± -- [ mm ]                                                                                           |                      |                  |                                                                                                      |                |              |
| .XX ± -- [ mm ]                                                                                            |                      |                  |                                                                                                      |                |              |
| .X ± -- [ mm ]                                                                                             |                      |                  |                                                                                                      |                |              |
| ANGLE TOLERANCE                                                                                            |                      |                  |                                                                                                      |                |              |
| .X ± --                                                                                                    |                      |                  |                                                                                                      |                |              |
| THIRD ANGLE PROJECTION  |                      | SIZE<br>A        | CAGE CODE:<br>06090                                                                                  | DWG. NO.<br>TR | REV:<br>E    |
|                                                                                                            |                      | SCALE: NONE      |                                                                                                      |                | SHEET 1 OF 2 |

| PART<br>DESCRIPTION | $\phi A$           |                       | $\phi D$             |
|---------------------|--------------------|-----------------------|----------------------|
|                     | MIN AS<br>SUPPLIED | MAX FREE<br>RECOVERED |                      |
| TR04AI              | .397 [10.08]       | .379 [9.63]           | .073±.005 [1.85±.13] |
| TR04BI              | .416 [10.57]       | .398 [10.11]          | .073±.005 [1.85±.13] |
| TR05AI              | .460 [11.68]       | .440 [11.18]          | .073±.005 [1.85±.13] |
| TR05BI              | .479 [12.17]       | .458 [11.63]          | .073±.005 [1.85±.13] |
| TR06AI              | .523 [13.28]       | .499 [12.68]          | .073±.005 [1.85±.13] |
| TR06BI              | .548 [13.92]       | .523 [13.28]          | .073±.005 [1.85±.13] |
| TR07AI              | .586 [14.88]       | .559 [14.20]          | .073±.005 [1.85±.13] |
| TR07BI              | .606 [15.39]       | .578 [14.68]          | .073±.005 [1.85±.13] |
| TR08AI              | .650 [16.51]       | .620 [15.75]          | .073±.005 [1.85±.13] |
| TR08BI              | .670 [17.02]       | .639 [16.23]          | .073±.005 [1.85±.13] |
| TR10AI              | .782 [19.86]       | .744 [18.90]          | .073±.005 [1.85±.13] |
| TR10BI              | .802 [20.37]       | .763 [19.38]          | .073±.005 [1.85±.13] |
| TR10CI              | .830 [21.08]       | .791 [20.09]          | .073±.005 [1.85±.13] |
| TR12AI              | .912 [23.17]       | .867 [22.02]          | .073±.005 [1.85±.13] |
| TR12BI              | .931 [23.65]       | .886 [22.50]          | .073±.005 [1.85±.13] |
| TR12CI              | .960 [24.38]       | .912 [23.17]          | .073±.005 [1.85±.13] |
| TR14AI              | 1.040 [26.42]      | .988 [25.10]          | .073±.005 [1.85±.13] |
| TR14BI              | 1.060 [26.92]      | 1.007 [25.58]         | .073±.005 [1.85±.13] |
| TR14CI              | 1.089 [27.66]      | 1.033 [26.24]         | .073±.005 [1.85±.13] |
| TR16AI              | 1.171 [29.74]      | 1.111 [28.22]         | .073±.005 [1.85±.13] |
| TR16BI              | 1.191 [30.25]      | 1.129 [28.68]         | .073±.005 [1.85±.13] |
| TR16CI              | 1.216 [30.89]      | 1.154 [29.31]         | .073±.005 [1.85±.13] |
| TR18AI              | 1.301 [33.05]      | 1.234 [31.34]         | .073±.005 [1.85±.13] |
| TR18BI              | 1.320 [33.53]      | 1.252 [31.80]         | .073±.005 [1.85±.13] |
| TR20AI              | 1.430 [36.32]      | 1.357 [34.47]         | .073±.005 [1.85±.13] |
| TR20BI              | 1.450 [36.83]      | 1.376 [34.95]         | .073±.005 [1.85±.13] |
| TR22AI              | 1.543 [39.19]      | 1.463 [37.16]         | .084±.005 [2.13±.13] |
| TR22BI              | 1.561 [39.65]      | 1.481 [37.62]         | .084±.005 [2.13±.13] |
| TR24AI              | 1.673 [42.49]      | 1.587 [40.31]         | .084±.005 [2.13±.13] |
| TR24BI              | 1.691 [42.95]      | 1.605 [40.77]         | .084±.005 [2.13±.18] |
| TR28AI              | 1.932 [49.07]      | 1.838 [46.68]         | .084±.005 [2.13±.13] |
| TR28BI              | 1.950 [49.53]      | 1.858 [47.19]         | .084±.005 [2.13±.13] |

© 2015 TE CONNECTIVITY LTD. FAMILY OF COMPANIES. ALL RIGHTS RESERVED  
 TE CONNECTIVITY AND TE CONNECTIVITY (LOGO) ARE TRADEMARKS.  
 OTHER LOGOS PRODUCT AND/OR COMPANY NAMES MAY BE TRADEMARKS OF THEIR RESPECTIVE OWNERS.

Raychem Adapters  
 CUSTOMER DRAWING

|                      |                    |              |                     |                |           |
|----------------------|--------------------|--------------|---------------------|----------------|-----------|
| REDRAWN<br>T. NGUYEN | DATE<br>12-07-2015 | SIZE<br>A    | CAGE CODE:<br>06090 | DWG. NO.<br>TR | REV:<br>E |
| CAD FILE:<br>TR-CD   |                    | SCALE: NONE  |                     |                |           |
|                      |                    | SHEET 2 OF 2 |                     |                |           |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9