

Low Signal Relay G5V-2

Miniature Relay for Signal Circuits

- Suitable for handling low signals in computer peripherals, telecommunications and security equipment.
- Capable of switching loads 10 μ A to 2 A.
- Conforms to FCC part 68 1,500 V surge withstand.
- Reliable Ag + Au-clad, bifurcated crossbar contacts.
- Fully-sealed construction.
- RoHS Compliant.



Ordering Information

To Order: Select the part number and add the desired coil voltage rating (e.g., G5V-2-DC12).

| Type | Contact form | Construction | Model |
|------------------|--------------|--------------|----------|
| Standard | DPDT | Fully-sealed | G5V-2 |
| High-sensitivity | | | G5V-2-H1 |

Model Number Legend

G5V - - DC
 1 2 3

1. Contact Form

2: DPDT

2. Coil type

Blank: Standard
H1: High-sensitivity

3. Rated Coil Voltage

3, 5, 6, 9, 12, 24, 48 VDC

Specifications

■ Contact Data

| Item | Standard | High-sensitivity |
|-----------------------------------------|------------------------------------|-----------------------------------|
| Load | Resistive load (p.f. = 1) | |
| Rated load | 0.50 A at 125 VAC 2 A at 30 VDC | 0.5 A at 125 VAC 1 A at 24 VDC |
| Contact material | Ag (Au clad) | |
| Carry current | 2 A | |
| Max. operating voltage | 125 VAC 125 VDC | |
| Max. operating current | 2 A | 1 A |
| Max. switching capacity | 62.5 VA 60W | 62.5 VA 24W |
| Min. permissible load (See note) | 10 μ A, 10 mVDC | |

Note: P level: $\lambda_{60} = 0.1 \times 10^{-6}$ /operation

This value was measured at a switching frequency of 120 operations/min and the criterion of contact resistance is 50 Ω . This value may vary depending on the switching frequency and operating environment. Always double-check relay suitability under actual operating conditions.

■ Coil Data Standard Type

| Rated voltage (VDC) | Rated current (mA) | Coil resistance (Ω) | Coil inductance (Ref. value) (H) | | Pick-up voltage | Dropout voltage | Maximum voltage | Power consumption (mW) |
|---------------------|--------------------|---------------------|----------------------------------|-------------|-----------------|-----------------|-------------------|------------------------|
| | | | Armature OFF | Armature ON | | | | |
| 3 | 166.70 | 18 | 0.04 | 0.05 | 75% max. | 5% min. | 120% max. at 23°C | Approx. 500 |
| 5 | 100 | 50 | 0.09 | 0.11 | | | | |
| 6 | 83.30 | 72 | 0.16 | 0.19 | | | | |
| 9 | 55.60 | 162 | 0.31 | 0.49 | | | | |
| 12 | 41.70 | 288 | 0.47 | 0.74 | | | | |
| 24 | 20.80 | 1,152 | 1.98 | 2.63 | | | | |
| 48 | 12 | 4,000 | 7.23 | 10.00 | | | | |
| | | | | | | | | Approx. 580 |

High-sensitivity Type

| Rated voltage (VDC) | Rated current (mA) | Coil resistance (Ω) | Coil inductance (Ref. value) (H) | | Pick-up voltage | Dropout voltage | Maximum voltage | Power consumption (mW) |
|---------------------|--------------------|---------------------|----------------------------------|-------------|-----------------|-----------------|-------------------|------------------------|
| | | | Armature OFF | Armature ON | | | | |
| 3 | 50 | 60 | 0.18 | 0.57 | 75% max. | 5% min. | 180% max. at 23°C | Approx. 150 |
| 5 | 30 | 166.7 | 0.46 | 0.71 | | | | |
| 6 | 25 | 240 | 0.70 | 0.97 | | | | |
| 9 | 16.70 | 540 | 1.67 | 2.33 | | | | |
| 12 | 12.50 | 960 | 2.90 | 3.99 | | | | |
| 24 | 8.33 | 2,880 | 6.72 | 9.27 | | | | |
| 48 | 6.25 | 7,680 | 20.10 | 26.70 | | | | |
| | | | | | | | | Approx. 200 |
| | | | | | | | | Approx. 300 |

- Note:** 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.
 2. The operating characteristics are measured at a coil temperature of 23°C.
 3. The maximum voltage is the highest voltage that can be imposed on the relay coil.

Characteristics

| | | |
|-------------------------------------------|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Contact resistance (See note 1) | | 50 mΩ max. (G5V-2); 100 mΩ max. (G5V-2-H1) |
| Operate time (See note 2) | | 7 ms max. (mean value: approx. 3.5 ms) |
| Release time (See note 2) | | 3 ms max. (mean value: approx. 0.8 ms) |
| Operating frequency (max.) | Mechanical | 36,000 operations/hour |
| | Electrical | 1,800 operations/hour (under rated load) |
| Insulation resistance (See note 3) | | 1,000 MΩ min (at 500 VDC) |
| Dielectric strength | | 1,000 VAC, 50/60 Hz for 1 minute between coil and contacts 1,000 VAC, 50/60 Hz for 1 minute between contacts of different poles 750 VAC, 50/60 Hz for 1 minute between contacts of same poles (500 VAC, 50/60 Hz for 1 minute between contacts of same poles for high-sensitive type) |
| Surge withstand voltage | | 1,500 V (10 X 160 μs) between coil and contacts (conforms to part 68 of FCC rules) |
| Vibration | Mechanical durability | 10 to 55 Hz, 1.50 mm double amplitude |
| | Malfunction durability | |
| Shock | Mechanical durability | 1,000 m/s ² (approx. 100 G) |
| | Malfunction durability | 200 m/s ² (approx. 20 G), 100 m/s ² (approx. 10 G) for high-sensitive type |
| Ambient temperature | | Operating/storage -25° to 70°C (“-H1” versions) with no icing -25° to 65°C (standard versions) with no icing |
| Humidity | | 5% to 85% RH |
| Service life | Mechanical | 15 million operations min. (at operating frequency of 36,000 operations/hour) |
| | Electrical | 100,000 operations min. (at 1,800 operations/hr), standard models. See “Characteristic Data” |
| Weight | | Approx. 5 g |

- Note:** 1. The contact resistance was measured with 10 mA at 1 VDC with a fall-of-potential method.
 2. Values in parentheses are typical values unless otherwise stated.
 3. The insulation resistance was measured with a 500-VDC megohmmeter applied to the same parts as those for checking the dielectric strength.
 4. The above values are initial values.

Characteristic Data

G5V-2


Maximum Switching Capacity



Electrical Service Life




Ambient Temperature vs. Maximum Coil Voltage

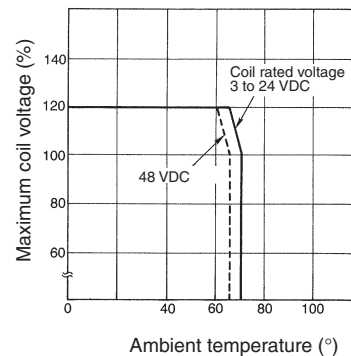


Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

G5V-2-H1


Maximum Switching Capacity

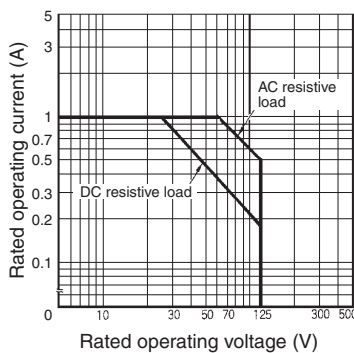

Electrical Service Life

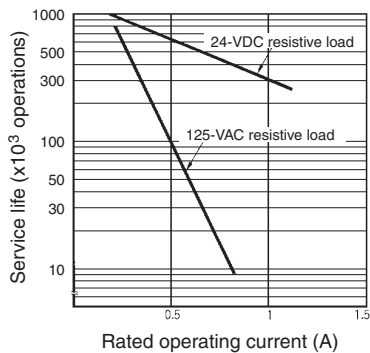

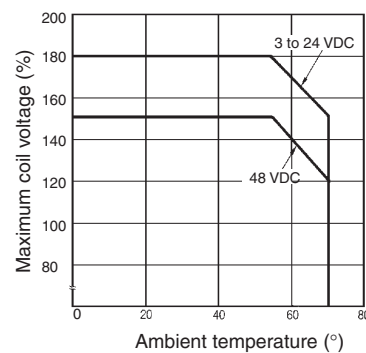

Ambient Temperature vs. Maximum Coil Voltage



Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

Dimensions

- Note:** 1. All units are in millimeters unless otherwise indicated.
 2. Tolerance: ± 0.1
 3. Orientation marks are indicated as follows:  

G5V-2, G5V-2-H1



Approvals

UL Recognized (File No. E41515) / CSA Certified (File No. LR31928) - - Ambient Temp. = 40°C

| Type | Contact form | Coil rating | Contact ratings |
|----------|--------------|-------------|---------------------------------------------------------------------------------------------|
| G5V-2 | DPDT | 3 to 48 VDC | 0.6 A at 125 VAC (General Use) 0.6 A at 110 VDC (Resistive) 2 A at 30 VDC (Resistive) |
| G5V-2-H1 | | 3 to 48 VDC | 0.5 A at 125 VAC (General Use) 0.2 A at 110 VDC (Resistive) 1 A at 24 VDC (Resistive) |

- Note:** 1. The rated values approved by each of the safety standards may be different from the performance characteristics individually defined in this catalog.
 2. In the interest of product improvement, specifications are subject to change.

Precautions

Long-term Continuously ON Contacts

Using the Relay in a circuit where the Relay will be ON continuously for long periods (without switching) can lead to unstable contacts because the heat generated by the coil itself will affect the insulation, causing a film to develop on the contact surfaces. Be sure to use a fail-safe circuit design that provides protection against contact failure or coil burnout.

Relay Handling

When washing the product after soldering the Relay to a PCB, use a water-based solvent or alcohol-based solvent, and keep the solvent temperature to less than 40°C. Do not put the Relay in a cold cleaning bath immediately after soldering.

A large grid of 20 columns and 30 rows of small squares, intended for taking notes. The grid is composed of thin lines forming a uniform pattern of squares across the page.

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON[®]

**OMRON ELECTRONIC
COMPONENTS LLC**

55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

OMRON ON-LINE

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>

Cat. No. X301-E-1b

09/11

Specifications subject to change without notice

Printed in USA

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9