

3500 SERIES/LOW THERMAL EMF REED RELAYS

3500 Series Low Thermal EMF Reed Relays

The 3500 Series is ideally suited to the needs of Instrumentation, Data Acquisition and Process Control. The specification tables allow you to select the appropriate relay for your particular application. Recommended for use in high accuracy DVM's, Multiplexers and Digital or Analog Multipoint Recorders. If your requirements differ from the selection options, please consult Coto's Factory to discuss a custom reed relay.

3500 Series Features

- ▶ Low Thermal EMF: < 10 μ V through < 0.5 μ V with 50 nV stability
- ▶ Patented Low Thermal Design. U.S. Patent #4,084,142
- ▶ Low power coils to ensure low thermal EMF
- ▶ High Insulation Resistance - $10^{12}\Omega$
- ▶ Control/Signal isolation of 1500 VDC
- ▶ High reliability, hermetically sealed contacts
- ▶ Form A, Dry or Hg Wetted contacts. High Dielectric Strength
- ▶ Epoxy coated steel shell provides magnetic shielding
- ▶ RoHS compliant (except for 3520)




DIMENSIONS

in Inches (Millimeters)



For Model
3501 & 3540

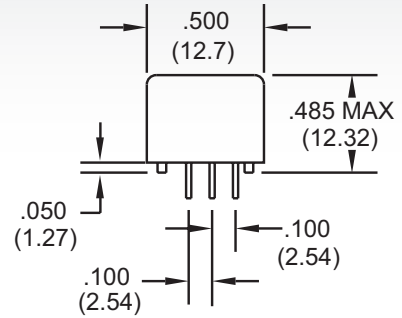

For Model
3502, 3520 & 3541



Bottom View

Ordering Information

| Part Number | XXXX-XX-XIX | Shielding Options ² |
|--------------|---------------------------|--------------------------------|
| Model Number | 3501 3502 3520 3540 3541 | 1=Electrostatic Shield |
| Coil Voltage | 05=5 volts 12=12 volts | |

Thermal EMF Rating

See available ratings in specification table.

- 1=<10 μ V Hg Wetted Only
- 9=<5 μ V Dry or Wetted
- 8=<3 μ V Dry Only
- 7=<1 μ V Dry Only
- 5=<0.5 μ V Dry Only

| MODEL NUMBER | | | 3501 ² | 3502 ² | 3520 ^{2,3} | 3540 ² | 3541 ² |
|---|--|------------------------|--|--|---|--|--|
| Parameters | Test Conditions | Units | 1 Form A | 2 Form A | 1 Form A Hg Wetted | 1 Form A High Voltage | 2 Form A High Voltage |
| Thermal EMF Options | Measured after 5 minutes at nominal coil voltage (Refer to Reed Relay Technical Section for details) | μV | Individual <5 μV <3 μV <1 μV <0.5 μV | Differential <5 μV <3 μV <1 μV <0.5 μV | Differential <10 μV <5 μV - - | Individual <5 μV <3 μV - - | Differential <5 μV <3 μV - - |
| COIL SPECS. | | | | | | | |
| Nom. Coil Voltage | | VDC | 5 12 | 5 12 | 5 12 | 5 12 | 5 12 |
| Coil Resistance | +/- 10%, 25° C | Ω | 350 2000 | 350 2000 | 200 850 | 250 1500 | 250 1500 |
| Operate Voltage | Must Operate by | VDC - Max. | 3.8 9.0 | 3.8 9.0 | 3.8 9.0 | 3.8 9.0 | 3.8 9.0 |
| Release Voltage | Must Release by | VDC - Min. | 0.4 1.0 | 0.4 1.0 | 0.4 1.0 | 0.4 1.0 | 0.4 1.0 |
| CONTACT RATINGS | | | | | | | |
| Switching Voltage | Max DC/Peak AC Resist. | Volts | 200 | 200 | 500 | 500 | 500 |
| Switching Current | Max DC/Peak AC Resist. | Amps | 0.5 | 0.5 | 1.0 | 0.5 | 0.5 |
| Carry Current | Max DC/Peak AC Resist. | Amps | 1.5 | 1.5 | 2.0 | 2.0 | 2.0 |
| Contact Rating | Max DC/Peak AC Resist. | Watts | 10 | 10 | 28 | 10 | 10 |
| Life Expectancy-Typical ¹ | Signal Level 1.0V, 10mA | x 10 ⁶ Ops. | 500 | 100 | 1000 | 100 | 100 |
| Static Contact Resistance (max. init.) | 50mV, 10mA | Ω | 0.200 | 0.100 | 0.050 | 0.200 | 0.100 |
| Dynamic Contact Resistance (max. init.) | 0.5V, 50mA at 100 Hz, 1.5 msec | Ω | 0.300 | 0.200 | 0.100 | 0.300 | 0.200 |
| RELAY SPECIFICATIONS | | | | | | | |
| Insulation Resistance (minimum) | Between all Isolated Pins at 100V, 25°C, 40% RH | Ω | 10 ¹² | 10 ¹² | 10 ¹² | 10 ¹² | 10 ¹² |
| Capacitance - Typical | No Shield | pF | 3.0 | 1.7 | 1.7 | 3.0 | 1.7 |
| Across Open Contacts | Shield Guarding | pF | 1.9 | 0.2 | 0.2 | 1.9 | 0.2 |
| Dielectric Strength (minimum) | Between Contacts | VDC/peak AC | 700 | 350 | 1000 | 1500 | 1500 |
| | Contacts to Shield | VDC/peak AC | 1000 | 1000 | 1000 | 1000 | 1000 |
| | Contacts/Shield to Coil | VDC/peak AC | 1500 | 1500 | 1500 | 1500 | 1500 |
| Operate Time - including bounce - Typical | At Nominal Coil Voltage, 30 Hz Square Wave | msec. | 0.75 | 0.75 | 2.0 | 1.0 | 1.0 |
| Release Time - Typical | | msec. | 0.1 | 0.1 | 1.0 | 0.2 | 0.2 |

Top View⁴:
Dot stamped on top of relay refers to pin #1 location
Grid = .1"x.1" (2.54mm x 2.54mm)



Notes:

¹ Consult factory for life expectancy at other switching loads.

² Models 3501 and 3540, optional electrostatic shield is tied to pin #5.

Models 3502, 3520 and 3541, optional electrostatic shield is tied to pin #13.

³ Model 3520 has Hg wetted contacts - position sensitive, must be mounted within 30° of vertical plane. See schematic. Hg content per capsule: Form A, 0.04 grams.

Environmental Ratings:

Storage Temp: -35°C to +100°C; Operating Temp: -20°C to +85°C; Solder Temp: 270°C max; 10 sec. max

All electrical parameters measured at 25°C unless otherwise specified.

Vibration: 20 G's to 2000 Hz; Shock: 50 G's

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9